

TINCEE

Life's Smoother

家居五金产品手册
PRODUCT CATALOGUE 2025

天斯 TINCEE PRODUCT CATALOGUE 2025

佛山市天斯五金有限公司
FOSHAN TIANSI HARDWARE CO., LTD
佛山市天斯创品五金科技有限公司
FOSHAN TIANSI CHUANGPIN HARDWARE TECHNOLOGY CO., LTD
中国广东省佛山市顺德区龙江镇龙洲西路集北天斯工业园
Tiansi industry park, Jibei, Longzhouxilu, Longjiang,
Shunde, Foshan, Guangdong, China.
Tel.: 0086-757-29968696
Mob.: 0086-13929965527
Https://www.tincee456.com
E-mail: sales1@zhongqiaohardware.com (European)
sales2@zhongqiaohardware.com (Other countries)

TINCEE 天斯 社交媒体官方账号



公众号




Youtube



抖 音



X(twitter)



小 红 书



Linkedin

天斯 TINCEE

Tincee Hardware

Life's Smoother


匠心家具好伙伴

A TRUSTED PARTNER FOR HOME FURNISHING ENTERPRISES

天斯TINCEE，ODM国际顶尖品牌30年，我们“起步与世界同步，品质与世界共享”，是国际铰链滑轨革新者，长期以来致力于做匠心家具好伙伴，为家具匠人、高端定制等追求卓越品质的家居企业，提供顶尖五金产品和服务。

As a top international ODM brand with 30 years' experience, Tincee is an innovator in cabinet hinges and drawer slides manufacturing, "aligning with global standards from inception and pursuing premium quality".

Over a long period, Tincee has been dedicated itself to being a trusted partner in the home furnishing industry while providing high-quality hardware products and services for those excellent craftsmen.

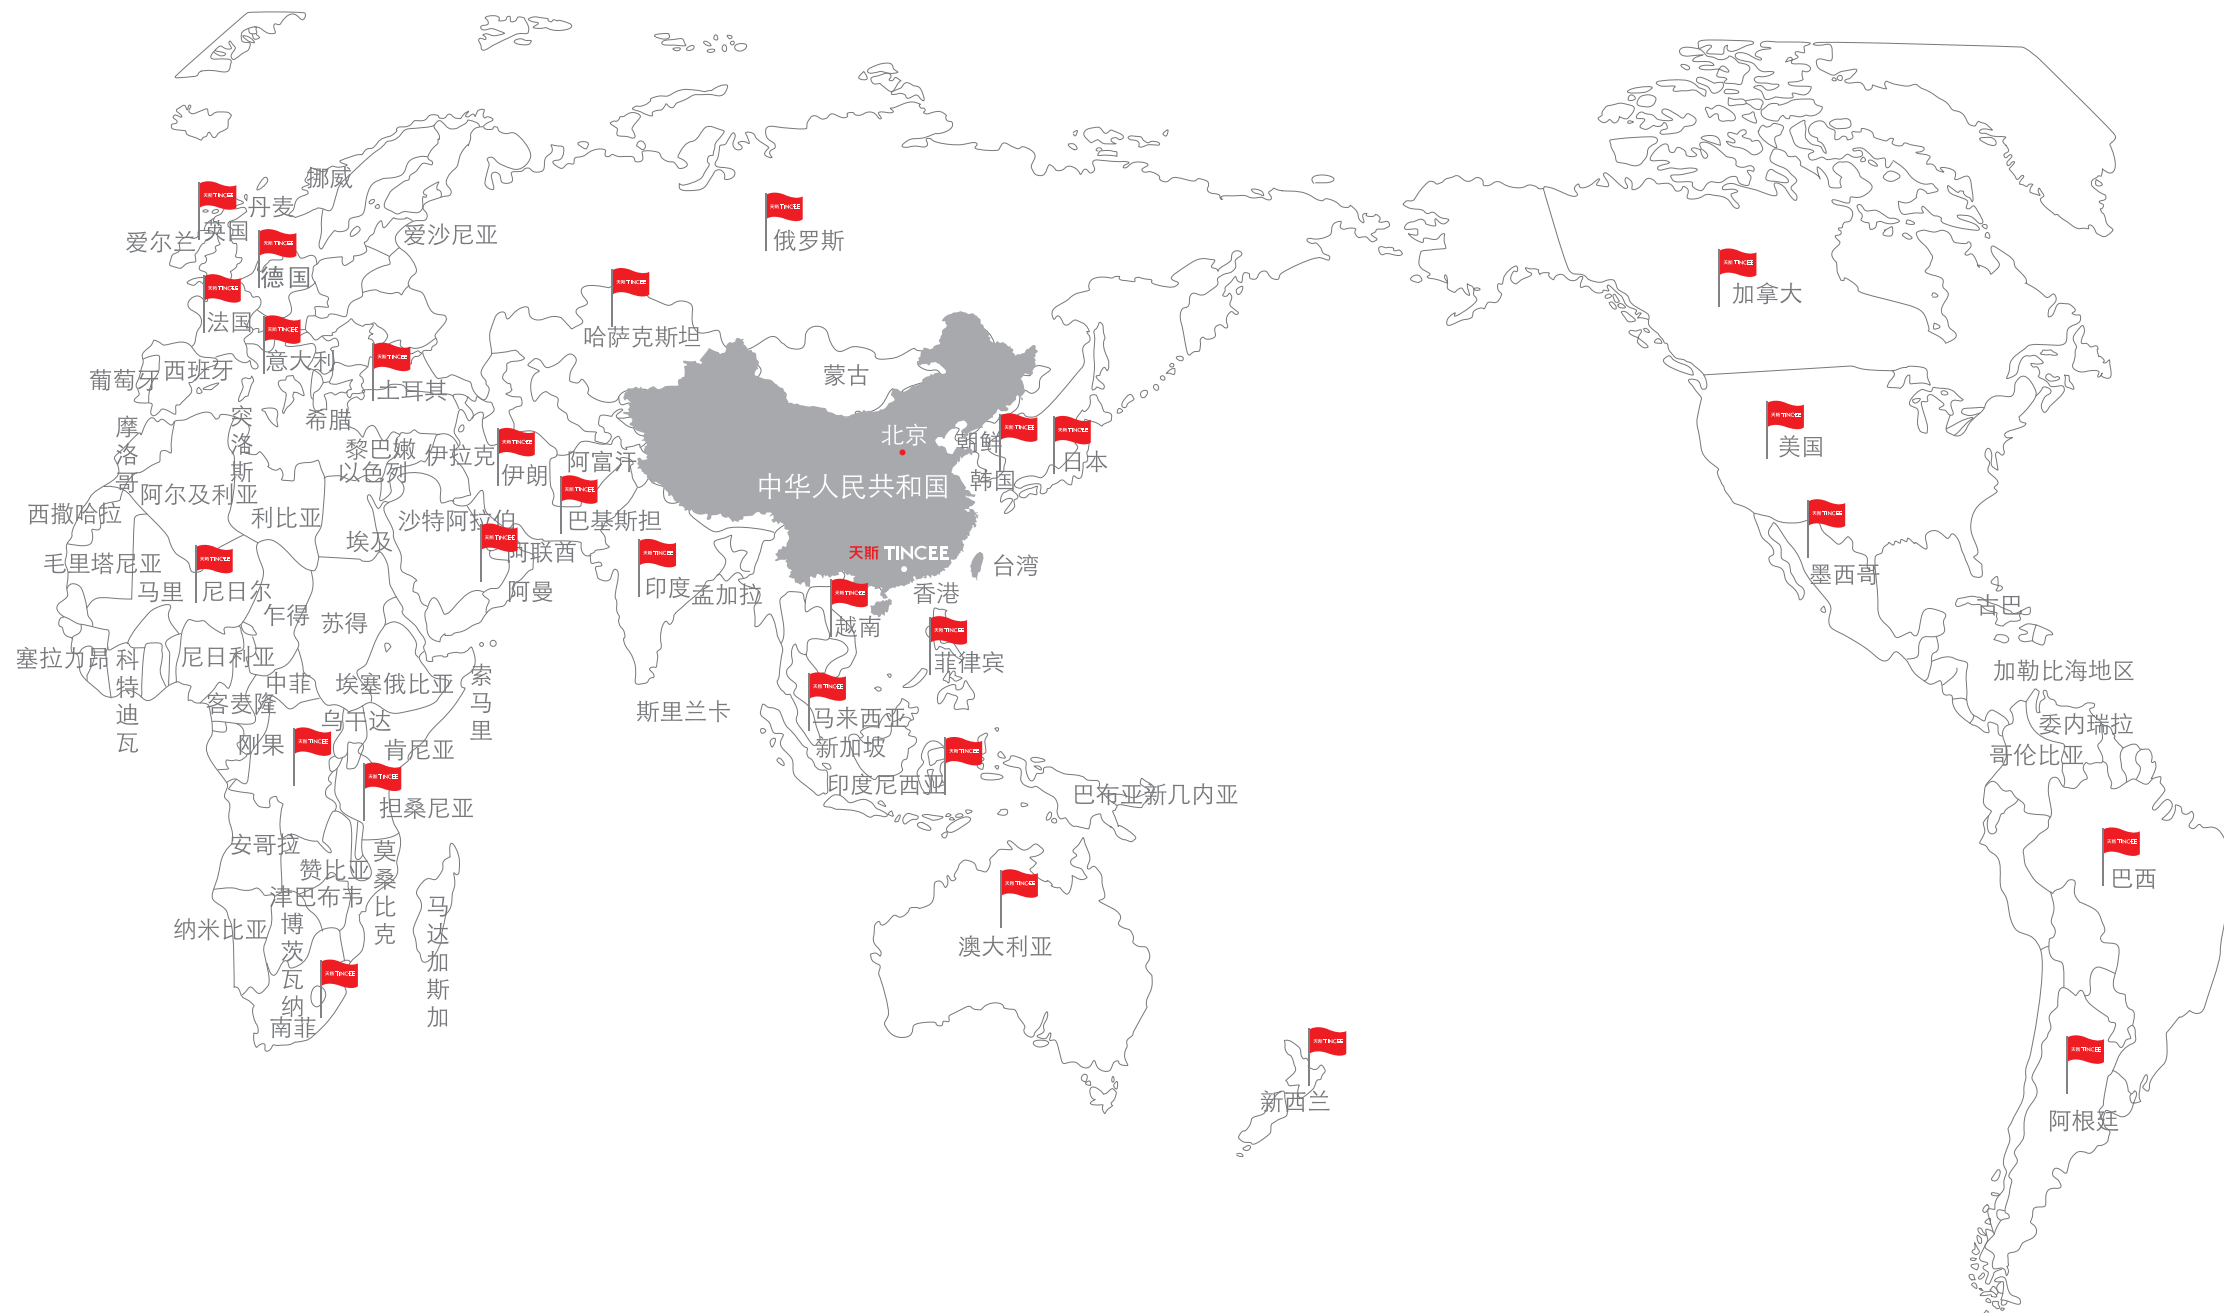

天斯 TINCEE

An aerial photograph of the Tincee Innovation Industrial Park. The park features several large, modern industrial buildings with flat roofs and multiple stories. The buildings are primarily light-colored with some orange accents. One building prominently displays the '天斯 TINCEE' logo and '456' in red. The park is situated in an urban area, with a dense city skyline and high-rise apartment buildings visible in the background. A major road with multiple lanes and traffic is in the foreground, and a green hill is visible in the distance under a blue sky with scattered clouds.

天斯 TINCEE

天斯创新工业园 INNOVATION INDUSTRIAL PARK

公司总体规模达258亩，3个厂区(铰链、滑轨、塑料件)，建筑面积30万平方米，是中国最大的家居五金生产商之一。

TINCEE is one of the largest home hardware and furniture fittings manufacturers in China, with 3 factories(hinges, drawer slides, plastic parts), and the production area is over 300,000 square meters.

1996
2025

公司介绍 INTRODUCTION

佛山市天斯五金有限公司，是以一家集研发、制造、销售于一体的现代化智造高新企业。产品涵盖铰链、钢珠滑轨、隐藏滑轨、骑马抽以及灯光系统等。

公司厂房位于中国制造业核心区域之一的广东顺德，秉承为中国现代家居企业提供国际最高标准的五金和不断创新的伟大目标，做推动中国五金技术发展的革新者。提供性价比最高的家居五金及无微不至的售前售后服务。

公司拥有雄厚的科研实力，现已获得发明专利三十多项，实用型专利数百项，在充分引进与吸收国外先进技术的基础上，已成功开发出一系列国家专利发明产品，并已广泛应用于板式家具、原木家具、厨卫、汽车等众多领域，以一流的产品质量和精湛的技术服务受到了用户的一致好评。公司不断与国内外多个检测机构交流合作，设计生产、产品质量不断提高，产品在国内外市场均享有盛誉，出口至欧美等发达国家，并与多家国际知名品牌公司建立良好合作关系。为您提供性价比最高的家居五金及无微不至的售前售后服务。

不断为用户提供满意、高质量的产品是我们始终不变的追求。公司将一如既往地以奉行“进取、求实、严谨、团结”的方针。在质量管理过程中严格执行ISO9001质量体系标准，以国家标准为基础，与国际标准接轨，产品已通过SGS、TUV等标准检测。我们不断开拓创新，以技术为核心、视质量为生命、奉用户至上，竭诚为您提供性价比最高的家居五金及无微不至的售前售后服务。

Foshan Tiansi Hardware Co., Ltd. (TINCEE) is a modern intelligent manufacturing high-tech enterprise that integrates research and development, manufacturing, and marketing. Our main products include concealed hinges for cabinets, ball bearing slides, under-mount slides, roller slides, single wall drawers, double wall drawer systems, wardrobe and kitchen storage system, home lightings, etc.

Our factory is located in Shunde, Foshan, Guangdong, one of the core areas of China's furniture hardware manufacturing industry. Adhering to the great goal of providing China's modern home furnishing enterprises with premeium quality hardware products and continuous innovation, TINCEE is the innovator driving the development of China's hardware technology.

The company has strong R&D strength and has obtained more than 30 invention patents and hundreds of practical patents. On the basis of fully introducing and absorbing advanced foreign technology, we have successfully developed a series of national patented invention products, which have been widely used in many fields such as panel furniture, log furniture, kitchen and bathroom cabinets, etc. With first-class product quality and exquisite technical services, we have received comprehensive acclaim from customers. The company continuously cooperates with multiple testing institutions at home and abroad, aiming to improve design, production, and product quality. The products are renowned in both domestic and international markets, exported to developed countries in Europe, North America and Asia. We have established good cooperative relationships with international renowned brands in the home furnishing industry.

Our constant pursuit is to continuously provide customers with satisfactory and high quality products. The company will continue to adhere to the policy of "Progress, Pragmatism, Precision, Partnership". In the quality management process, we strictly adhere to the ISO9001 quality system standards, based on national standards and in line with international standards. Our products have passed the SGS, TUV and other standard inspections. We constantly explore and innovate, with technology as the core, quality as the life, and customers as the top priority. We are dedicated to providing you with the most cost-effective home hardware products and meticulous pre-sales and after-sales services.

天斯 TINCEE

1996

成立中侨并新建工厂
ZhongQiao Hardware
factory was established

1997

粉轨系列开始生产
Powder coated roller
slides production started

1999

滑轨侧板系列投产
建立龙江紫云阁
Single wall drawer slides
production started
We funded the construction
of Ziyun Temple

2000

开始成立外销部
主打国外市场
The Export Department was
established

2002

生产铰链
Hinge production started

2003

建立新厂区
筹建龙江医院
We bulit a new factory.
We funded the construction
of Longjiang Hospital.

2004

兴建员工公寓大楼
The staff apartment was
built.

2005

生产第一个缓冲铰链的
中国工厂
We became the first soft-
closing hinge manufacturer
in China.

2006

投入钢珠滑轨生产线
Ball bearing slides
production started.

2010

通过ISO 9001:2015
质量管理体系认证
通过GB/T 19001-2016
质量管理体系认证
ISO 9001:2015 certified
GB/T 19001-2016 certified

2012

铰链导轨
行业标准起草单位
The drafting organization of
the hinges and drawer slides
industry standards.

2015

更名为
天斯五金有限公司
The factory was renamed
into Foshan Tiansi Hardware
Co., Ltd.

2016

铰链世界发明专利
TINCEE 3-way hinges have
secured invention patents
worldwide.

2018

滑轨世界发明专利
TINCEE unique ball bearing
slides have secured invention
patents worldwide.

2022

成立佛山市天斯创品五金
科技有限公司，主打国内市场
The subsidiary Foshan TINCEE
Chuangpin Hardware Technology
Co., Ltd. was established, to target
the domestic market.

2024

天斯推出新品牌TINCEE
天斯总部展厅落成
International new brand
name TINCEE was launched





天斯总部创新展示中心 TINCEE HEADQUARTERS EXHIBITION CENTER

天斯总部创新展示中心，集展示、体验、交流、培训于一体，连通天斯测试中心，为家居企业、家装公司以及地产商，提供高品质且极致性价比的五金产品。

TINCEE headquarters exhibition center integrates exhibition, experience, communication, training, and connects with the TINCEE testing center, welcoming customers from different industries such as home furnishing and decoration companies, furniturer manufacturers, cabinet makers, retailers, and real estate developers from all over the world.

企业荣誉
ENTERPRISE HONOR

作为世界铰链滑轨革新者，天斯铰链滑轨拥有世界发明专利30项、实用型专利200多项，铰链滑轨行业标准起草单位，AEO认证海关免检企业，ODM国际顶尖五金品牌30年，是中国最大的家居五金生产商之一。

With 30+ invention patents worldwide and 200+ utility patents in cabinet hinges and drawer slides, TINCEE is the main drafter of national standards for hinges and slides, we are an AEO-certified enterprise free from customs inspections, making it one of the largest home hardware manufacturers in China.



30+世界铰链滑轨发明专利
30+ Global Patents for Hinges and Slides



国家高新技术企业
National High-tech Enterprise



AEO海关高级认证企业
Advanced AEO Certified Enterprise by Customs



广东省知识产权示范企业
Provincial Intellectual Property Benchmark Enterprise



细分行业龙头企业
Leading Enterprise in furniture hardware industry



广东省名优高新技术产品
Guangdong Provincial Famous and High-tech Products



中国五金制品出口基地企业
Key Enterprise of China Hardware Products Export center



佛山市制造业隐形冠军企业
A hidden Champion Enterprise of Foshan



佛山标准产品企业
A certified Enterprise of FOSHAN STANDARD



铰链行业标准主起草单位
Main Drafter of Hinge Industry Standards





导轨行业标准主起草单位
Main Drafter of Drawer Slide Industry Standards



ISO9001质量管理体系认证
ISO 9001/14001 Certified company



全球发明专利，获知识产权专利保护，产品质量满足国际测试标准
Global patented products with intellectual property rights, meeting or exceeding the international quality testing standards.

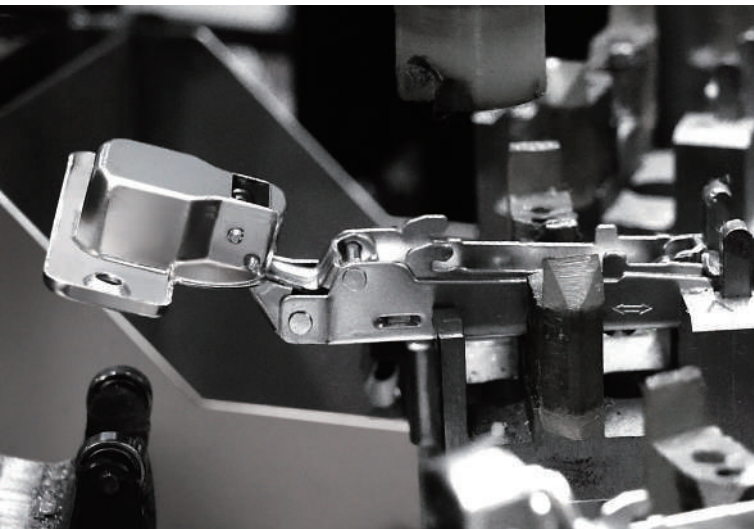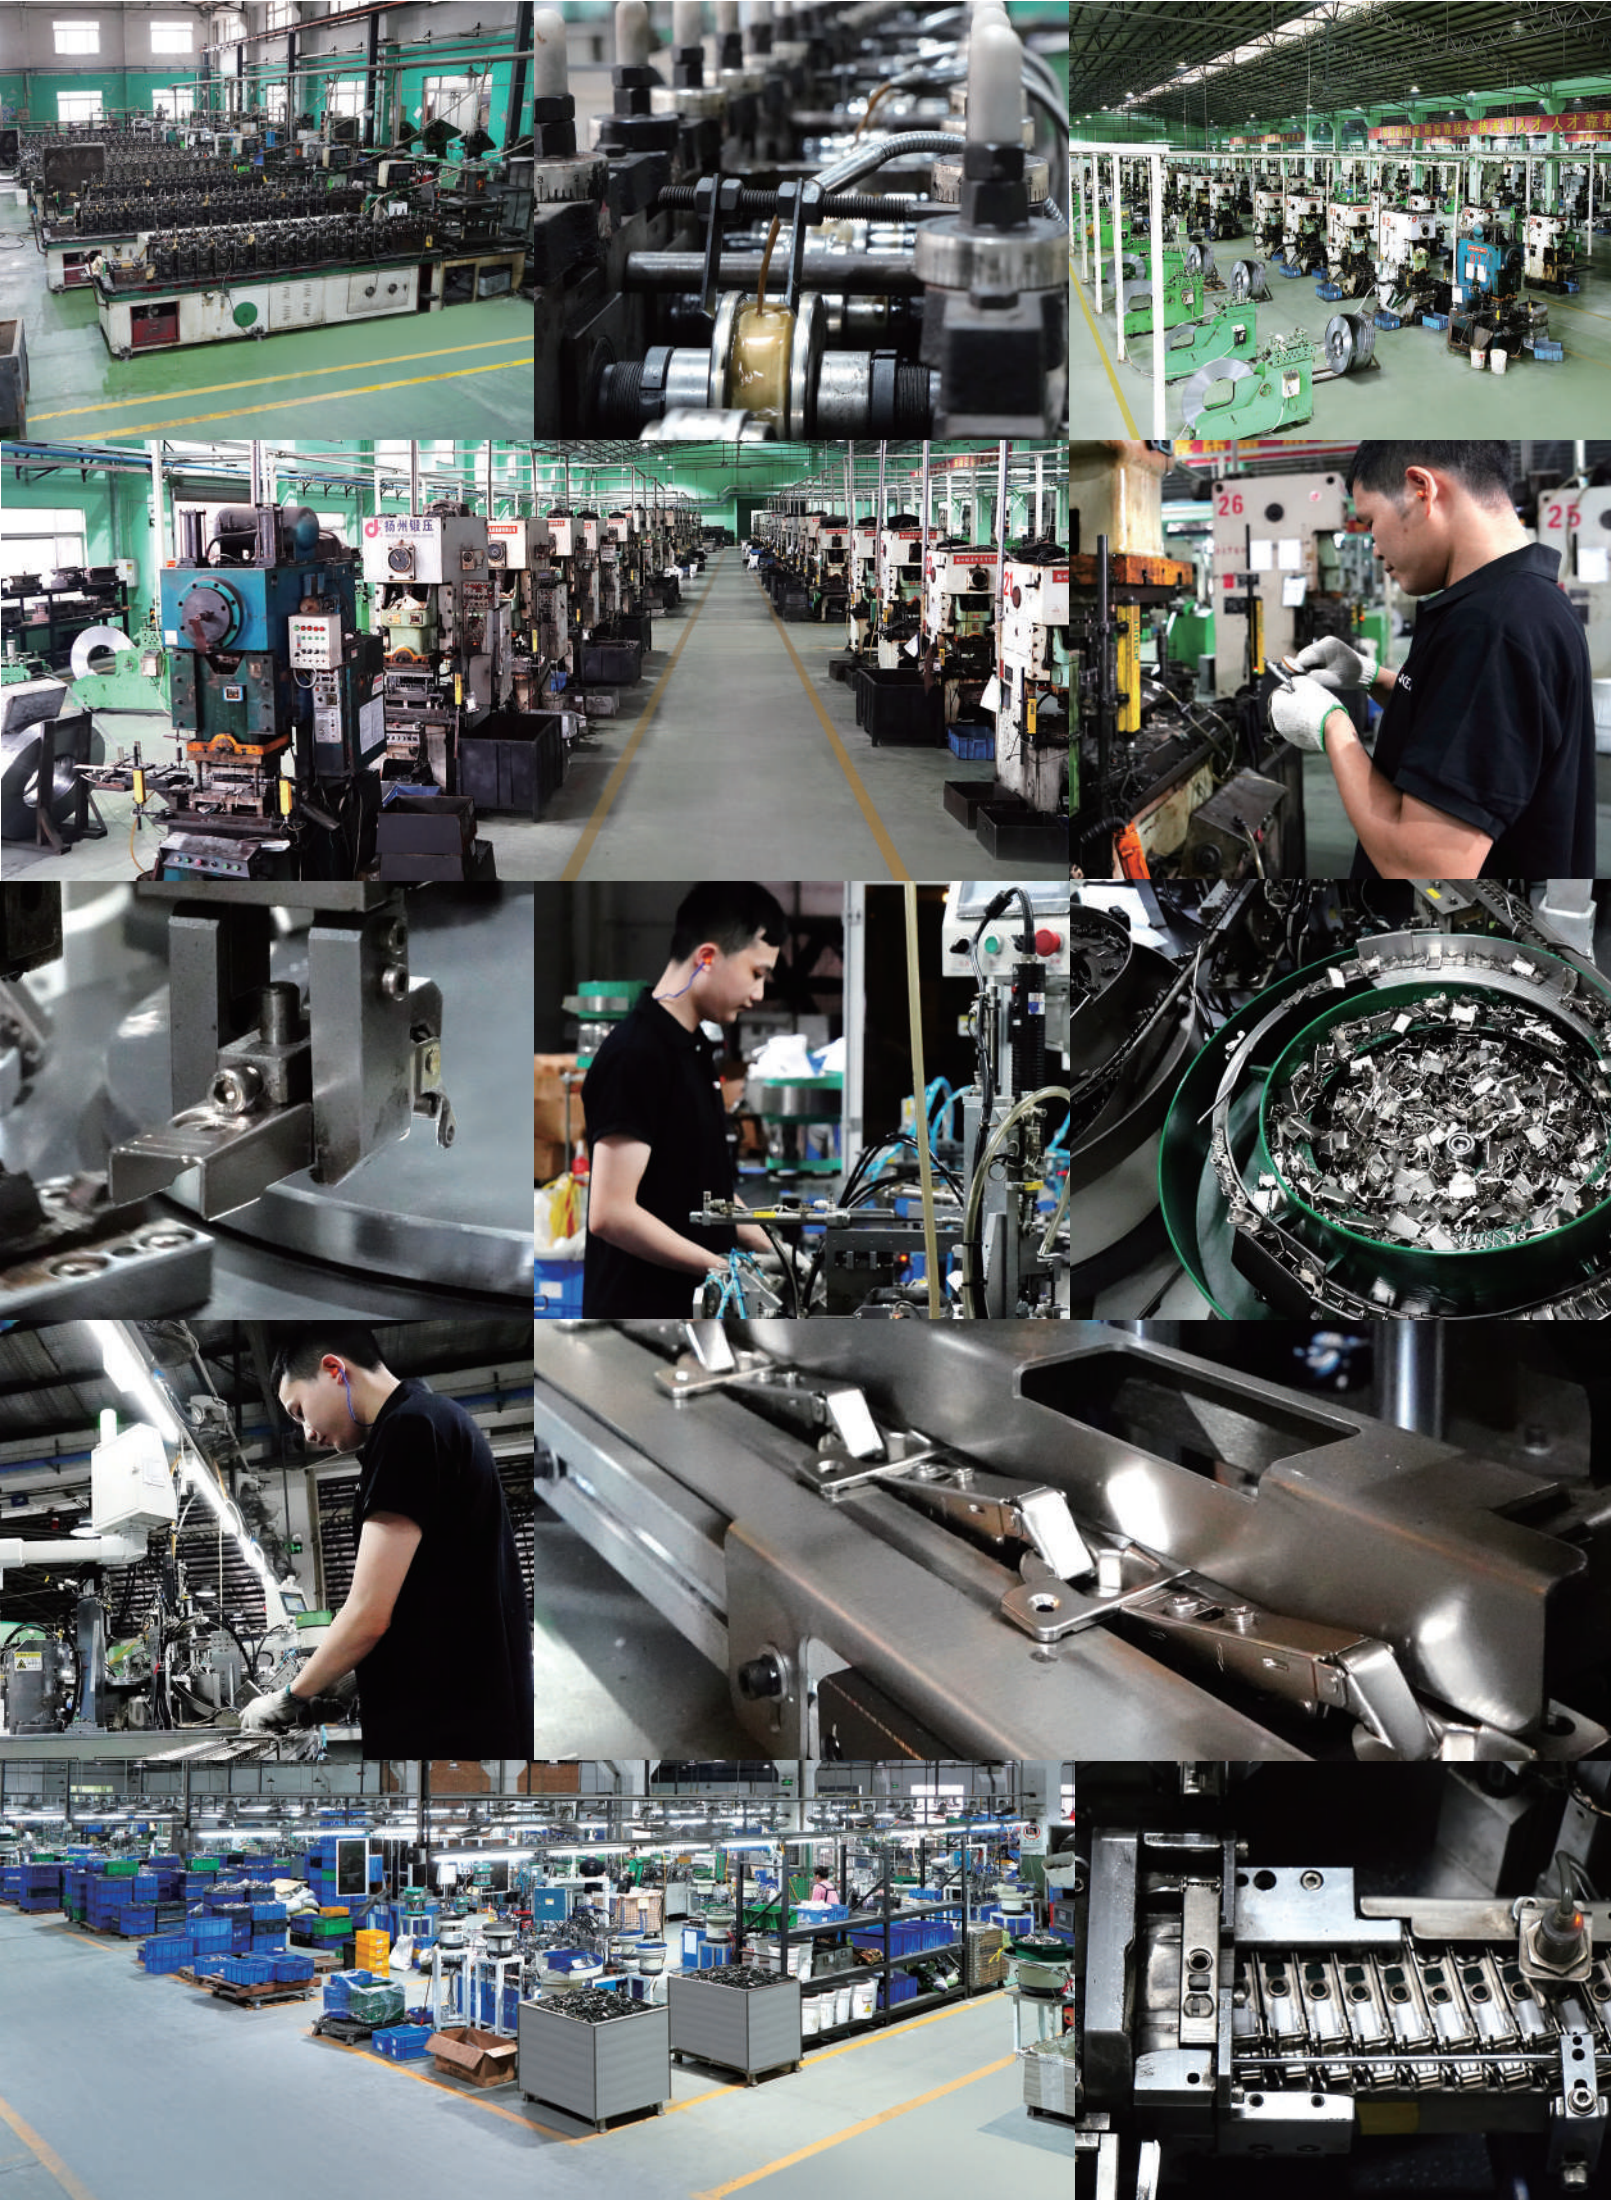

智能化生产

INTELLIGENT MANUFACTURING

作为一家现代化的智能制造企业，天斯五金在国内率先实现了产品的标准化，并以此构建了一个强大的自动化生产体系，强大的智能制造体系实现最优的生产效率与资源利用，能够有效满足客户交期、品质、性价比的三大需求。

As a modern intelligent manufacturing enterprise, TINCEE was the first to achieve product standardization, thus establishing a powerful automated production system. The powerful intelligent manufacturing system enables optimal production efficiency and resource utilization, effectively fulfilling customers' three major needs: lead time, quality, and cost-effectiveness.

天斯 TINCEE

天斯 TINCEE

三段力缓冲铰链开创者


TINCEE, THE PIONEER OF THE THREE-WAY SOFT CLOSE HINGE

全球发明专利

铰链导轨行业标准主起草单位
定义铰链滑轨行业标准
引领行业稳固发展

Global invention patents

The main drafting unit of the national standard for hinge and slides
Defining industry standard for hinge and drawer slides
Leading the stable development of the industry

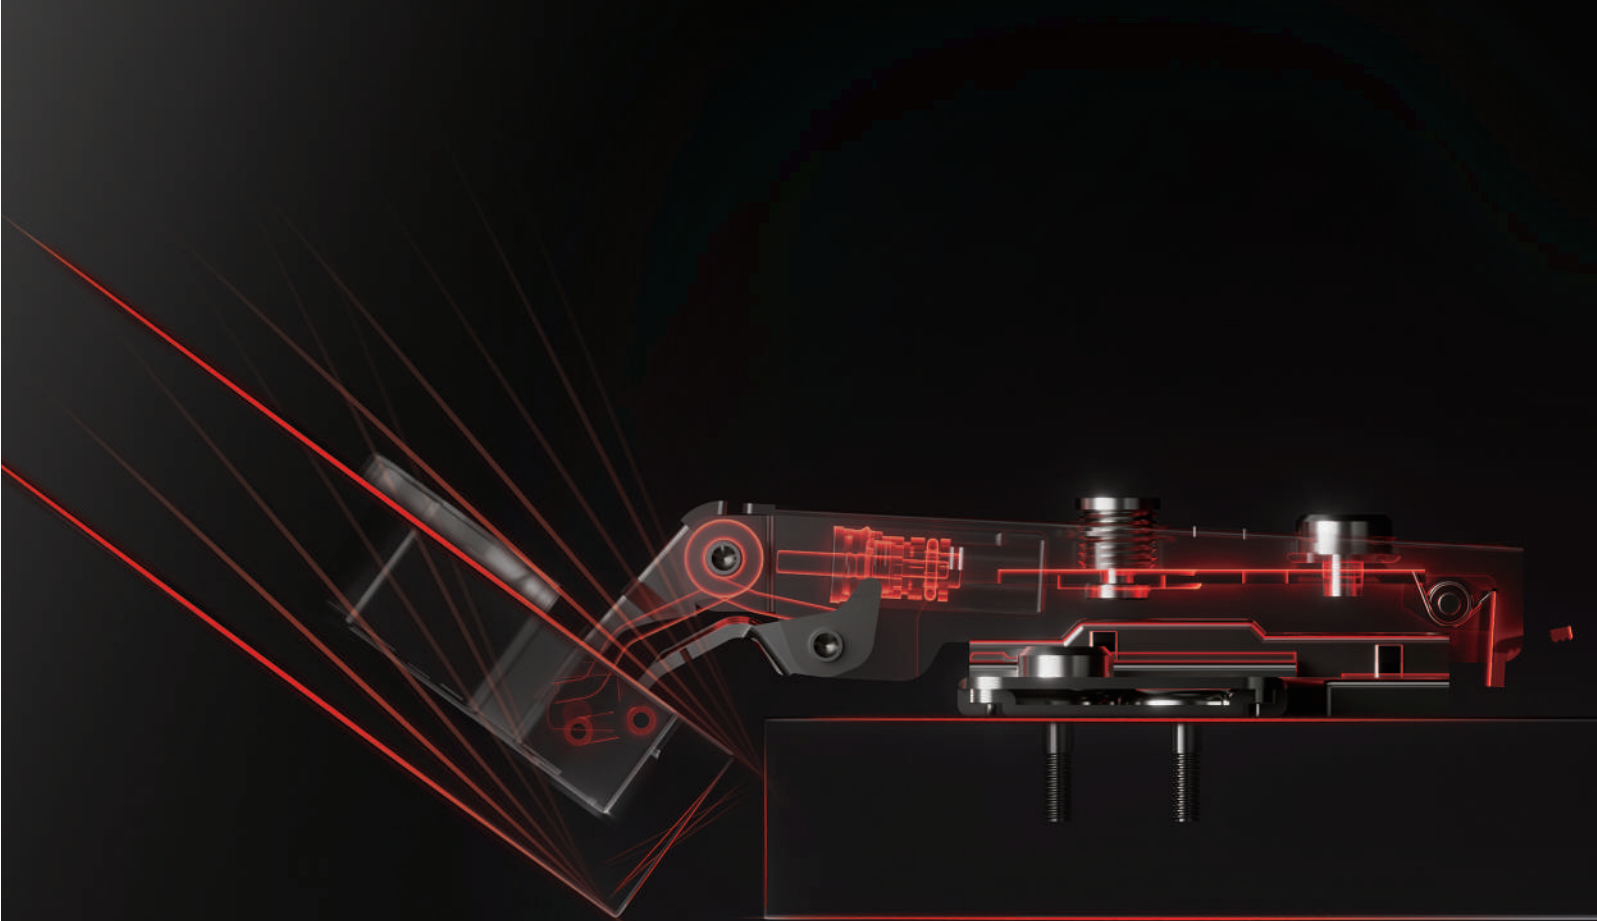

天斯 TINCEE

跑车式阻尼滑轨开创者

TINCEE, THE PIONEER OF THE SPORTS CAR-STYLE SOFT CLOSE BALL BEARING SLIDE

专利阻尼技术

跑车级刹车系统

即使推力过大，也能快速缓冲
保持静音平稳关闭

Patented damping technology, sports car-style braking system

Even if you slam the drawer, it can quickly buffered to maintain
silence and achieve smooth closure.



Product Index

产品索引

铰链系列 HINGE SERIES

■ 厚门铰链系列 THICK DOOR HINGE SERIES

PAGE 001-022

HA19厚门铰链系列 HA19 THICK DOOR HINGE SERIES



HA19
T9集成阻尼可调铰链

PAGE 005



HA19
T8卡式一字底三维三段力缓冲铰链

PAGE 007



HA19
T8卡式十字底三维上下调节三段力缓冲铰链

PAGE 009



HA19
T8卡式三维三段力缓冲铰链

PAGE 011



HA19
T8卡式二维三段力缓冲铰链

PAGE 013



HA04
T8卡式三段力缓冲铰链

PAGE 015

HA39厚门固装铰链系列 HA39 FIXED MOUNTING PLATE HINGE SERIES



HA39
T2固装三段力缓冲铰链

PAGE 019

HA35厚门固装铰链系列 HA35 FIXED MOUNTING PLATE HINGE SERIES



HA35
T1系列一字灵动铰链 (厚门)

PAGE 021

铰链系列 HINGE SERIES

■ 厚门铰链系列 THICK DOOR HINGE SERIES

PAGE 023-052

A5厚门铰链系列 A5 THICK DOOR HINGE SERIES



A51
固装一字底三段力缓冲铰链(塑料臂盖)

PAGE 025



A51
固装一字底三段力缓冲铰链(铁臂盖)

PAGE 027



A55
固装三段力缓冲铰链

PAGE 029



A55
固装三段力缓冲铰链

PAGE 031

HA厚门铝框铰链系列 HA THICK DOOR ALUMINUM FRAME HINGE SERIES



HA08
卡式一字底三维铝框三段力缓冲铰链

PAGE 035



HA08
卡式三维铝框三段力缓冲铰链

PAGE 037



HA08
卡式二维铝框三段力缓冲铰链

PAGE 039



HA11
卡式铝框三段力缓冲铰链

PAGE 041



HA38
固装铝框三段力缓冲铰链

PAGE 043

HA厚门特殊角度铰链系列 HA THICK DOOR SPECIAL ANGLE HINGE SERIES



HA12
卡式三维三段力缓冲角度铰链

PAGE 047



HA12
卡式二维三段力缓冲角度铰链

PAGE 049



HA13
卡式三段力缓冲角度铰链

PAGE 051

Product Index

产品索引

铰链系列 HINGE SERIES

AJ19铰链系列 AJ19 HINGE SERIES



AJ19
卡式一字底三维三段力缓冲铰链



AJ19
卡式三维三段力缓冲铰链




AJ19
卡式二维三段力缓冲铰链



AJ04
卡式三段力缓冲铰链

SA不锈钢铰链系列 SA STAINLESS STEEL HINGE SERIES

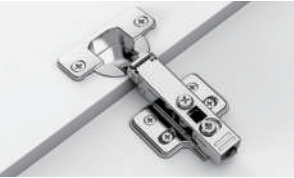

SA19
卡式二维三段力缓冲不锈钢铰链



SA04
卡式三段力缓冲不锈钢铰链



SA39
固装三段力缓冲不锈钢铰链

A35固装铰链系列 A35 FIXED MOUNTING PLATE HINGE SERIES



A35
T1系列一字灵动铰链(薄门款)

AJ39固装铰链系列 AJ39 FIXED MOUNTING PLATE HINGE SERIES



AJ39
固装三段力缓冲铰链

铰链系列 HINGE SERIES

AJ08铝框铰链系列 AJ08 ALUMINUM FRAME HINGE SERIES




AJ08
卡式一字底三维铝框三段力缓冲铰链



AJ08
卡式三维铝框三段力缓冲铰链



AJ08
卡式二维铝框三段力缓冲铰链

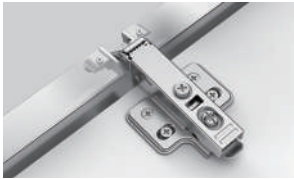

AJ11
卡式铝框三段力缓冲铰链



AJ38
固装铝框三段力缓冲铰链

卡式三维特殊角度铰链系列 CLIP-ON SPECIAL ANGLE HINGE SERIES (3D)



AJ12
卡式三维三段力缓冲角度铰链



AJ13
卡式三段力缓冲角度铰链



T1304
卡式角度铰链

155度二段力缓冲铰链系列 TWO WAY 155° SOFT CLOSE HINGE SERIES



A29
155° 卡式三维二段力缓冲铰链



A31
155° 滑入式二段力缓冲铰链

125度二段力缓冲铰链系列 Two way 125° sofe close hinges series



A26
125° 度二段力缓冲铰链系列

Product Index

产品索引

铰链系列 HINGE SERIES

■ 铰链系列 HINGE SERIES

PAGE 053-122

铰链系列 HINGE SERIES



A25
40杯三维厚门一段力缓冲铰链

PAGE 107



A071
卡式迷你一段力缓冲铰链

PAGE 109



A0721
卡式玻璃一段力缓冲铰链

PAGE 111



A1813
滑入式短臂一段力缓冲角度铰链

PAGE 113



T043
卡式反弹铰链

PAGE 115



LT080
卡式二维铝框无力铰链

PAGE 117



A1990
卡式二维浅杯二段力缓冲铰链

PAGE 119



TJ19
TJ反弹铰链

PAGE 121

■ 配件系列 HINGE SERIES


PAGE 123-130

配件系列 HINGE SERIES



C22H01
底座

PAGE 125



C21H01
底座

PAGE 125




C20H01
底座

PAGE 125



C02H05
底座

PAGE 125



C51H01
底座

PAGE 125



C52H01
底座

PAGE 125



C58H01
底座

PAGE 126



C56H05
底座

PAGE 126



C57H05
底座

PAGE 126



C56H0
底座

PAGE 126



C02H0
底座

PAGE 126



SC02H05
底座


PAGE 126

铰链系列 HINGE SERIES

■ 配件系列 HINGE SERIES

PAGE 129-136

配件系列 HINGE SERIES



C55H0S
底座

PAGE 127



C50H0S
底座

PAGE 127



C05H0S
底座

PAGE 127



C55H0
底座

PAGE 127



SC05H0S
底座

PAGE 127



A03H0S
底座

PAGE 127



A03H0
底座

PAGE 128



A18H0D
底座

PAGE 128



P2B2
光铬玻璃铰链方盖

PAGE 128



P2B3
银色玻璃铰链方盖

PAGE 128



P2C2
光铬玻璃铰链圆盖

PAGE 128



P2C3
银色玻璃铰链圆盖

PAGE 128



P2C4
黑色玻璃铰链圆盖

PAGE 128



/配自攻螺丝
铰杯

PAGE 128



D配欧洲螺丝
铰杯

PAGE 128



N配M8胶粒
铰杯

PAGE 128



M配M10胶粒
铰杯

PAGE 128



E配快装螺丝
铰杯

PAGE 128



C03
铰链臂盖

PAGE 129



A191
铰链臂盖(中弯、大弯)

PAGE 129



A196
铰链臂盖(直臂)

PAGE 129



K2
Ø5 双桥胶粒

PAGE 129



K6
Ø10 双桥胶粒

PAGE 129



E10
快装胶粒

PAGE 130

Product Index

产品索引

铰链系列 HINGE SERIES

配件系列 ACCESSROY SERIES

PAGE 129-136

配件系列 ACCESSROY SERIES



N8
胶粒(底座专用)

PAGE 130



N8
方耳胶粒(主体专用)

PAGE 130



M10
胶粒

PAGE 130



D1/2/3/4/5
欧洲螺丝

PAGE 130



V1/2/3/4
沉头螺丝

PAGE 130

反弹器系列 BUMPER SERIES

反弹器系列 BUMPER SERIES

PAGE 131-148

反弹器系列 BUMPER SERIES



T002
柜门反弹器系列

PAGE 135



T001
柜门反弹器系列

PAGE 139



T003
明装卡扣式反弹器

PAGE 143



T004
暗装卡扣式反弹器

PAGE 147

铰链系列 HINGE SERIES

针式铰链系列 ALUMINUM FRAME HINGE SERIES

PAGE 149-154

针式铰链系列 ALUMINUM FRAME HINGE SERIES



TWB25
25针式铰链

PAGE 151



TWB35
35针式铰链

PAGE 153

天地铰链系列 CONCEALED HINGE SERIES

PAGE 155-164

天地铰链系列 CONCEALED HINGE SERIES



TWC25
轻型天地铰链

PAGE 157



TWC35
重型天地铰链

PAGE 161

Product Index

产品索引

滑轨系列 SLIDE SERIES

侧装滑轨系列 SIDE MOUNTED BALL BEARING SLIDE SERIES

PAGE 165-178

侧装滑轨系列 SIDE MOUNTED BALL BEARING SLIDE SERIES



4531FS
三节阻尼反弹钢珠滑轨



45C31S
三节阻尼钢珠滑轨



45C31
三节钢珠滑轨

隐藏托底轨系列 UNDER MOUNTED SLIDE SERIES

PAGE 179-196

隐藏托底轨系列 UNDER MOUNTED SLIDE SERIES



YH305
三节同步阻尼隐藏滑轨-5D调节
(带安装把手)



YH304
三节同步阻尼隐藏滑轨-3D调节
(带安装把手)



YT305
三节同步反弹隐藏滑轨-3D调节
(带安装把手)



YH303
美式三节同步阻尼隐藏滑轨-3D调节
(带安装把手)



HH203
7/8两节隐藏式缓冲滑轨(带调节螺丝)



HH203
两节隐藏式缓冲滑轨(带调节螺丝)

骑马抽系列 DOUBLE WALL SLIDE SERIES

骑马抽系列 DOUBLE WALL DRAWER SERIES

PAGE 197-226

豪华超薄阻尼骑马抽匣 DELUXE ULTRA-SLIM DAMPED RIDING DRAWER



T66
超薄骑马抽匣系列




T149
超薄骑马抽匣系列




T181
超薄骑马抽匣系列

豪华魔力灯光阻尼骑马抽匣 DELUXE MAGIC LIGHT SOFT CLOSE DOUBLE WALL DRAWER

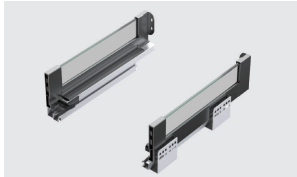

D63
魔力灯光低帮骑马抽匣系列

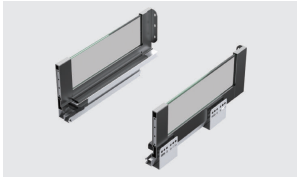

D101
魔力灯光中帮骑马抽匣系列



D148
魔力灯光高帮骑马抽匣系列

豪华方形骑马抽匣 DELUXE SQUARE DOUBLE WALL DRAWER



S66
方形骑马抽匣系列



S140
方形骑马抽匣系列




S180
方形骑马抽匣系列

骑马抽内抽系列 INTERNAL DOUBLE WALL DRAWER SERIES

PAGE 227-240


薄侧帮内抽 INTERNAL DOUBLE WALL DRAWER SERIES

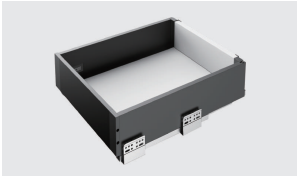

TN86
薄侧帮低内抽系列



DN150
薄侧帮高内抽(玻璃)系列

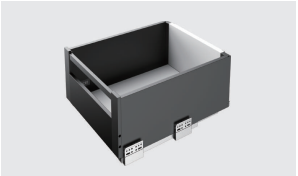

N150
薄侧帮高内抽(粗杆)系列

Product Index

产品索引

厨房收纳系统 KITCHEN STORAGE SYSTEM

厨房收纳系统 KITCHEN STORAGE SYSTEM

PAGE 241-256

厨房收纳系统 KITCHEN STORAGE SYSTEM



SC-QC-800A01
800柜 经典刀叉铝合金收纳抽屉



SC-QC-900A01
900柜 经典刀叉铝合金收纳抽屉



SC-QC-800B01
800柜 经典碗碟铝合金收纳抽屉



SC-QC-900B01
900柜 经典碗碟铝合金收纳抽屉



SC-QC-800C01
800柜 经典锅具铝合金收纳抽屉



SC-QC-900C01
900柜 经典锅具铝合金收纳抽屉

衣柜收纳系统 WARDROBE STORAGE SYSTEM

衣柜收纳系统 WARDROBE STORAGE SYSTEM

PAGE 257-272

衣柜收纳系统 WARDROBE STORAGE SYSTEM



SC-EYI-06
腰带收纳篮



SC-EYI-02
裤挂架



SC-EYI-04
衣物篮



SC-EYI-05
多功能首饰盒



SC-EYI-10
护肤抽屉收纳



SC-EYI-08
内衣抽屉收纳篮

天斯 TINCEE

THICK DOOR HINGE SERIES

厚门板铰链系列

在生活中针对厚门、大门的固定安装普遍是通过增加铰链数量来进行门板的固定，这种安装方式美观缺失，破坏了房屋整体美感。而天斯厚门板系列铰链开门角度接近全开合的100°，同时拥有独家专利三段力缓冲铰链技术，内置专利结构阻尼装置，在开关闭合的时候产生三段缓冲作用，有效分散力量，从而减少门板对铰链的冲击，使开门力更轻，闭合手感更好，有效降低铰链承受压力，因此在减少铰链安装的同时也能保证其稳定性、耐用性和实用性。

In real life, we typically add more hinges to accommodate the installation of thicker and larger cabinet doors. However, this approach may damage the furniture and compromise the aesthetic appeal of the home.

TINCEE developed the 3-way soft close thick door hinge series to address these challenges. Our heavy-duty doors achieve an opening angle of nearly 100 degrees. By employing TINCEE's proprietary patented 3-way soft close technology, these hinges effectively absorb forces from heavier doors, significantly reducing impact forces transmitted to the hinge structure. This innovative design enables fewer hinges to be required for installing heavy doors.





T9/T8 THICK DOOR HINGE SERIES

T9/T8 厚门铰链系列

Patented structural damping device 发明专利结构阻尼装置

拥有发明专利结构的阻尼装置，可通过80000次开合测试，创新三段力缓冲，柜门开启免回弹，开合体验更轻柔、更静谧。

Our patented damping mechanism has successfully passed 80,000 open-close cycle tests. As an innovative three-way soft-close hinge, it prevents cabinet doors from rebounding when opened, ensuring smooth and silent operation.



T9集成阻尼可调铰链 T9 Speed adjustable soft-close hinge (3D)



HAT19

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5		0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels


L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

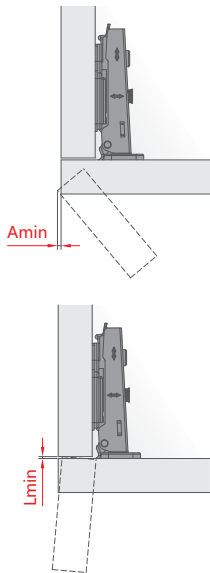


相关信息 Relevant Information




铰杯尺寸 Hinge Cup Dimensions

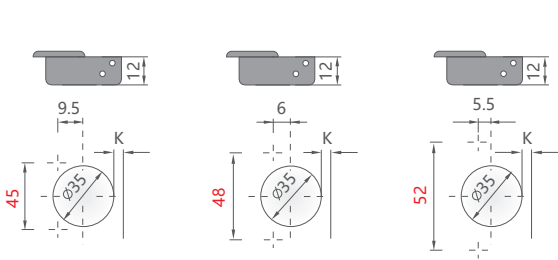

T9集成阻尼可调铰链 T9 Speed adjustable soft-close hinge (3D)

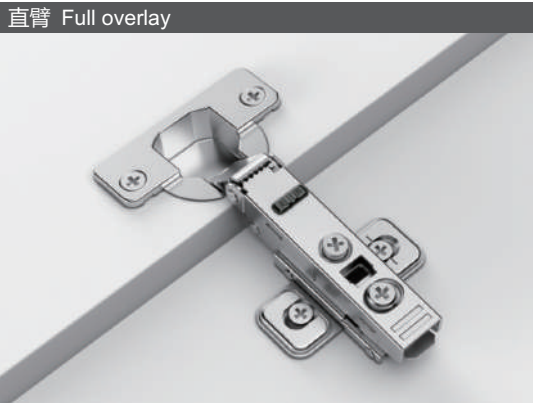


- 镍色 HAT1926+C22H0I
- 黑钛色 HAT1926+C22H0I(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

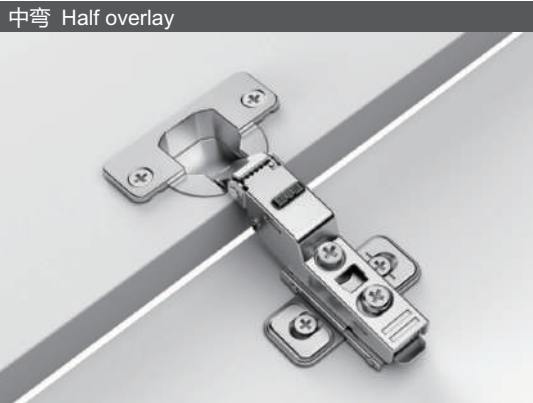


- 镍色 HAT1923+C22H0I
- 黑钛色 HAT1923+C22H0I(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

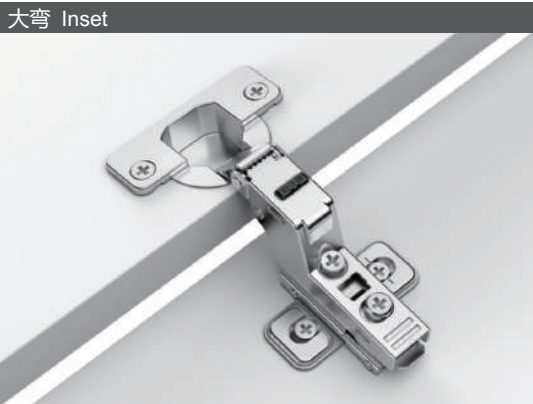


- 镍色 HAT1921+C22H0I
- 黑钛色 HAT1921+C22H0I(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

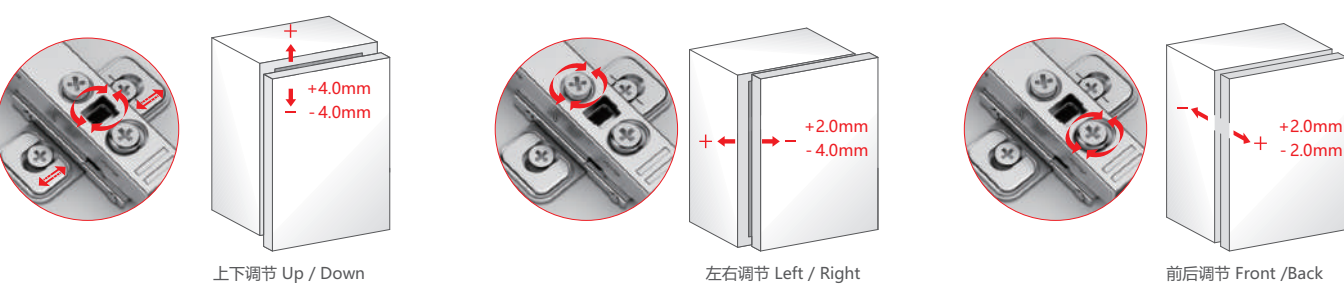

T8卡式一字底三维三段力缓冲铰链 T8 Three way clip-on soft closing hinge with linear plate (3D)



HA19

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5		0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

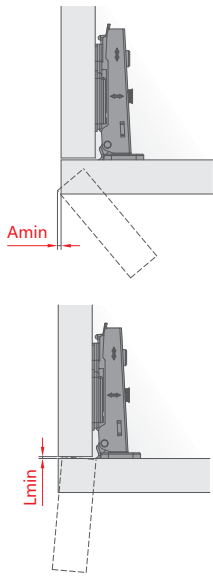

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C02H0S、C02H0、C21H0I、C20H0I、C22H0I	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

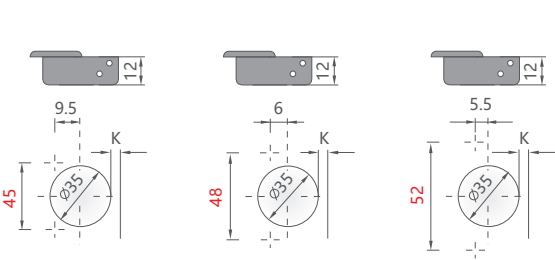

T8卡式一字底三维三段力缓冲铰链 T8 Three way clip-on soft closing hinge with linear plate (3D)




- 镍色 HA1926+C21H0I
- 黑钛色 HA1926+C21H0I(TG)



C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		


- 镍色 HA1923+C21H0I
- 黑钛色 HA1923+C21H0I(TG)



C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

- 镍色 HA1921+C21H0I
- 黑钛色 HA1921+C21H0I(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

T8卡式十字底三维上下调节三段力缓冲铰链 T8 Three way soft close hinge with cam, clip-on cross mounting plate



HA19

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5		0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

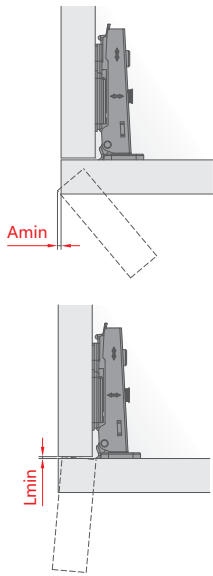

相关信息 Relevant Information


铰杯尺寸 Hinge Cup Dimensions

C03
铰杯装饰盖
Hinge Cup Cover cap


A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap


适配底座 Corresponding mounting plate	螺丝 Screw
C21H01、C20H01、C02H0S、C02H0、C22H01	130页 PAGE

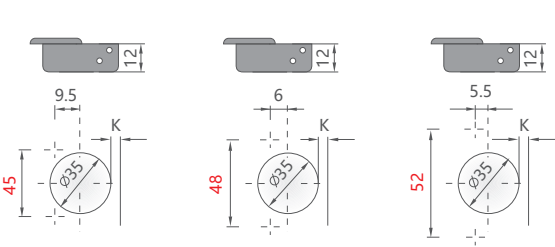

T8卡式十字底三维上下调节三段力缓冲铰链 T8 Three way soft close hinge with cam, clip-on cross mounting plate

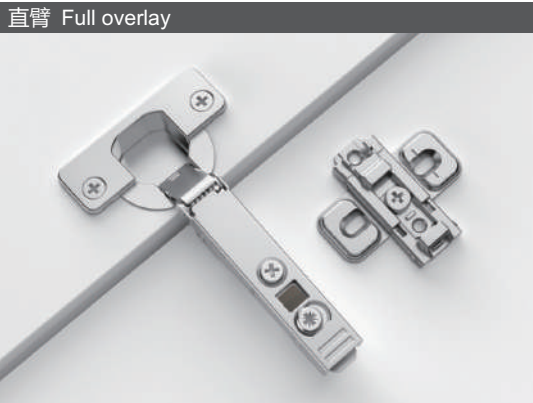


- 镍色 HA1926+C22H01
- 黑钛色 HA1926+C22H01(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17

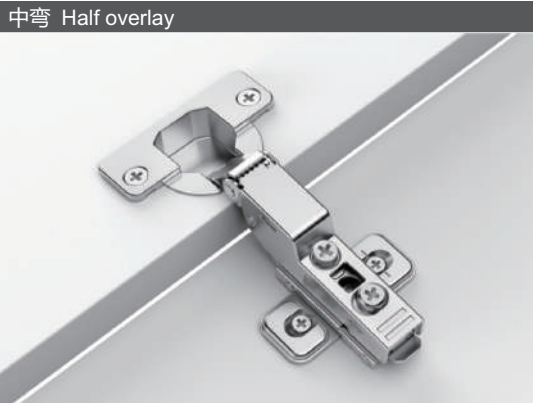


- 镍色 HA1923+C22H01
- 黑钛色 HA1923+C22H01(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8

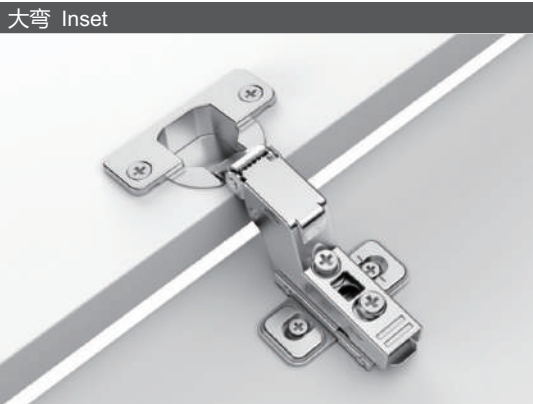

- 镍色 HA1921+C22H01
- 黑钛色 HA1921+C22H01(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

T8卡式三维三段力缓冲铰链 T8 Three way clip-on soft close hinge (3D)



HA19

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5		0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

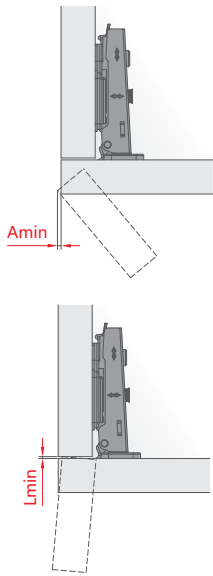

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap


A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H01、C20H01、C02H05、C02H0、C22H01	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

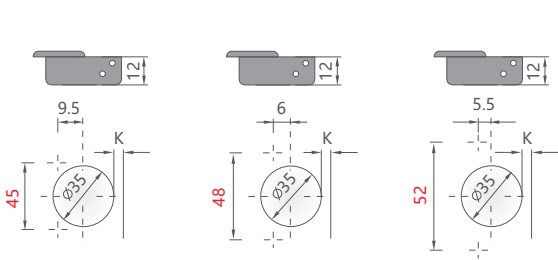

T8卡式三维三段力缓冲铰链 T8 Three way clip-on soft close hinge (3D)

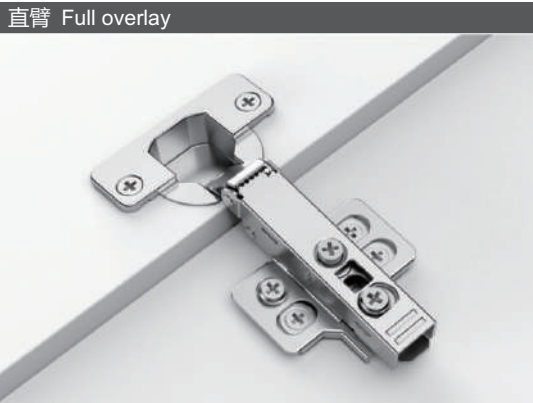


- 镍色 HA1926+C20H01
- 黑钛色 HA1926+C20H01(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

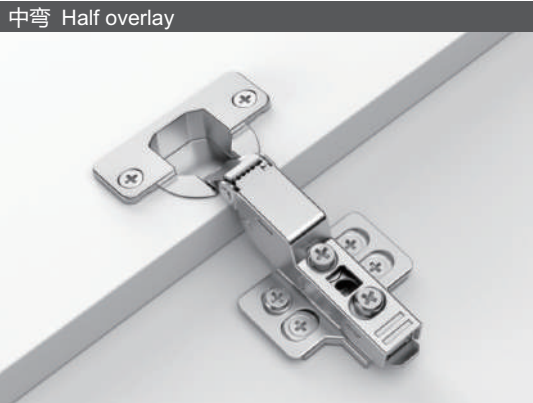


- 镍色 HA1923+C20H01
- 黑钛色 HA1923+C20H01(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

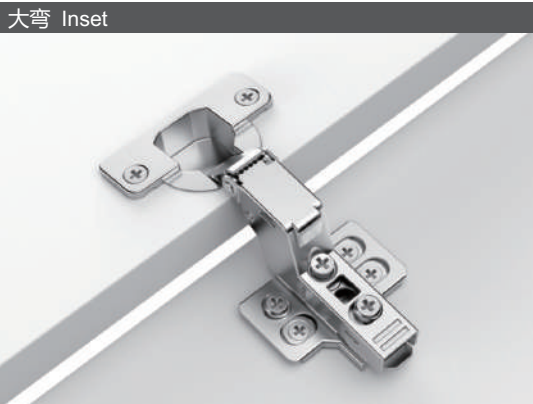

- 镍色 HA1921+C20H01
- 黑钛色 HA1921+C20H01(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

T8卡式二维三段力缓冲铰链 T8 Three way clip-on soft close hinge (2D)



HA19

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5		0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

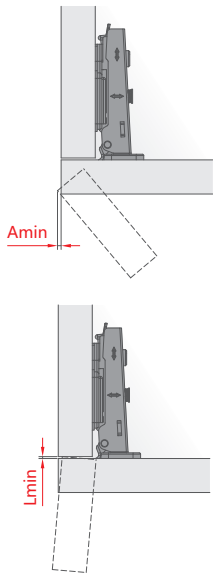

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H01、C20H01、C02H0S、C02H0、C22H01	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

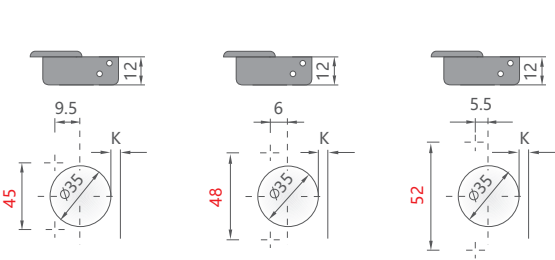

T8卡式二维三段力缓冲铰链 T8 Three way clip-on soft close hinge (2D)

直臂 Full overlay

■ 镍色 HA1926+C02H0S

■ 黑钛色 HA1926+C02H0S(TG)

C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

■ 镍色 HA1923+C02H0S

■ 黑钛色 HA1923+C02H0S(TG)

C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

大弯 Inset

■ 镍色 HA1921+C02H0S

■ 黑钛色 HA1921+C02H0S(TG)

C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

T8卡式三段力缓冲铰链 T8 Three way clip-on soft close hinge



HA04

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

$\frac{A(\min)}{K}$ T	15	16	17	18	19	20	21	22	23	24	25
3	0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4	0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5	0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6	0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7	0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

$\frac{L(\min)}{K}$ T	15	16	17	18	19	20	21	22	23	24	25
3	1	1	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1	1	1
5	1	1	1	1	1	1	1	1	1	1	1
6	1	1	1	1	1	1	1	1	1	1	1
7	1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

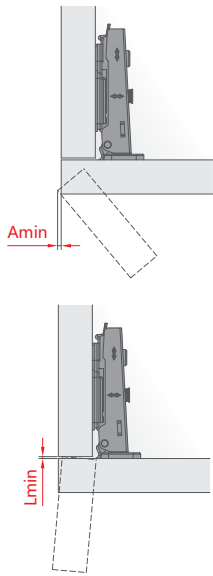

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C20H0I、C02H0S、C02H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

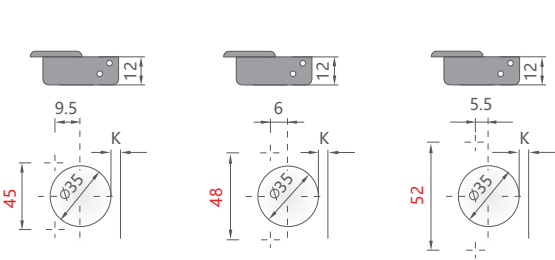

T8卡式三段力缓冲铰链 T8 Three way clip-on soft close hinge

直臂 Full overlay

- 镍色 HA0426+C02H0S
- 黑钛色 HA0426+C02H0S(TG)

C=0 H=14+K-D

$\frac{D}{H}$ K	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

中弯 Half overlay

- 镍色 HA0423+C02H0S
- 黑钛色 HA0423+C02H0S(TG)

C=9 H=5+K-D

$\frac{D}{H}$ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8


大弯 Inset

- 镍色 HA0421+C02H0S
- 黑钛色 HA0421+C02H0S(TG)

C=18 H=-4+K+A

$\frac{A}{H}$ K	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

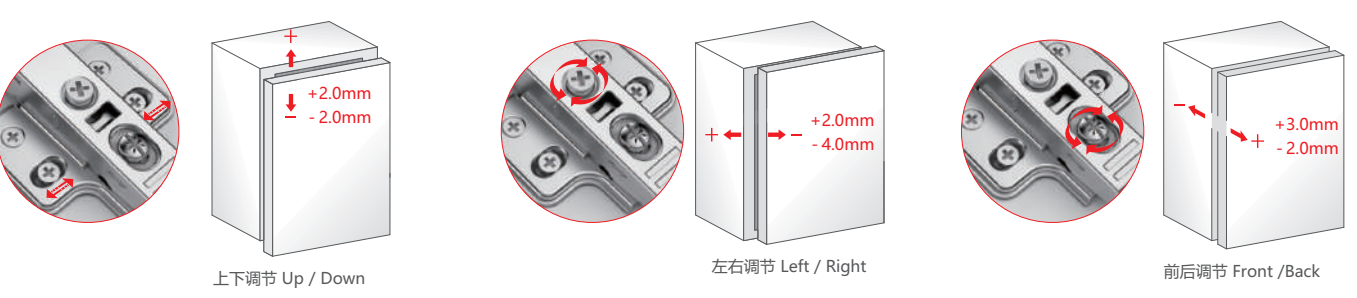



T2 THICK DOOR FIXED MOUNTING PLATE HINGE SERIES

T2厚门固装铰链系列

Innovative Three-way Technology, Rebound-Free Opening 创新三段力，开启免回弹

T2系列铰链作为原创三段力缓冲铰链，厚薄门通用，小角度缓冲，无需测量，顶板安装。The T2 series cabinet hinge, featuring our original three-way soft-close hinge buffering technology, is versatile enough for both thick and thin doors. It offers small-angle buffering, eliminates the need for measurement, and allows for convenient top panel installation.



T2固装三段力缓冲铰链 T2 Three way fixed mounting plate soft close hinge



HA39

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5		0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

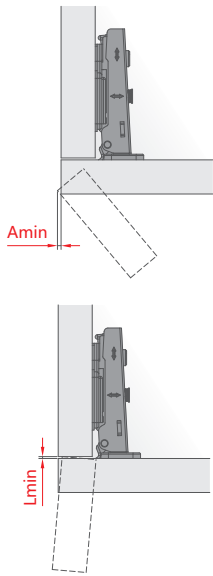

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C05H0S、A03H0S、A03H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

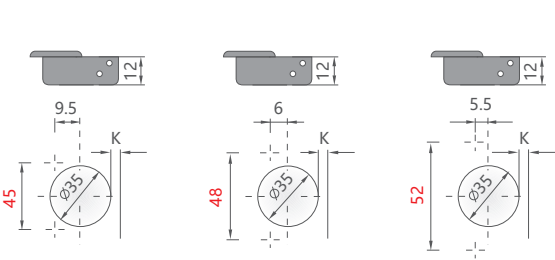

T2固装三段力缓冲铰链 T2 Three way fixed mounting plate soft close hinge




- 镍色 HA3926+C05H0S
- 黑钛色 HA3926+C05H0S(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

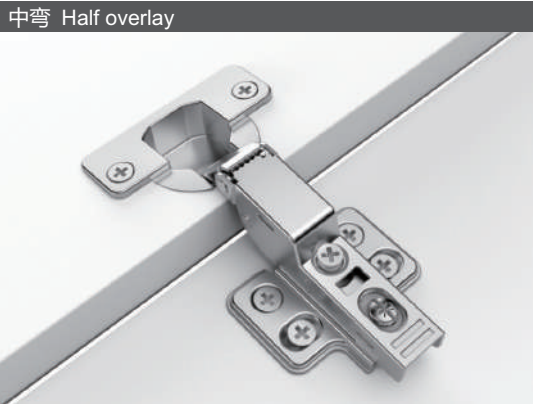


- 镍色 HA3923+C05H0S
- 黑钛色 HA3923+C05H0S(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

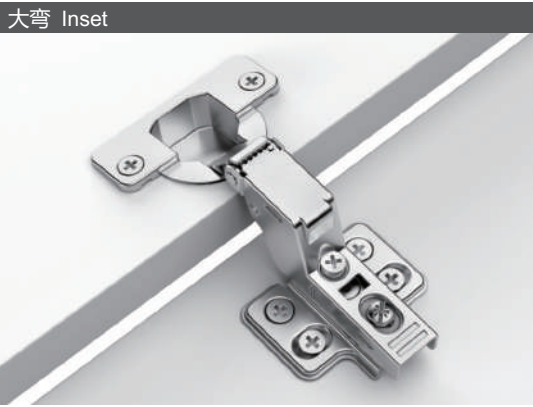

- 镍色 HA3921+C05H0S
- 黑钛色 HA3921+C05H0S(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

T1系列一字灵动铰链（厚门） T1 fix mounting linear plate soft close hinges



HA35

产品介绍 Product Introduction


- 开启角度：98°
- 开孔尺寸：35mm
- 铰杯深度：12mm
- 铰杯孔距：45/9.5、48/6、52/5.5
- 开孔距离：3-7mm
- 适用门板：15-25mm
- 盐雾测试：48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
4		0	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
5		0	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
6		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
7		0	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

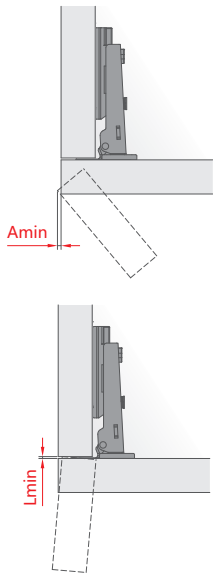

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C35H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

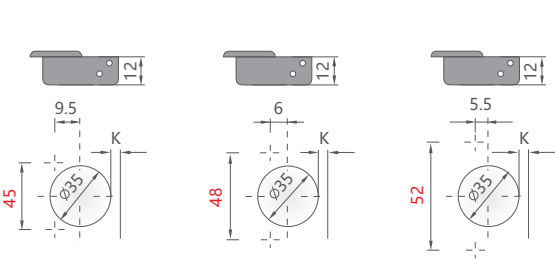

T1系列一字灵动铰链（厚门） T1 fix mounting linear plate soft close hinges

直臂 Full overlay

■ 镍色 HA3526+C35H0
■ 黑钛色 HA3526+C35H0(TG)

C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

■ 镍色 HA3523+C35H0
■ 黑钛色 HA3523+C35H0(TG)

C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

大弯 Inset

■ 镍色 HA3521+C35H0
■ 黑钛色 HA3521+C35H0(TG)

C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back



A5 THICK DOOR HINGE SERIES

A5厚门铰链系列

Linear plate 一字底座

无需分体直接安装，高效便捷。创新三段力，开启免回弹，柜门开合更轻柔舒适。
No need to separate the direct installation, efficient and convenient



固装一字底三段力缓冲铰链（塑料臂盖） Three way fixed mounting linear plate soft close hinge (plastic cover cap)



A51

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 16-30mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 16-30mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.4	2.3	3.2	4.1	5.1	6	7
4		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.8	2.7	3.6	4.5	5.4	6.3
5		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.5	2.2	2.9	3.9	4.8	5.7
6		0.05	0.15	0.25	0.3	0.45	0.6	0.75	0.95	1.2	1.5	1.8	2.6	3.4	4.3	5.2
7		0.05	0.15	0.2	0.3	0.45	0.6	0.75	0.95	1.2	1.4	1.7	2.2	3	3.8	4.7

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1	1	1.2	1.3	1.4
6		1	1	1	1	1	1.2	1.3	1.4	1.6	1.7	1.9	2.0	2.1	2.3	2.4
7		1.5	1.6	1.7	1.9	2.1	2.2	2.3	2.4	2.6	2.7	2.8	3.0	3.1	3.3	3.4

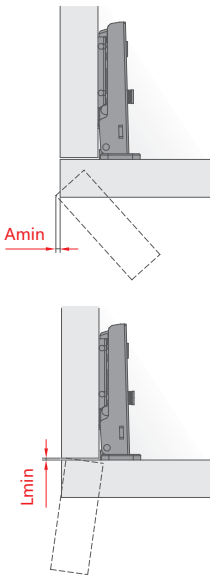


相关信息 Relevant Information

C03
铰杯装饰盖
Hinge Cup Cover cap

A51
铰臂装饰盖(直臂、中弯、大弯)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C51H0I	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

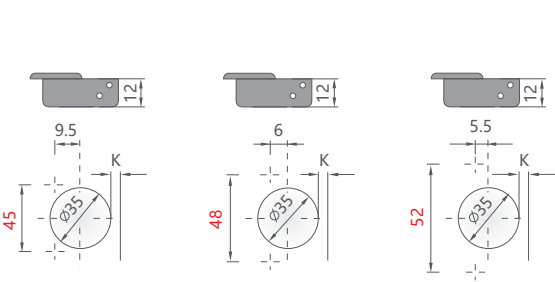


固装一字底三段力缓冲铰链（塑料臂盖） Three way fixed mounting linear plate soft close hinge (plastic cover cap)



直臂 Full overlay

- 镍色 A5126+C51H0I
- 黑钛色 A5126+C51H0I(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17



中弯 Half overlay

- 镍色 A5123+C51H0I
- 黑钛色 A5123+C51H0I(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8



大弯 Inset

- 镍色 A5121+C51H0I
- 黑钛色 A5121+C51H0I(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

固装一字底三段力缓冲铰链（铁臂盖） Three way fixed mounting linear plate soft close hinge (Steel cover cap)



A51

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 16-30mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 16-30mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.4	2.3	3.2	4.1	5.1	6	7
4		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.8	2.7	3.6	4.5	5.4	6.3
5		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.5	2.2	2.9	3.9	4.8	5.7
6		0.05	0.15	0.25	0.3	0.45	0.6	0.75	0.95	1.2	1.5	1.8	2.6	3.4	4.3	5.2
7		0.05	0.15	0.2	0.3	0.45	0.6	0.75	0.95	1.2	1.4	1.7	2.2	3	3.8	4.7

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1	1	1.2	1.3	1.4
6		1	1	1	1	1	1.2	1.3	1.4	1.6	1.7	1.9	2.0	2.1	2.3	2.4
7		1.5	1.6	1.7	1.9	2.1	2.2	2.3	2.4	2.6	2.7	2.8	3.0	3.1	3.3	3.4

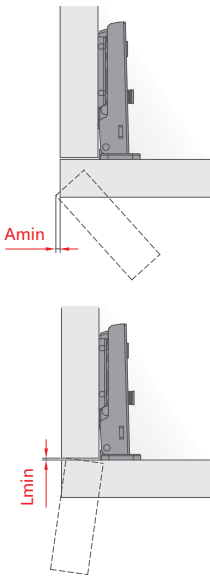

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C51H0I	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

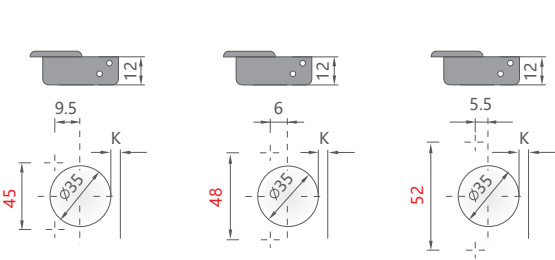

固装一字底三段力缓冲铰链（铁臂盖） Three way fixed mounting linear plate soft close hinge (Steel cover cap)

直臂 Full overlay

■ 镍色 A5126+C51H0I

■ 黑钛色 A5126+C51H0I(TG)

C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

■ 镍色 A5123+C51H0I

■ 黑钛色 A5123+C51H0I(TG)

C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

大弯 Inset

■ 镍色 A5121+C51H0I

■ 黑钛色 A5121+C51H0I(TG)

C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

固装三段力缓冲铰链 Three way fixed mounting plate soft close hinge



A55

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 16-30mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 16-30mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.4	2.3	3.2	4.1	5.1	6	7
4		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.8	2.7	3.6	4.5	5.4	6.3
5		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.5	2.2	2.9	3.9	4.8	5.7
6		0.05	0.15	0.25	0.3	0.45	0.6	0.75	0.95	1.2	1.5	1.8	2.6	3.4	4.3	5.2
7		0.05	0.15	0.2	0.3	0.45	0.6	0.75	0.95	1.2	1.4	1.7	2.2	3	3.8	4.7

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1	1	1.2	1.3	1.4
6		1	1	1	1	1	1.2	1.3	1.4	1.6	1.7	1.9	2.0	2.1	2.3	2.4
7		1.5	1.6	1.7	1.9	2.1	2.2	2.3	2.4	2.6	2.7	2.8	3.0	3.1	3.3	3.4

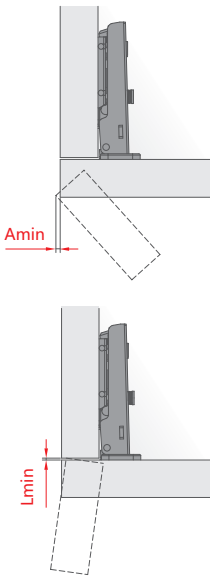

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C55H0、C55H0S、C50H0S	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

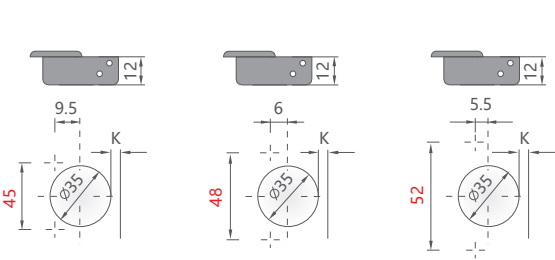

固装三段力缓冲铰链 Three way fixed mounting plate soft close hinge

直臂 Full overlay

■ 镍色 A5526+C55H0S
■ 黑钛色 A5526+C55H0S(TG)

C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

■ 镍色 A5523+C55H0S
■ 黑钛色 A5523+C55H0S(TG)

C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

大弯 Inset

■ 镍色 A5521+C55H0S
■ 黑钛色 A5521+C55H0S(TG)

C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		


门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

固装三段力缓冲铰链 Three way fixed mounting plate soft close hinge

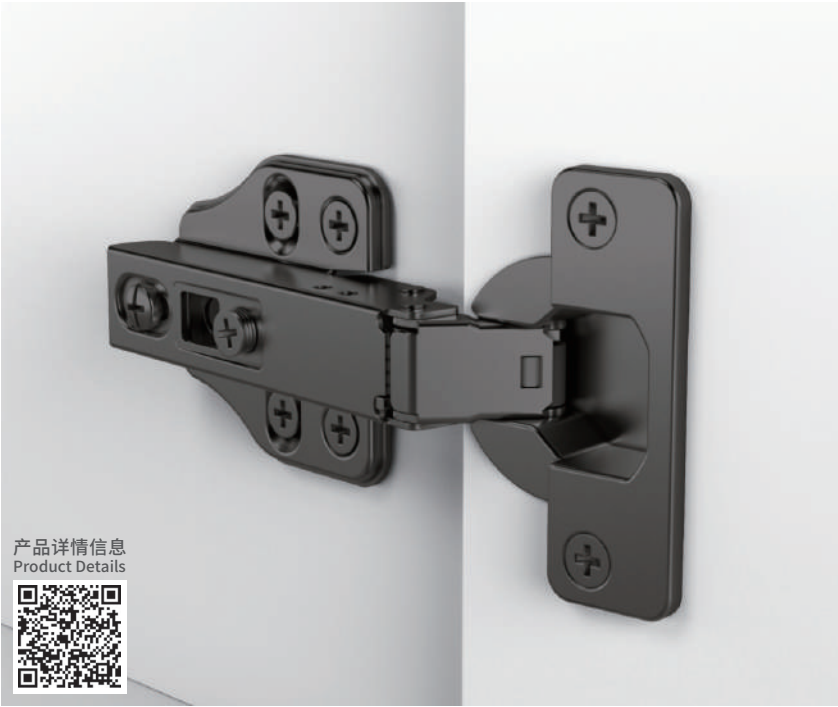

A55

产品介绍 Product Introduction


- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 16-30mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 16-30mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.4	2.3	3.2	4.1	5.1	6	7
4		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.8	2.7	3.6	4.5	5.4	6.3
5		0.05	0.15	0.25	0.35	0.5	0.65	0.8	1.0	1.2	1.5	2.2	2.9	3.9	4.8	5.7
6		0.05	0.15	0.25	0.3	0.45	0.6	0.75	0.95	1.2	1.5	1.8	2.6	3.4	4.3	5.2
7		0.05	0.15	0.2	0.3	0.45	0.6	0.75	0.95	1.2	1.4	1.7	2.2	3	3.8	4.7

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
3		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1	1	1.2	1.3	1.4
6		1	1	1	1	1	1.2	1.3	1.4	1.6	1.7	1.9	2.0	2.1	2.3	2.4
7		1.5	1.6	1.7	1.9	2.1	2.2	2.3	2.4	2.6	2.7	2.8	3.0	3.1	3.3	3.4

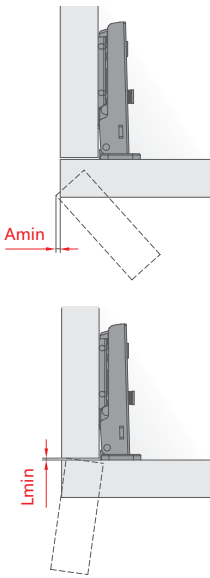

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C55H0、C55H0S、C50H0S	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

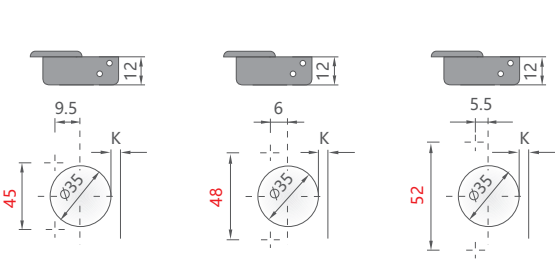

固装三段力缓冲铰链 Three way fixed mounting plate soft close hinge

直臂 Full overlay

- 镍色 A5526+C50H0S
- 黑钛色 A5526+C50H0S(TG)

C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

- 镍色 A5523+C50H0S
- 黑钛色 A5523+C50H0S(TG)

C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

大弯 Inset

- 镍色 A5521+C50H0S
- 黑钛色 A5521+C50H0S(TG)

C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back



HA THICK DOOR ALUMINUM FRAME HINGE SERIES

HA厚门铝框铰链系列

Black Titanium Finish, A Touch of Luxury

黑钛轻奢，高定所选

天斯铝框门铰链作为原创三段力缓冲铰链，柜门开启免回弹，关闭轻柔舒适，其黑钛轻奢外观，与高定家具完美融合，彰显着家具高级感。

This original three-way soft-close hinge not only prevents cabinet door rebound upon opening but also ensures gentle, comfortable closing. Its sleek black titanium finish adds a touch of luxury that integrates seamlessly with various furniture styles.



卡式一字底三维铝框三段力缓冲铰链 Three way aluminum frame soft close hinge, clip-on linear mounting plate (3D)



HA08

产品介绍 Product Introduction


- 开启角度: 98°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P	T	16	17	18	19	20	21	22	23	24	25
19		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21		0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22		0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23		0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) P	T	16	17	18	19	20	21	22	23	24	25
19		1	1	1	1	1	1	1	1	1	1
20		1	1	1	1	1	1	1	1	1	1
21		1	1	1	1	1	1	1	1	1	1
22		1	1	1	1	1	1	1	1	1	1
23		1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

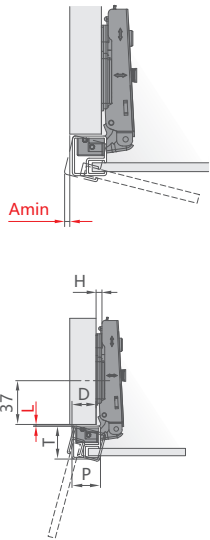


相关信息 Relevant Information

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap


A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE


铝材开槽尺寸 Aluminum frame grooving dimensions

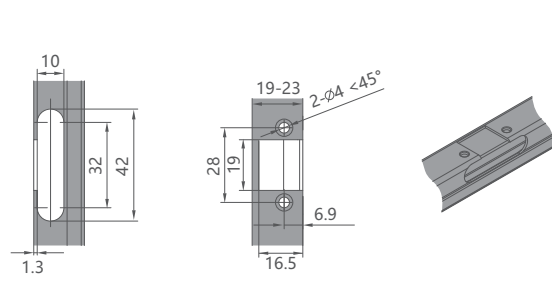

卡式一字底三维铝框三段力缓冲铰链 Three way aluminum frame soft close hinge, clip-on linear mounting plate (3D)

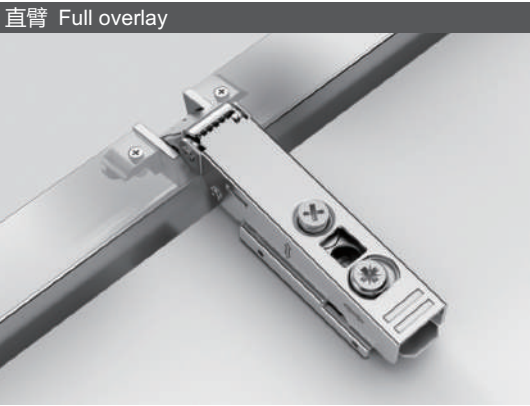

- 镍色 HA0826+C21H0I
- 黑钛色 HA0826+C21H0I(TG)




C=0 H=-2+P-D

D	H	P	19	20	21	22	23
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17




- 镍色 HA0823+C21H0I
- 黑钛色 HA0823+C21H0I(TG)




C=9 H=-11+P-D

D	H	P	19	20	21	22	23
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8

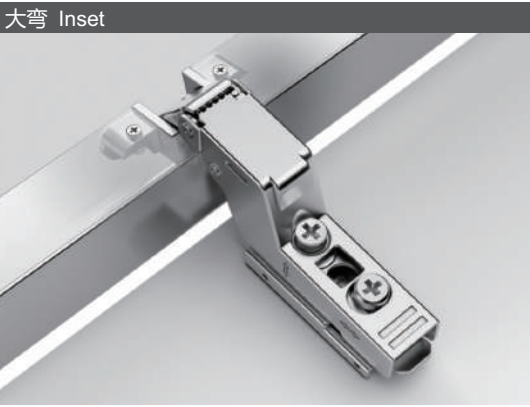

- 镍色 HA0821+C21H0I
- 黑钛色 HA0821+C21H0I(TG)



C=18 H=-20+P+A

A	H	P	19	20	21	22	23
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front /Back

卡式三维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft closing hinge (3D)



HA08

产品介绍 Product Introduction


- 开启角度: 98°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P T	16	17	18	19	20	21	22	23	24	25
19	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) P T	16	17	18	19	20	21	22	23	24	25
19	1	1	1	1	1	1	1	1	1	1
20	1	1	1	1	1	1	1	1	1	1
21	1	1	1	1	1	1	1	1	1	1
22	1	1	1	1	1	1	1	1	1	1
23	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

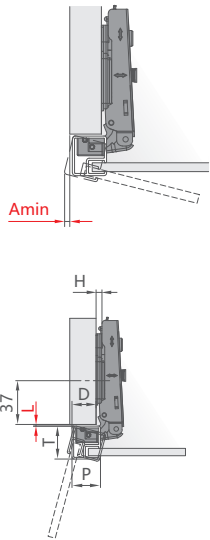


相关信息 Relevant Information

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE

铝材开槽尺寸 Aluminum frame grooving dimensions

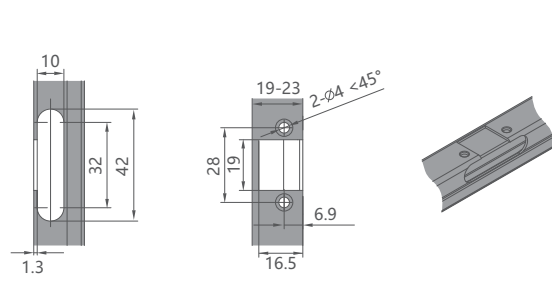

卡式三维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft closing hinge (3D)

直臂 Full overlay

■ 镍色 HA0826+C20H0I
■ 黑钛色 HA0826+C20H0I(TG)

C=0 H=-2+P-D

D H P	19	20	21	22	23
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

中弯 Half overlay

■ 镍色 HA0823+C20H0I
■ 黑钛色 HA0823+C20H0I(TG)

C=9 H=-11+P-D

D H P	19	20	21	22	23
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯 Inset

■ 镍色 HA0821+C20H0I
■ 黑钛色 HA0821+C20H0I(TG)

C=18 H=-20+P+A

A H P	19	20	21	22	23
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front /Back

卡式二维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft closing hinge (2D)



HA08

产品介绍 Product Introduction


- 开启角度: 98°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P T	16	17	18	19	20	21	22	23	24	25
19	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) P T	16	17	18	19	20	21	22	23	24	25
19	1	1	1	1	1	1	1	1	1	1
20	1	1	1	1	1	1	1	1	1	1
21	1	1	1	1	1	1	1	1	1	1
22	1	1	1	1	1	1	1	1	1	1
23	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

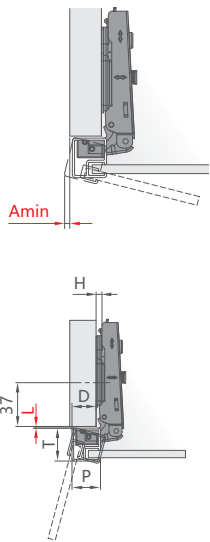


相关信息 Relevant Information

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE

铝材开槽尺寸 Aluminum frame grooving dimensions

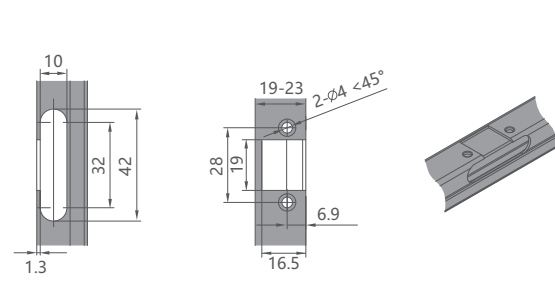

卡式二维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft closing hinge (2D)

直臂 Full overlay

■ 镍色 HA0826+C02H0S
■ 黑钛色 HA0826+C02H0S(TG)

C=0 H=-2+P-D

D H P	19	20	21	22	23
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

中弯 Half overlay

■ 镍色 HA0823+C02H0S
■ 黑钛色 HA0823+C02H0S(TG)

C=9 H=-11+P-D

D H P	19	20	21	22	23
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯 Inset

■ 镍色 HA0821+C02H0S
■ 黑钛色 HA0821+C02H0S(TG)

C=18 H=-20+P+A

A H P	19	20	21	22	23
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front /Back

卡式铝框三段力缓冲铰链 Three way clip-on aluminum frame soft close hinge



HA11

产品介绍 Product Introduction


- 开启角度: 98°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P T	16	17	18	19	20	21	22	23	24	25
19	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) P T	16	17	18	19	20	21	22	23	24	25
19	1	1	1	1	1	1	1	1	1	1
20	1	1	1	1	1	1	1	1	1	1
21	1	1	1	1	1	1	1	1	1	1
22	1	1	1	1	1	1	1	1	1	1
23	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8

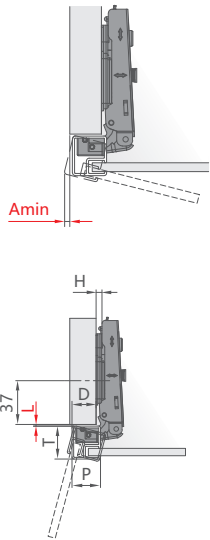


相关信息 Relevant Information

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE

铝材开槽尺寸 Aluminum frame grooving dimensions

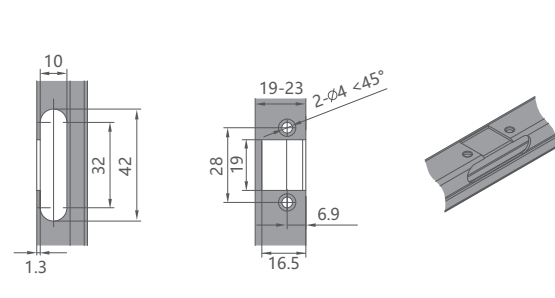

卡式铝框三段力缓冲铰链 Three way clip-on aluminum frame soft close hinge

直臂 Full overlay

■ 镍色 HA1126+C02H0S

■ 黑钛色 HA1126+C02H0S(TG)

C=0 H=-2+P-D

D H P	19	20	21	22	23
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

中弯 Half overlay

■ 镍色 HA1123+C02H0S

■ 黑钛色 HA1123+C02H0S(TG)

C=9 H=-11+P-D

D H P	19	20	21	22	23
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯 Inset


■ 镍色 HA1121+C02H0S

■ 黑钛色 HA1121+C02H0S(TG)

C=18 H=-20+P+A

A H P	19	20	21	22	23
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

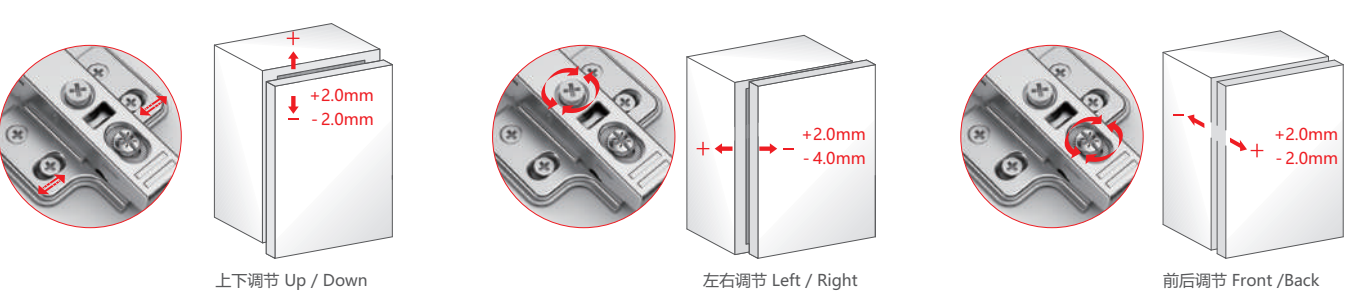

固装铝框三段力缓冲铰链 Three way fixed mounting plate aluminum frame soft close hinge



HA38

产品介绍 Product Introduction


- 开启角度: 98°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P T	16	17	18	19	20	21	22	23	24	25
19	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4


门板最小间隙 Minimum Gap Of Door Panels

L(min) P T	16	17	18	19	20	21	22	23	24	25
19	1	1	1	1	1	1	1	1	1	1
20	1	1	1	1	1	1	1	1	1	1
21	1	1	1	1	1	1	1	1	1	1
22	1	1	1	1	1	1	1	1	1	1
23	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8



相关信息 Relevant Information

铝材开槽尺寸 Aluminum frame grooving dimensions

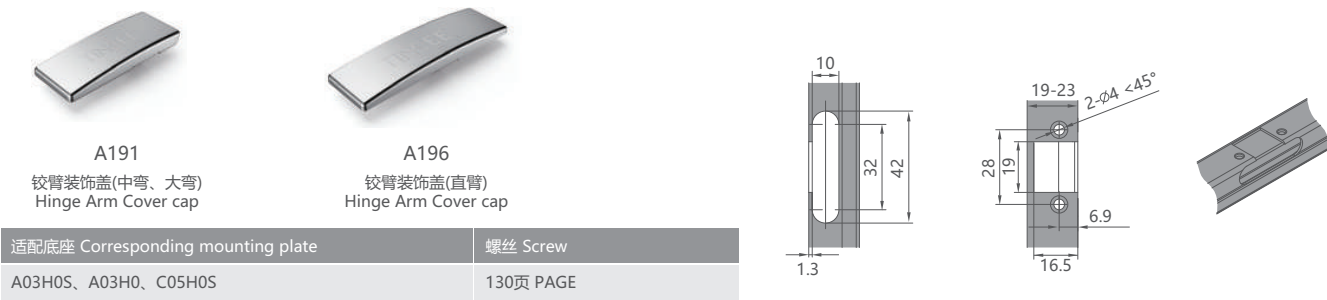

固装铝框三段力缓冲铰链 Three way fixed mounting plate aluminum frame soft close hinge

直臂 Full overlay

■ 镍色 HA3826+C05H0S
■ 黑钛色 HA3826+C05H0S(TG)

Diagram showing dimensions H, D, L, P.

C=0 H=-2+P-D

D H P	19	20	21	22	23
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

中弯 Half overlay

■ 镍色 HA3823+C05H0S
■ 黑钛色 HA3823+C05H0S(TG)

Diagram showing dimensions H, D, L, P.

C=9 H=-11+P-D

D H P	19	20	21	22	23
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯 Inset


■ 镍色 HA3821+C05H0S
■ 黑钛色 HA3821+C05H0S(TG)

Diagram showing dimensions H, D, L, P, A.

C=18 H=-20+P+A

A H P	19	20	21	22	23
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

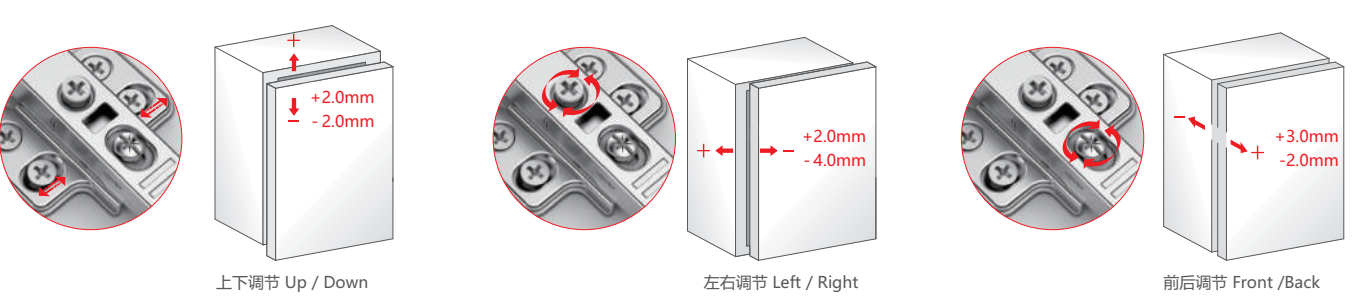



HA THICK DOOR SPECIAL ANGLE HINGE SERIES

HA厚门特殊角度铰链系列

Cleaner and more upscale
更加整洁和高档

方便用户使用柜内空间，可完全展示和取出柜子内的物品。
Convenient for users to use the space in the cabinet, can fully display and take out the items in the cabinet



卡式三维三段力缓冲角度铰链 Three way clip-on soft close angle hinge (3D)



HA12

产品介绍 Product Introduction

- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H


相关信息 Relevant Information

铰杯尺寸 Hinge Cup Dimensions


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C12H0S、C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE

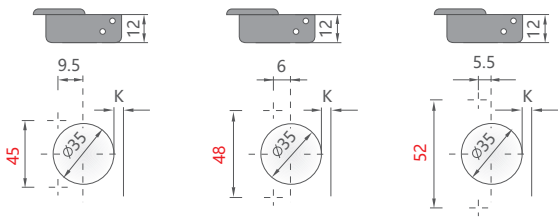


门板调节 Door Panel Adjustment

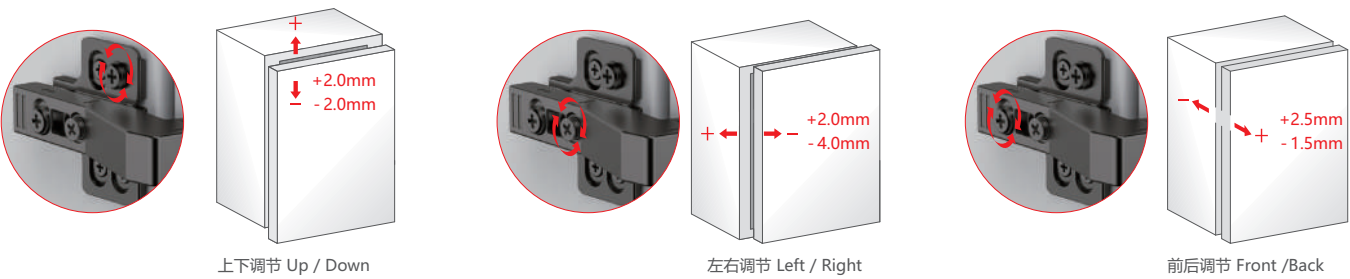

卡式三维三段力缓冲角度铰链 Three way clip-on soft close angle hinge (3D)




- 镍色 HA1223+C20H0I
- 黑钛色 HA1223+C20H0I(TG)



D	H	K	4	5
0	37	2.0	36	2.0
2	37	0	36	0
4	37	-2	36	-2
X			D	




- 镍色 HA1222+C20H0I
- 黑钛色 HA1222+C20H0I(TG)



D	H	K	4	5	6	7
0	37	4.5	36	5.4	35	6.3
2	37	2.5	36	3.4	35	4.3
4	37	0.5	36	1.4	35	2.3
X			D			




- 镍色 HA1221+C20H0I
- 黑钛色 HA1221+C20H0I(TG)



D	H	K	4	5	6	7
0	37	2.5	36	3.4	35	4.3
2	37	0.5	36	1.4	35	2.3
4	37	-1.5	36	1.6	35	0.3
X			D			

卡式二维三段力缓冲角度铰链 Three way clip-on soft close angle hinge (2D)

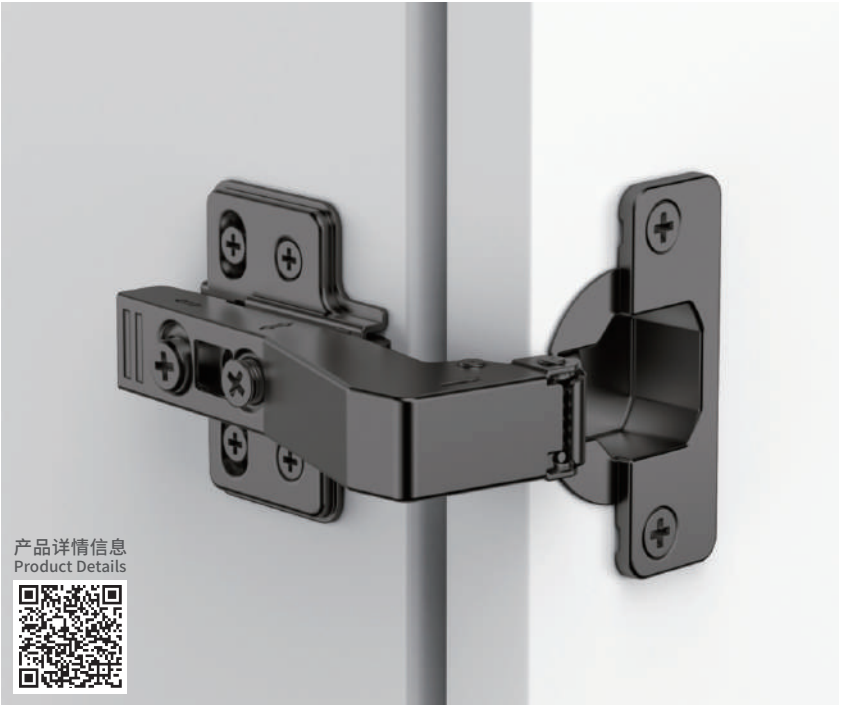

HA12

产品介绍 Product Introduction

- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H


相关信息 Relevant Information

铰杯尺寸 Hinge Cup Dimensions

C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C12H0S、C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE

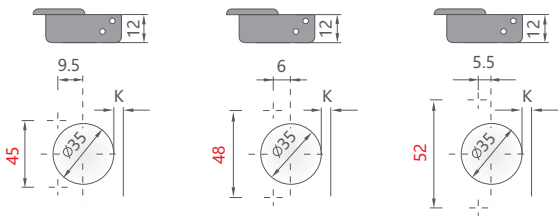


门板调节 Door Panel Adjustment

上下调节 Up / Down


左右调节 Left / Right

前后调节 Front / Back

卡式二维三段力缓冲角度铰链 Three way clip-on soft close angle hinge (2D)

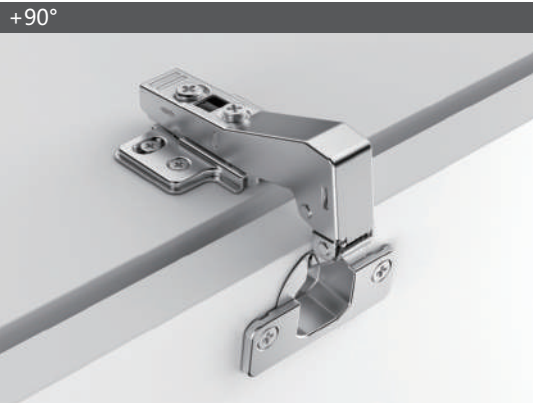


- 镍色 HA1223+C12H0S
- 黑钛色 HA1223+C12H0S(TG)



D	H	K	4	5
0	37	2.0	36	2.0
2	37	0	36	0
4	37	-2	36	-2
X			D	




- 镍色 HA1222+C02H0S
- 黑钛色 HA1222+C02H0S(TG)



D	H	K	4	5	6	7
0	37	4.5	36	5.4	35	6.3
2	37	2.5	36	3.4	35	4.3
4	37	0.5	36	1.4	35	2.3
X			D			




- 镍色 HA1221+C02H0S
- 黑钛色 HA1221+C02H0S(TG)



D	H	K	4	5	6	7
0	37	2.5	36	3.4	35	4.3
2	37	0.5	36	1.4	35	2.3
4	37	-1.5	36	1.6	35	0.3
X			D			

卡式三段力缓冲角度铰链 Three way clip-on soft close angle hinge

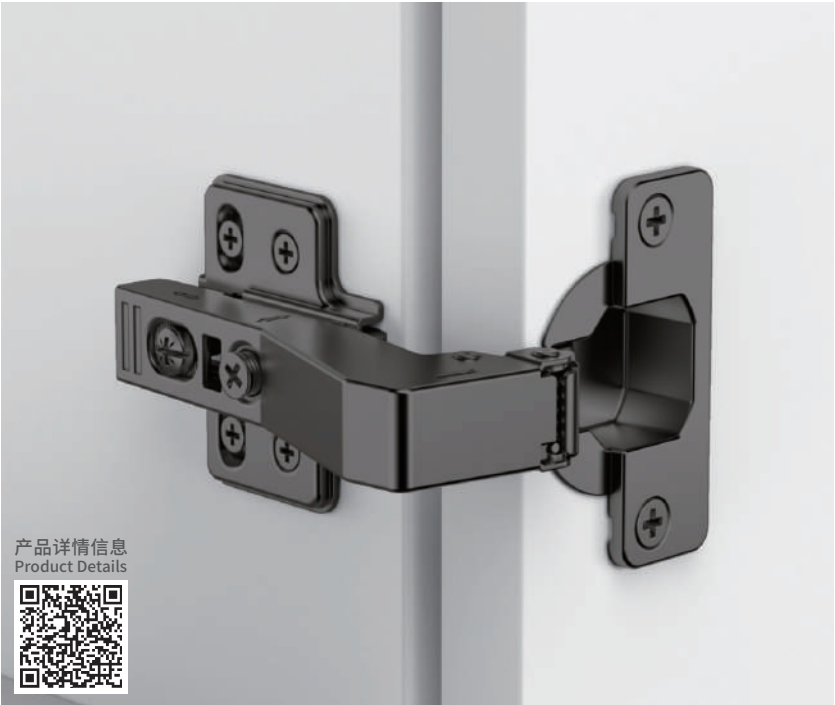

HA13

产品介绍 Product Introduction

- 开启角度: 98°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-25mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 98°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-25mm
- NSS Test Standards: 48H、72H、96H


相关信息 Relevant Information

铰杯尺寸 Hinge Cup Dimensions


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C12H0S、C20H0I、C02H0S、C02H0	130页 PAGE

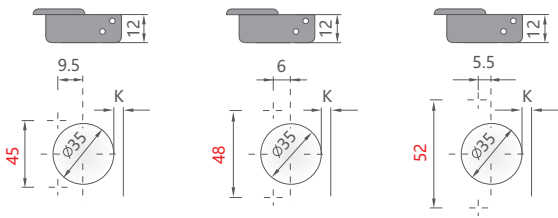


门板调节 Door Panel Adjustment

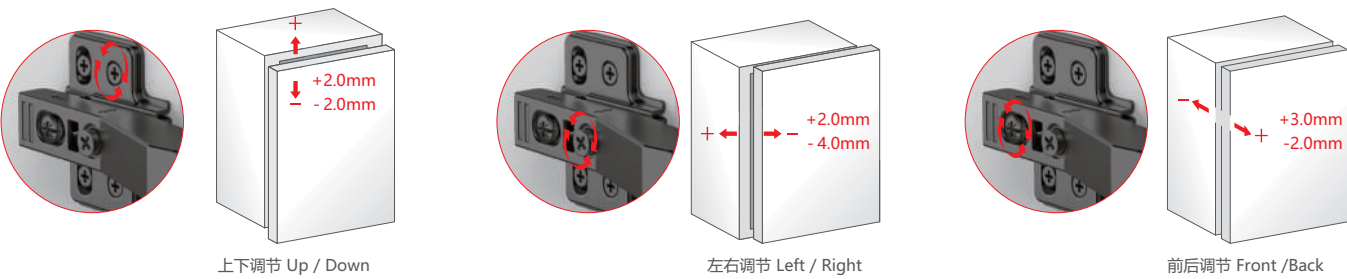

卡式三段力缓冲角度铰链 Three way clip-on soft close angle hinge




- 镍色 HA1323+C12H0S
- 黑钛色 HA1323+C12H0S(TG)



D	H	K	4	5
0	37	2.0	36	2.0
2	37	0	36	0
4	37	-2	36	-2
X				D




- 镍色 HA1322+C02H0S
- 黑钛色 HA1322+C02H0S(TG)



D	H	K	4	5	6	7
0	37	4.5	36	5.4	35	6.3
2	37	2.5	36	3.4	35	4.3
4	37	0.5	36	1.4	35	2.3
X						D



- 镍色 HA1321+C02H0S
- 黑钛色 HA1321+C02H0S(TG)



D	H	K	4	5	6	7
0	37	2.5	36	3.4	35	4.3
2	37	0.5	36	1.4	35	2.3
4	37	-1.5	36	1.6	35	0.3
X						D



天斯 TINCEE

HINGE SERIES

铰链系列

天斯铰链作为全球发明专利产品，秉持着工匠精神来制造产品，不断的适应市场需求，精益求精，以创新为企业第一生产力，推陈出新。作为可以平替进口品牌的铰链，采用的是防锈材料，增强了其耐腐蚀性，同时通过了盐雾测试机和抽拉测试机的测试，保证天斯铰链久用如新。天斯，您值得信赖的好伙伴。

As a global invention patented product, TINCEE Hinge adheres to the spirit of craftsmanship to manufacture products, constantly adapt to market demand, strive for excellence, take innovation as the first productive force of the enterprise, and bring forth the new. As a hinge that can be replaced by imported brands, the use of rust-proof materials to enhance its corrosion resistance, while passing the test of salt spray testing machine and pull testing machine, to ensure that the TINCEE hinge long used as new. TINCEE, your trustworthy partner.



AJ19 HINGE SERIES

AJ19铰链系列

Three way clip-on soft close hinge (3D)
卡式三维三段力缓冲铰链

创新三段力铰链，柜门开启免回弹，具有超强的承重能力，并且使用寿命长，性价比高
It has super heavy loading capacity, rebounding free, a long lifespan and cost-effectiveness.



卡式一字底三维三段力缓冲铰链 Three way soft close hinge (3D), clip-on linear plate



AJ19

产品介绍 Product Introduction


- 开启角度：105°
- 开孔尺寸：35mm
- 铰杯深度：12mm
- 铰杯孔距：45/9.5、48/6、52/5.5
- 开孔距离：3-7mm
- 适用门板：15-22mm
- 盐雾测试：48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

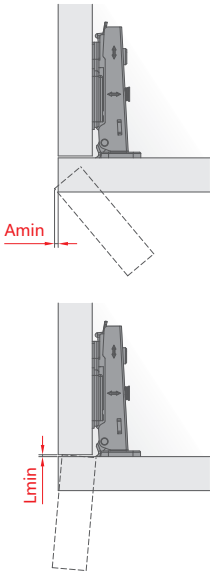

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

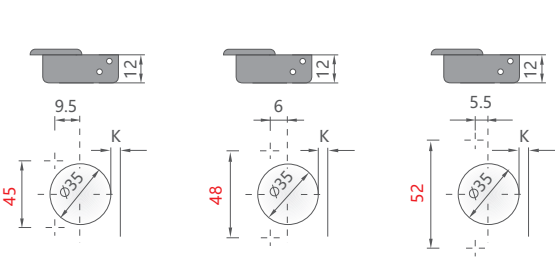

卡式一字底三维三段力缓冲铰链 Three way soft close hinge (3D), clip-on linear plate




- 镍色 AJ1926+C21H0I
- 黑钛色 AJ1926+C21H0I(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

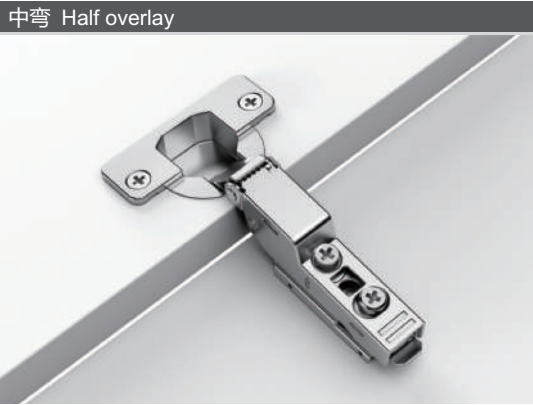

- 镍色 AJ1923+C21H0I
- 黑钛色 AJ1923+C21H0I(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		




- 镍色 AJ1921+C21H0I
- 黑钛色 AJ1921+C21H0I(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

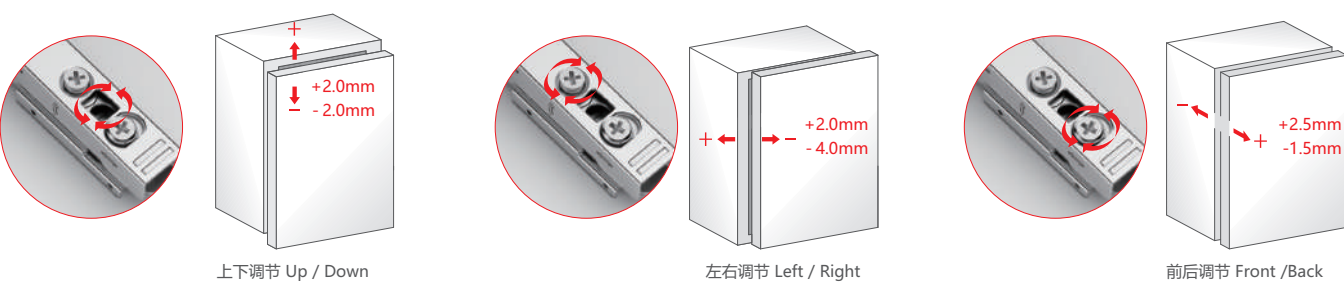

卡式三维三段力缓冲铰链 Three way clip-on soft close hinge (3D)



AJ19

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

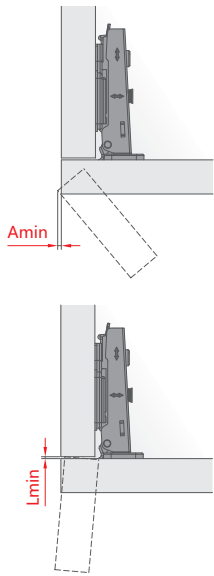

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap


A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

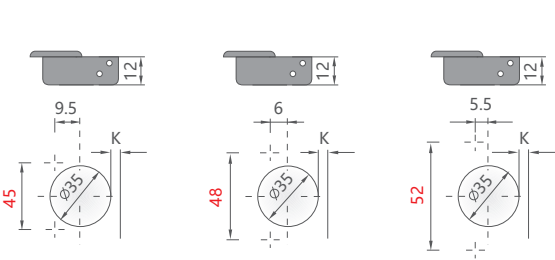

卡式三维三段力缓冲铰链 Three way clip-on soft close hinge (3D)

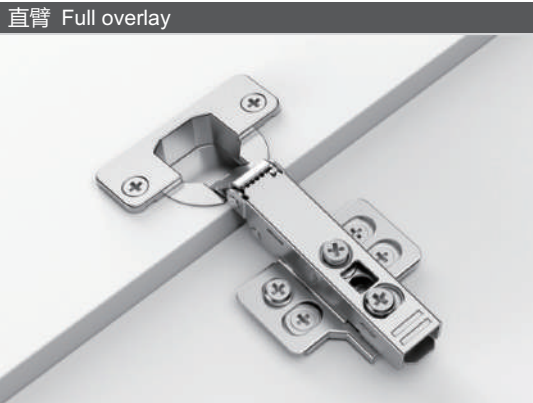


- 镍色 AJ1926+C20H0I
- 黑钛色 AJ1926+C20H0I(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

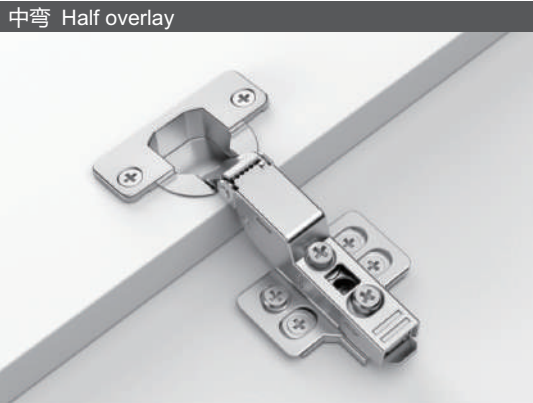


- 镍色 AJ1923+C20H0I
- 黑钛色 AJ1923+C20H0I(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

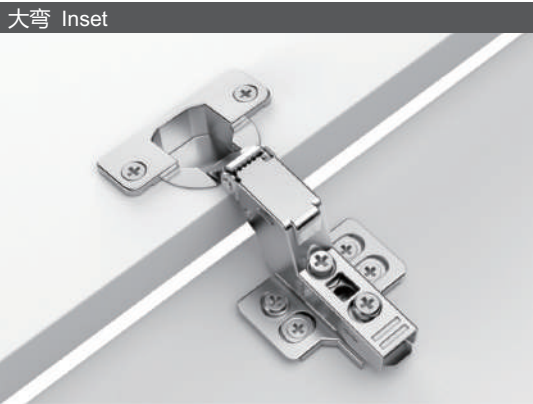

- 镍色 AJ1921+C20H0I
- 黑钛色 AJ1921+C20H0I(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

卡式二维三段力缓冲铰链 Three way clip-on soft close hinge (2D)



AJ19

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

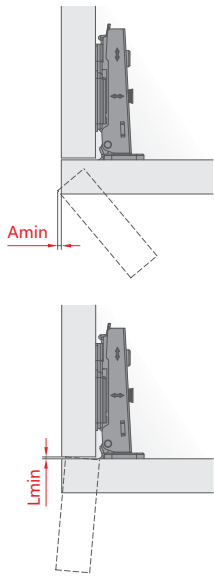

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap


A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H01、C20H01、C02H0S、C02H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

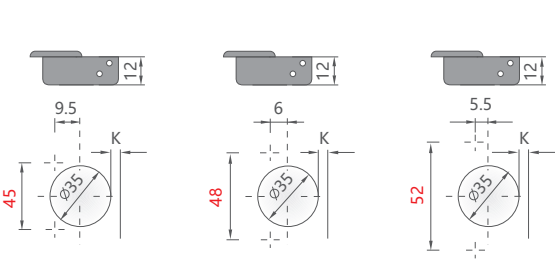

卡式二维三段力缓冲铰链 Three way clip-on soft close hinge (2D)

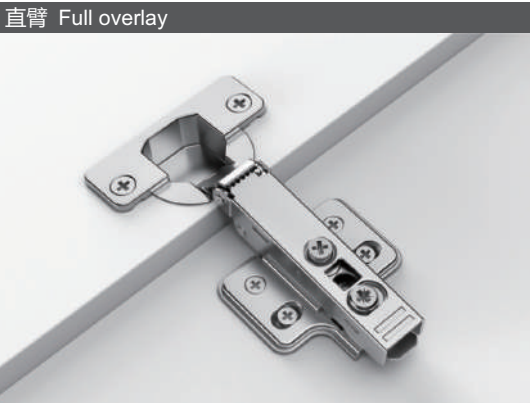


- 镍色 AJ1926+C02H0S
- 黑钛色 AJ1926+C02H0S(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

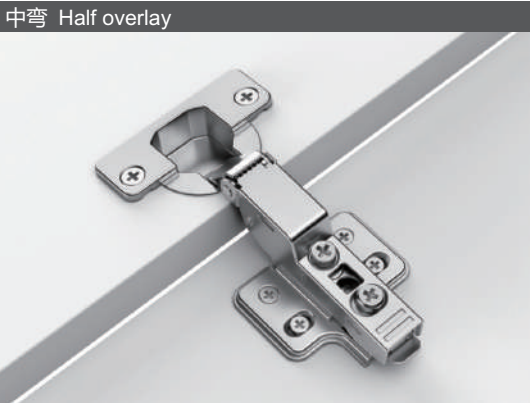


- 镍色 AJ1923+C02H0S
- 黑钛色 AJ1923+C02H0S(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

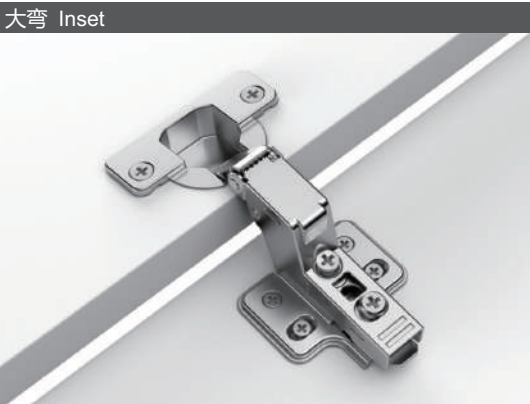


- 镍色 AJ1921+C02H0S
- 黑钛色 AJ1921+C02H0S(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

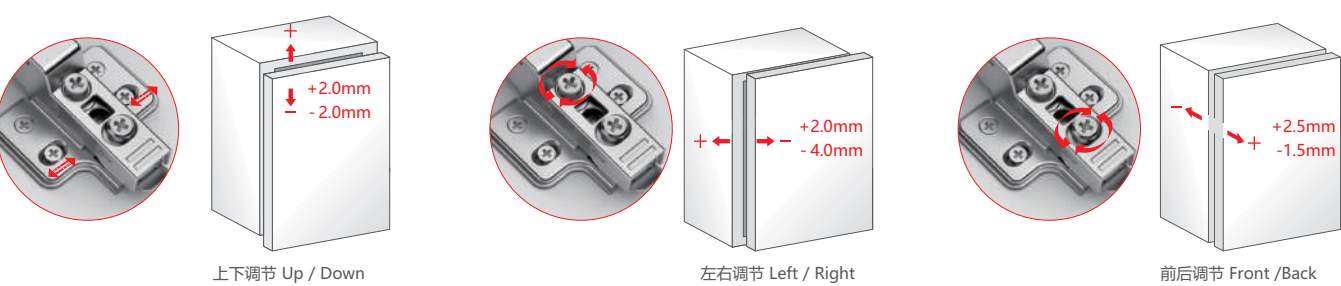

卡式三段力缓冲铰链 Three way clip-on soft close hinge



AJ04

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

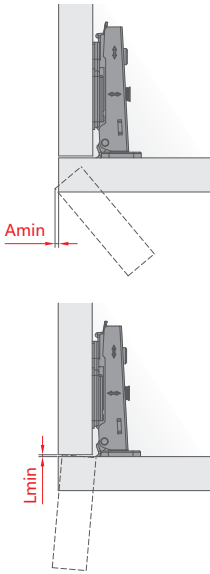

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C20H0I、C02H0S、C02H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

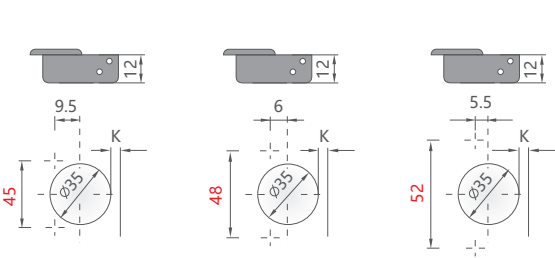

卡式三段力缓冲铰链 Three way clip-on soft close hinge

直臂 Full overlay

■ 镍色 AJ0426+C02H0S
■ 黑钛色 AJ0426+C02H0S(TG)

C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

■ 镍色 AJ0423+C02H0S
■ 黑钛色 AJ0423+C02H0S(TG)

C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

大弯 Inset

■ 镍色 AJ0421+C02H0S
■ 黑钛色 AJ0421+C02H0S(TG)

C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back



SA STAINLESS STEEL HINGE SERIES

SA不锈钢铰链系列

Stainless steel hinge 不锈钢铰链

具有优良的耐腐蚀性，高强度，高硬度，长寿命，而且美观性好，环保健康
It has excellent corrosion resistance, high strength, high hardness, long life, and brings you good aesthetics, environmental friendly life



卡式二维三段力缓冲不锈钢铰链 Three way clip-on soft close stainless steel hinge (2D)



SA19

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- 可选材质: 304、201
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H
- Optional material: 304、201

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels


L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

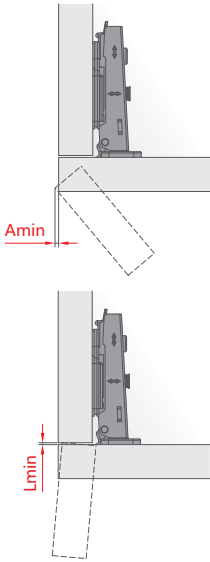

相关信息 Relevant Information



铰杯尺寸 Hinge Cup Dimensions

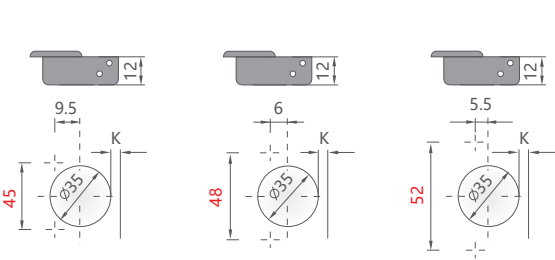

卡式二维三段力缓冲不锈钢铰链 Three way clip-on soft close stainless steel hinge (2D)

直臂 Full overlay

SA1926+SC02H0S(201)
SA1926+SC02H0S(304)

C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

SA1923+SC02H0S(201)
SA1923+SC02H0S(304)

C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		


大弯 Inset

SA1921+SC02H0S(201)
SA1921+SC02H0S(304)

C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

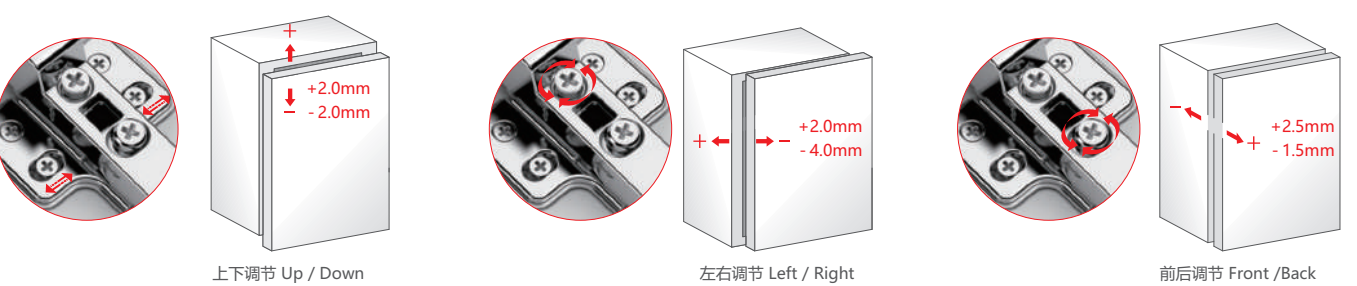

卡式三段力缓冲不锈钢铰链 Three way clip-on soft close stainless steel hinge



SA04

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- 可选材质: 304、201
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H
- Optional material: 304、201

铰链切割量 Hinge Coverage Table

A(min) K T	15	16	17	18	19	20	21	22
3	0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4	0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5	0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6	0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7	0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K T	15	16	17	18	19	20	21	22
3	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1.2	1.3
5	1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6	2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7	3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

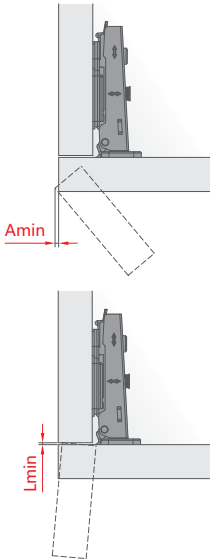

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
SC02H0S、SC02H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

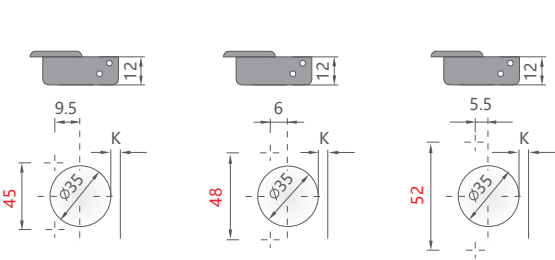

卡式三段力缓冲不锈钢铰链 Three way clip-on soft close stainless steel hinge

直臂 Full overlay

- SA0426+SC02H0S(201)
- SA0426+SC02H0S(304)

C=0 H=14+K-D

D H K	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

中弯 Half overlay

- SA0423+SC02H0S(201)
- SA0423+SC02H0S(304)

C=9 H=5+K-D

D H K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯 Inset

- SA0421+SC02H0S(201)
- SA0421+SC02H0S(304)

C=18 H=-4+K+A

A H K	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

固装三段力缓冲不锈钢铰链 Three way fixed mounting plate soft close stainless steel hinge



SA39

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- 可选材质: 304、201
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H
- Optional material: 304、201

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

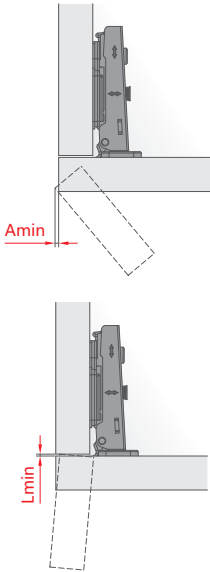

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
SC05H0S	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

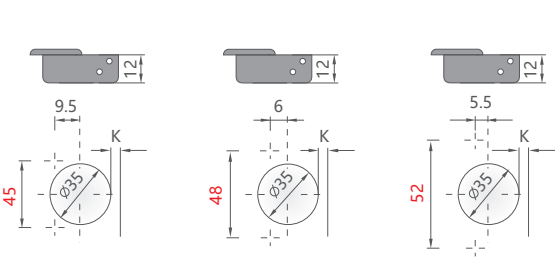


固装三段力缓冲不锈钢铰链 Three way fixed mounting plate soft close stainless steel hinge




直臂 Full overlay

- SA3926+SC05H0S(201)
- SA3926+SC05H0S(304)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

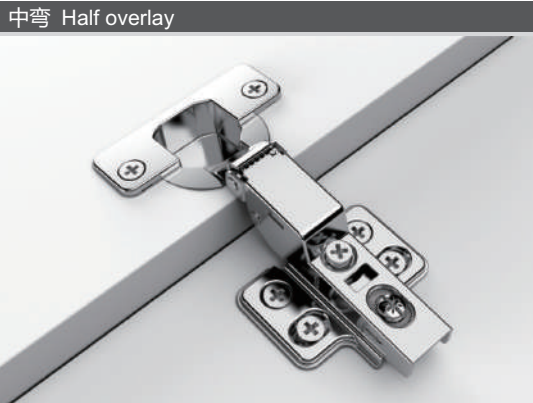


中弯 Half overlay

- SA3923+SC05H0S(201)
- SA3923+SC05H0S(304)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

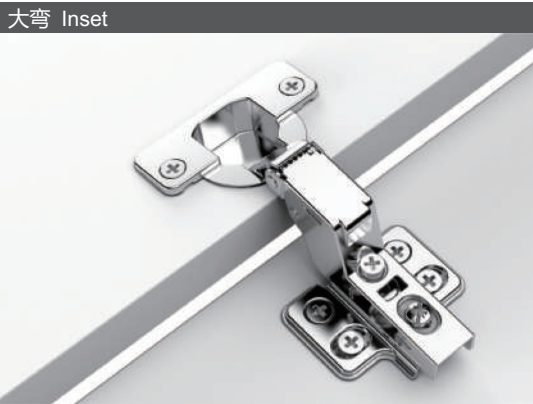

大弯 Inset

- SA3921+SC05H0S(201)
- SA3921+SC05H0S(304)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

T1系列一字灵动铰链（薄门款） T1 fix mounting linear plate soft close hinges



A35

产品介绍 Product Introduction


- 开启角度：105°
- 开孔尺寸：35mm
- 铰杯深度：12mm
- 铰杯孔距：45/9.5、48/6、52/5.5
- 开孔距离：3-7mm
- 适用门板：15-20mm
- 盐雾测试：48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-20mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20
3		0.4	0.4	0.6	0.8	1.2	1.6
4		0.4	0.4	0.6	0.8	1.1	1.5
5		0.4	0.4	0.6	0.8	1.1	1.4
6		0.4	0.4	0.5	0.7	1.0	1.3
7		0.4	0.4	0.5	0.7	1.0	1.3

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20
3		1	1	1	1	1	1
4		1	1	1	1	1	1
5		1.5	1.5	1.6	1.7	1.9	2.0
6		2.5	2.5	2.6	2.8	2.9	3.0
7		3.5	3.5	3.6	3.7	3.9	4.0

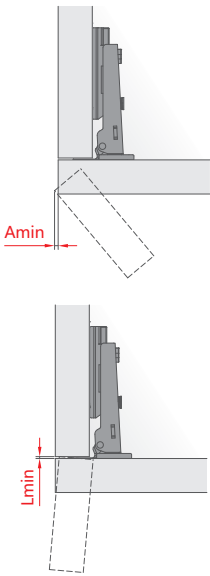

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap


A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

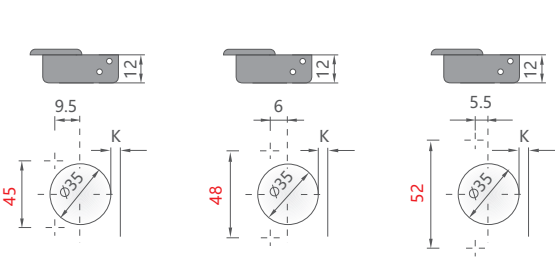

T1系列一字灵动铰链（薄门款） T1 fix mounting linear plate soft close hinges

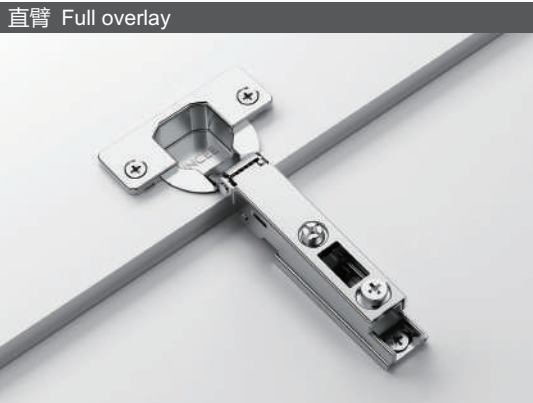

- 镍色 A3526+C35H0
- 黑钛色 A3526+C35H0(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17




- 镍色 A3523+C35H0
- 黑钛色 A3523+C35H0(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8

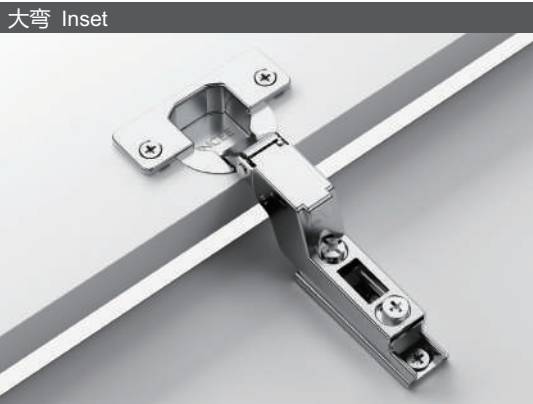

- 镍色 A3521+C35H0
- 黑钛色 A3521+C35H0(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back



AJ39 FIXED MOUNTING PLATE HINGE SERIES

AJ39固装铰链系列

Three way hinge 三段力铰链

防止门板弹动，避免侧板螺丝松动，有效保护柜体门，使用寿命更长
Prevent the cabinet door from rebounding, avoid the side panel screws from loosening, effectively protect the cabinet door, and have a longer lifespan.



固装三段力缓冲铰链 Three way fixed mounting plate soft close hinge



AJ39

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

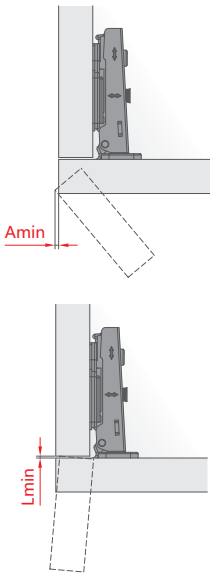

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap


A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
A03H0S、A03H0、C05H0S、C05H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

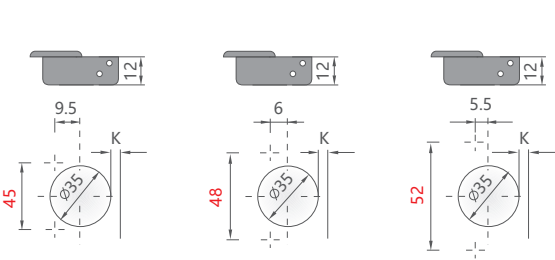

固装三段力缓冲铰链 Three way fixed mounting plate soft close hinge

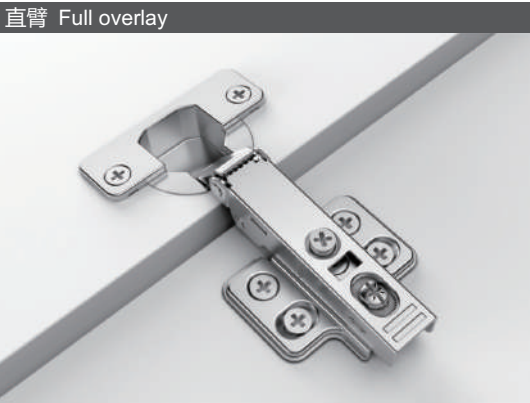


- 镍色 AJ3926+C05H0S
- 黑钛色 AJ3926+C05H0S(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

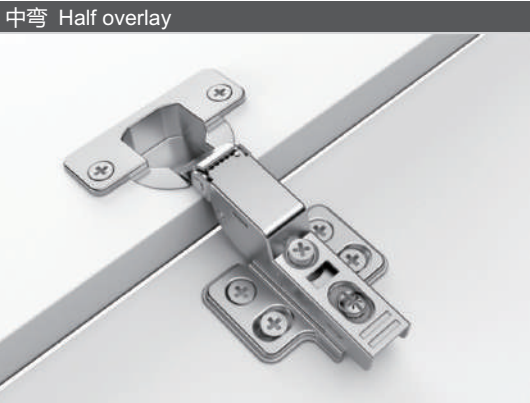


- 镍色 AJ3923+C05H0S
- 黑钛色 AJ3923+C05H0S(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

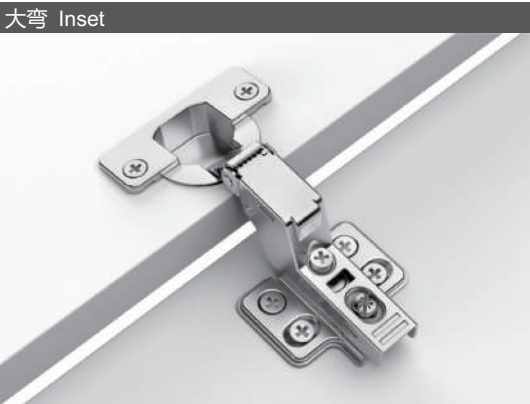

- 镍色 AJ3921+C05H0S
- 黑钛色 AJ3921+C05H0S(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back



AJ08 ALUMINUM FRAME HINGE SERIES

AJ08铝框铰链系列

Three dimensional adjustable design 三维可调设计

阻尼缓冲，门板前三维调节，承重能力强，经久耐用
The door is closing softly due to this hinge, which is adjustable in 3 dimensions, and with strong loading capacity and high durability.



卡式一字底三维铝框三段力缓冲铰链 Three way aluminum frame soft close hinge (3D), Clip-on linear plate



AJ08

产品介绍 Product Introduction


- 开启角度: 105°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P	T	16	17	18	19	20	21	22	23	24	25
19		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21		0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22		0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23		0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4


门板最小间隙 Minimum Gap Of Door Panels

L(min) P	T	16	17	18	19	20	21	22	23	24	25
19		1	1	1	1	1	1	1	1	1	1
20		1	1	1	1	1	1	1	1	1	1
21		1	1	1	1	1	1	1	1	1	1
22		1	1	1	1	1	1	1	1	1	1
23		1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8




相关信息 Relevant Information


铝材开槽尺寸 Aluminum frame grooving dimensions

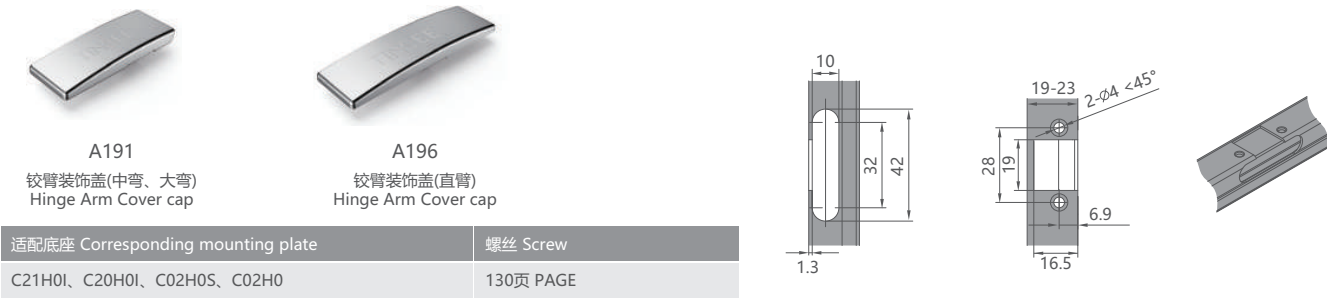

卡式一字底三维铝框三段力缓冲铰链 Three way aluminum frame soft close hinge (3D), Clip-on linear plate

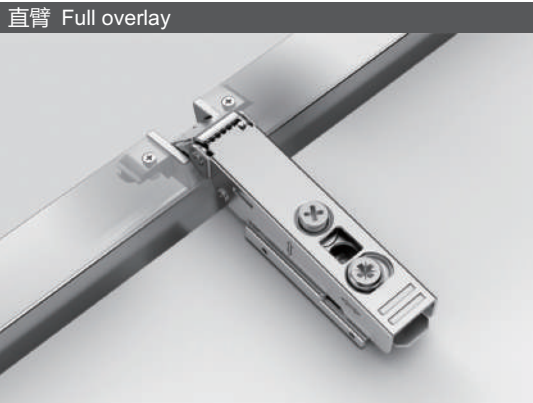

- 镍色 AJ0826+C21H0I
- 黑钛色 AJ0826+C21H0I(TG)




C=0 H=-2+P-D

D	H	P	19	20	21	22	23
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17




- 镍色 AJ0823+C21H0I
- 黑钛色 AJ0823+C21H0I(TG)




C=9 H=-11+P-D

D	H	P	19	20	21	22	23
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8

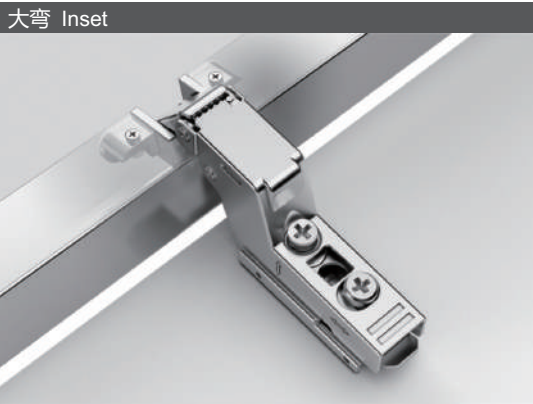


- 镍色 AJ0821+C21H0I
- 黑钛色 AJ0821+C21H0I(TG)



C=18 H=-20+P+A

A	H	P	19	20	21	22	23
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

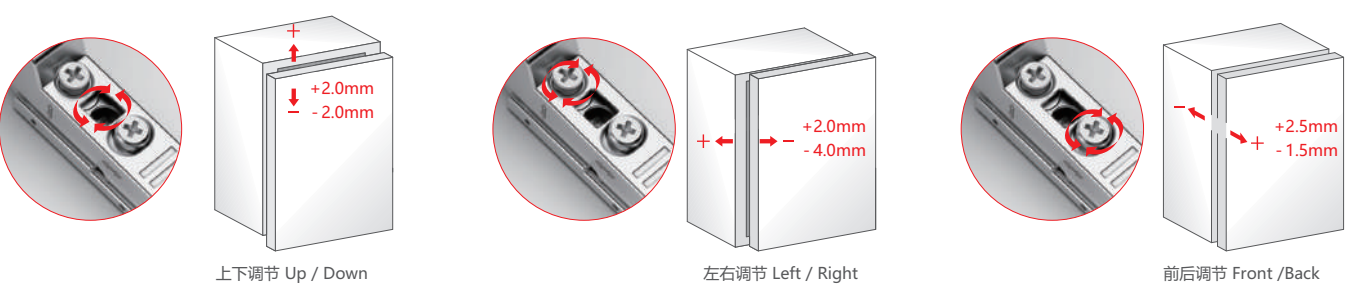

卡式三维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft close hinge (3D)



AJ08

产品介绍 Product Introduction

- 开启角度: 105°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H




铰链切割量 Hinge Coverage Table

A(min) P	T	16	17	18	19	20	21	22	23	24	25
19		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21		0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22		0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23		0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4


门板最小间隙 Minimum Gap Of Door Panels

L(min) P	T	16	17	18	19	20	21	22	23	24	25
19		1	1	1	1	1	1	1	1	1	1
20		1	1	1	1	1	1	1	1	1	1
21		1	1	1	1	1	1	1	1	1	1
22		1	1	1	1	1	1	1	1	1	1
23		1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8




相关信息 Relevant Information


铝材开槽尺寸 Aluminum frame grooving dimensions

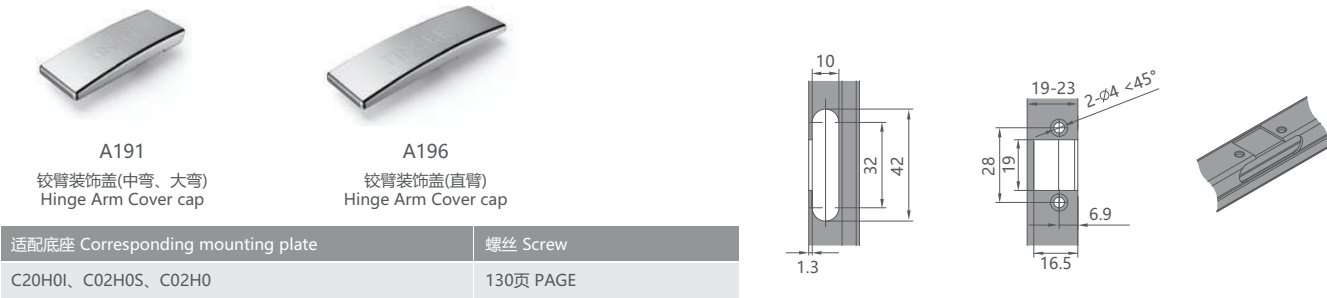

卡式三维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft closing hinge (3D)

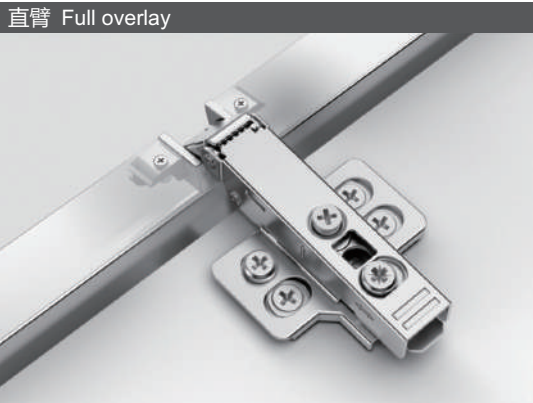


- 镍色 AJ0826+C20H0I
- 黑钛色 AJ0826+C20H0I(TG)




C=0 H=-2+P-D

D	H	P	19	20	21	22	23
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17

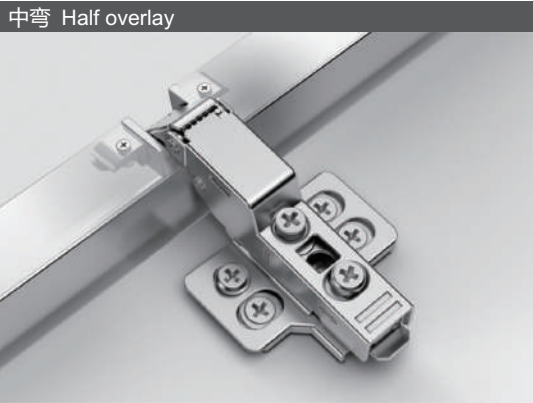


- 镍色 AJ0823+C20H0I
- 黑钛色 AJ0823+C20H0I(TG)




C=9 H=-11+P-D

D	H	P	19	20	21	22	23
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8

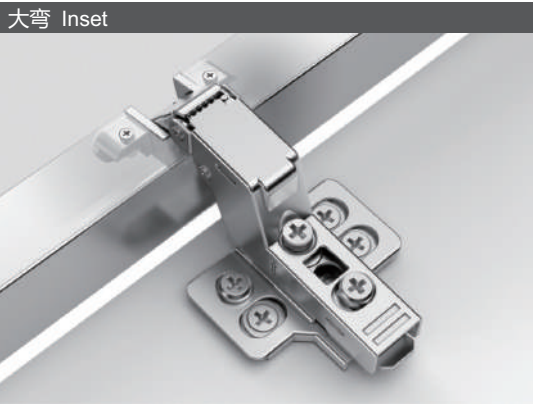


- 镍色 AJ0821+C20H0I
- 黑钛色 AJ0821+C20H0I(TG)



C=18 H=-20+P+A

A	H	P	19	20	21	22	23
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

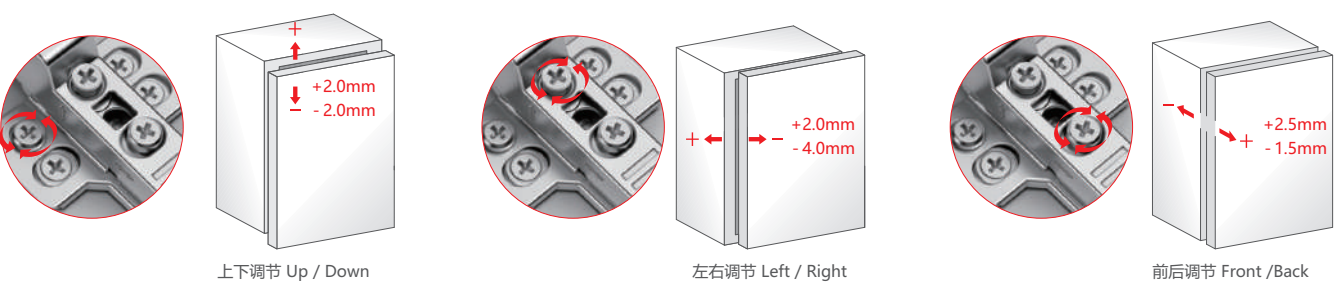

卡式二维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft close hinge (2D)



AJ08

产品介绍 Product Introduction

- 开启角度: 105°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H




铰链切割量 Hinge Coverage Table

A(min) P T	16	17	18	19	20	21	22	23	24	25
19	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4


门板最小间隙 Minimum Gap Of Door Panels

L(min) P T	16	17	18	19	20	21	22	23	24	25
19	1	1	1	1	1	1	1	1	1	1
20	1	1	1	1	1	1	1	1	1	1
21	1	1	1	1	1	1	1	1	1	1
22	1	1	1	1	1	1	1	1	1	1
23	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8




相关信息 Relevant Information


铝材开槽尺寸 Aluminum frame grooving dimensions

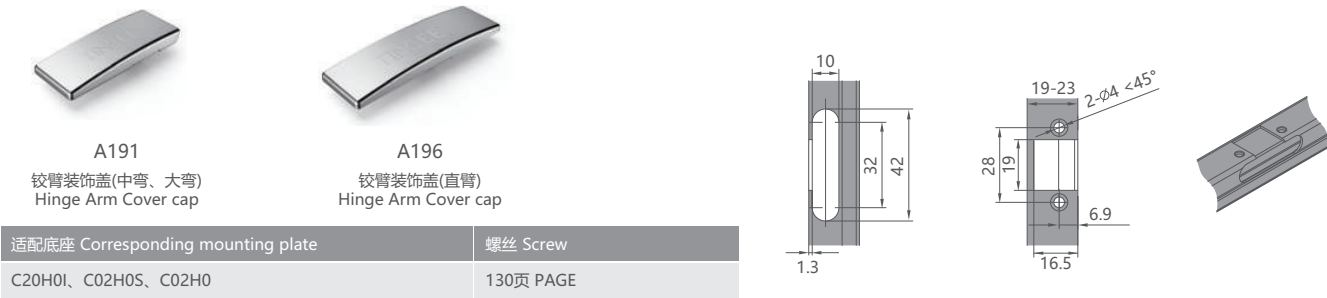

卡式二维铝框三段力缓冲铰链 Three way clip-on aluminum frame soft close hinge (2D)

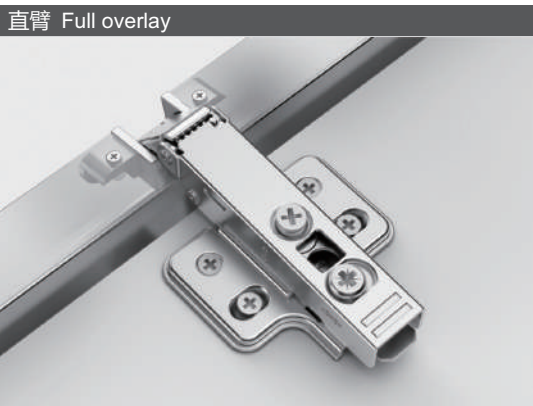


- 镍色 AJ0826+C02H0S
- 黑钛色 AJ0826+C02H0S(TG)




C=0 H=-2+P-D

D H P	19	20	21	22	23
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

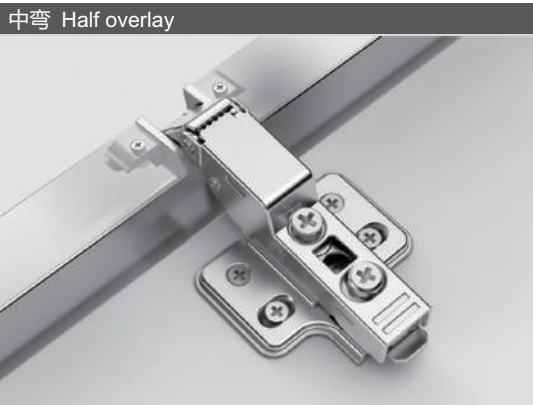


- 镍色 AJ0823+C02H0S
- 黑钛色 AJ0823+C02H0S(TG)




C=9 H=-11+P-D

D H P	19	20	21	22	23
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

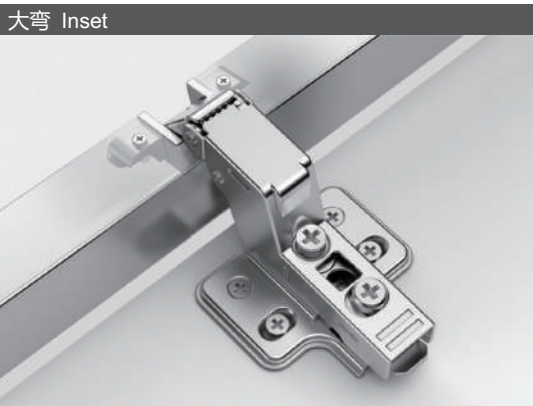


- 镍色 AJ0821+C02H0S
- 黑钛色 AJ0821+C02H0S(TG)



C=18 H=-20+P+A

A H P	19	20	21	22	23
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

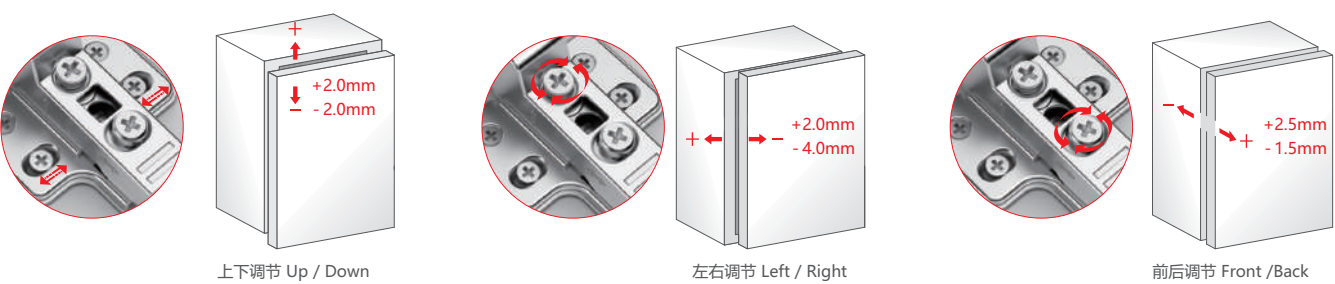

卡式铝框三段力缓冲铰链 Three way clip-on aluminum frame soft close hinge



AJ11

产品介绍 Product Introduction


- 开启角度: 105°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P	T	16	17	18	19	20	21	22	23	24	25
19		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21		0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22		0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23		0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) P	T	16	17	18	19	20	21	22	23	24	25
19		1	1	1	1	1	1	1	1	1	1
20		1	1	1	1	1	1	1	1	1	1
21		1	1	1	1	1	1	1	1	1	1
22		1	1	1	1	1	1	1	1	1	1
23		1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8




相关信息 Relevant Information

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C20H0I、C02H0S、C02H0	130页 PAGE

铝材开槽尺寸 Aluminum frame grooving dimensions

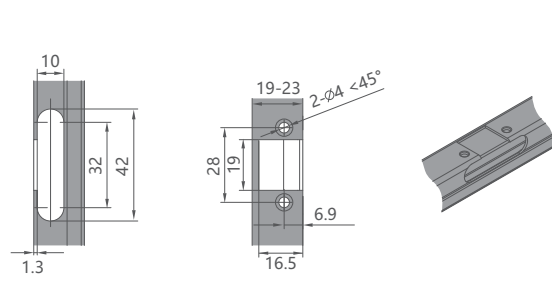

卡式铝框三段力缓冲铰链 Three way clip-on aluminum frame soft close hinge

直臂 Full overlay

■ 镍色 AJ1126+C02H0S
■ 黑钛色 AJ1126+C02H0S(TG)

C=0 H=-2+P-D

D	H	P	19	20	21	22	23
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17

中弯 Half overlay

■ 镍色 AJ1123+C02H0S
■ 黑钛色 AJ1123+C02H0S(TG)

C=9 H=-11+P-D

D	H	P	19	20	21	22	23
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8


大弯 Inset

■ 镍色 AJ1121+C02H0S
■ 黑钛色 AJ1121+C02H0S(TG)

C=18 H=-20+P+A

A	H	P	19	20	21	22	23
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

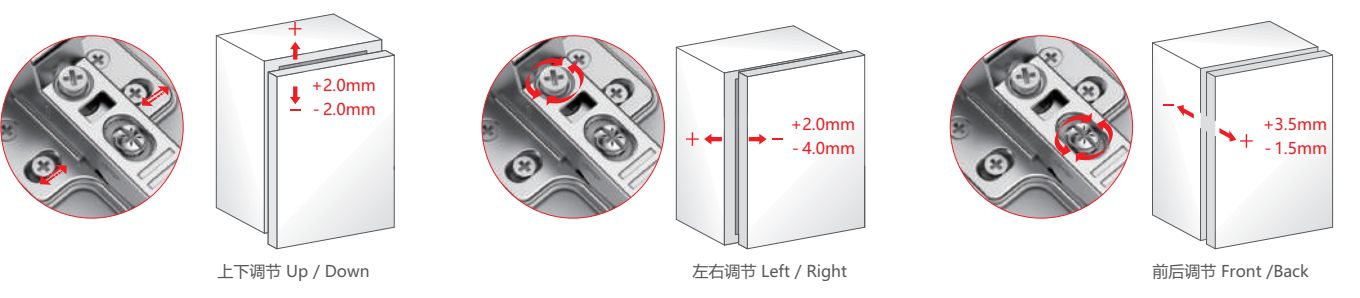

固装铝框三段力缓冲铰链 Three way fixed mounting plate soft close hinge



AJ38

产品介绍 Product Introduction

- 开启角度: 105°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H




铰链切割量 Hinge Coverage Table

A(min) P T	16	17	18	19	20	21	22	23	24	25
19	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20	0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21	0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22	0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23	0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4


门板最小间隙 Minimum Gap Of Door Panels

L(min) P T	16	17	18	19	20	21	22	23	24	25
19	1	1	1	1	1	1	1	1	1	1
20	1	1	1	1	1	1	1	1	1	1
21	1	1	1	1	1	1	1	1	1	1
22	1	1	1	1	1	1	1	1	1	1
23	1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8




相关信息 Relevant Information


铝材开槽尺寸 Aluminum frame grooving dimensions

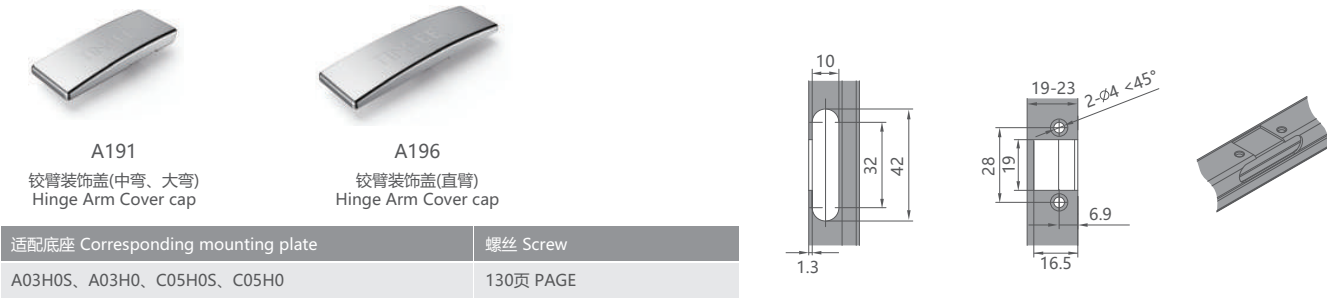

固装铝框三段力缓冲铰链 Three way fixed mounting plate soft close hinge

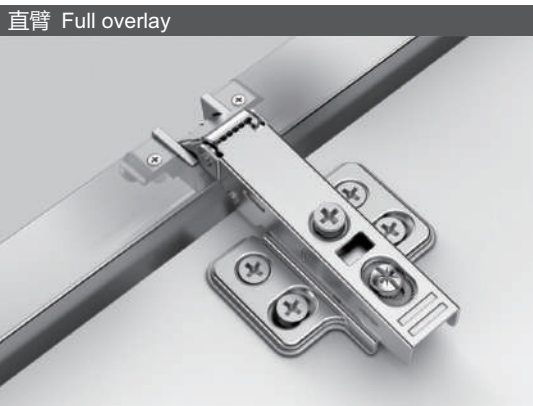

- 镍色 AJ3826+C05H0S
- 黑钛色 AJ3826+C05H0S(TG)




C=0 H=-2+P-D

D H P	19	20	21	22	23
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17




- 镍色 AJ3823+C05H0S
- 黑钛色 AJ3823+C05H0S(TG)




C=9 H=-11+P-D

D H P	19	20	21	22	23
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

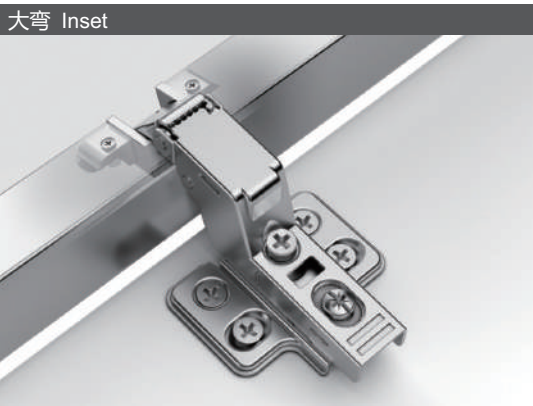


- 镍色 AJ3821+C05H0S
- 黑钛色 AJ3821+C05H0S(TG)



C=18 H=-20+P+A

A H P	19	20	21	22	23
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

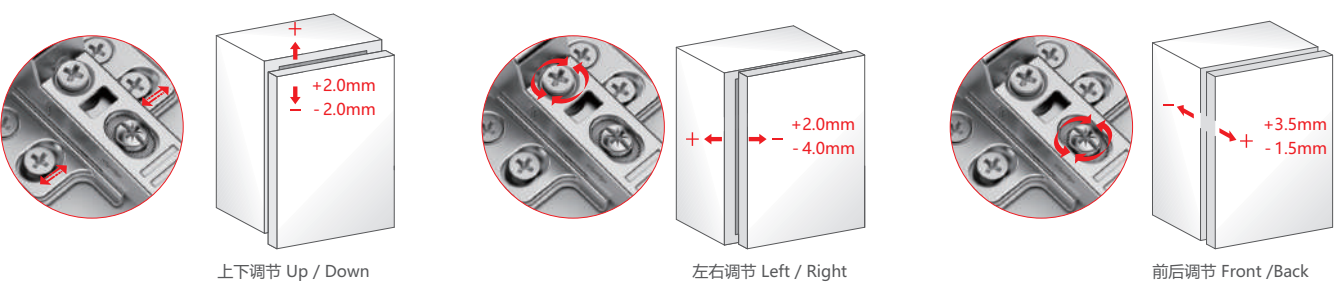



3D CLIP-ON SPECIAL ANGLE HINGE SERIES

卡式三维特殊角度铰链系列

Special angle hinge (3D)
三维特殊角度铰链

安装便捷，柜内空间能更大利用
It is easy to install, and the space in the cabinet can be used more



卡式三维三段力缓冲角度铰链 Three way clip-on soft close angle hinge (3D)



AJ12

产品介绍 Product Introduction

- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H


相关信息 Relevant Information

C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C12H0S、C02H0S、C02H0、C20H0I	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

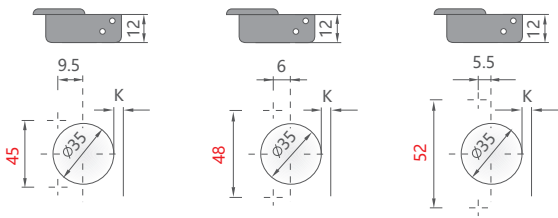

门板调节 Door Panel Adjustment

上下调节 Up / Down


左右调节 Left / Right

前后调节 Front / Back

卡式三维三段力缓冲角度铰链 Three way clip-on soft close angle hinge (3D)




- 镍色 AJ1223+C20H0I
- 黑钛色 AJ1223+C20H0I(TG)



D	H	K	4	5
0	37	2.0	36	2.0
2	37	0	36	0
4	37	-2	36	-2
	X			D




- 镍色 AJ1222+C20H0I
- 黑钛色 AJ1222+C20H0I(TG)



D	H	K	4	5	6	7
0	37	4.5	36	5.4	35	6.3
2	37	2.5	36	3.4	35	4.3
4	37	0.5	36	1.4	35	2.3
	X					D



- 镍色 AJ1221+C20H0I
- 黑钛色 AJ1221+C20H0I(TG)



D	H	K	4	5	6	7
0	37	2.5	36	3.4	35	4.3
2	37	0.5	36	1.4	35	2.3
4	37	-1.5	36	1.6	35	0.3
	X					D

卡式三段力缓冲角度铰链 Three way clip-on soft close angle hinge



AJ13

产品介绍 Product Introduction

- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H


相关信息 Relevant Information

铰杯尺寸 Hinge Cup Dimensions

C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C12H0S、C02H0S、C02H0、C20H0I	130页 PAGE

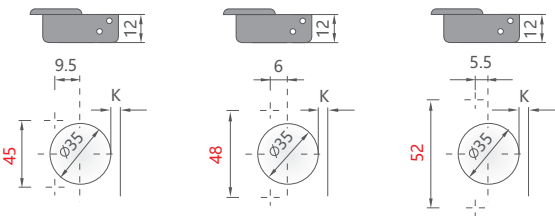

门板调节 Door Panel Adjustment

上下调节 Up / Down


左右调节 Left / Right

前后调节 Front / Back

卡式三段力缓冲角度铰链 Three way clip-on soft close angle hinge




- 镍色 AJ1323+C12H0S
- 黑钛色 AJ1323+C12H0S(TG)



D	H	K	4	5
0	37	2.0	36	2.0
2	37	0	36	0
4	37	-2	36	-2
	X			D




- 镍色 AJ1322+C02H0S
- 黑钛色 AJ1322+C02H0S(TG)



D	H	K	4	5	6	7
0	37	4.5	36	5.4	35	6.3
2	37	2.5	36	3.4	35	4.3
4	37	0.5	36	1.4	35	2.3
	X					D



- 镍色 AJ1321+C02H0S
- 黑钛色 AJ1321+C02H0S(TG)



D	H	K	4	5	6	7
0	37	2.5	36	3.4	35	4.3
2	37	0.5	36	1.4	35	2.3
4	37	-1.5	36	1.6	35	0.3
	X					D

卡式角度铰链 Clip-on unsprung angle hinge



T1304

产品介绍 Product Introduction


- 开启角度: 55°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 55°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H



卡式角度铰链 Clip-on unsprung angle hinge



- 镍色 T1304+C02H0S
- 黑钛色 T1304+C02H0S(TG)



D	H	K	4	5
0	37	20	2.0	19 2.0
2	37	20	0	19 0
4	37	20	-2	19 -2
	X			D


相关信息 Relevant Information

铰杯尺寸 Hinge Cup Dimensions


C03
铰杯装饰盖
Hinge Cup Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C02H0S、C02H0	130页 PAGE

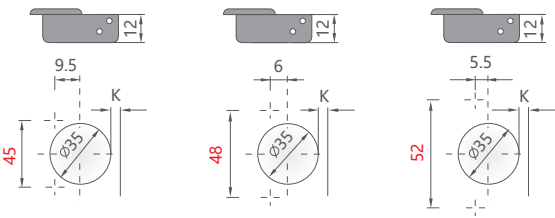

门板调节 Door Panel Adjustment

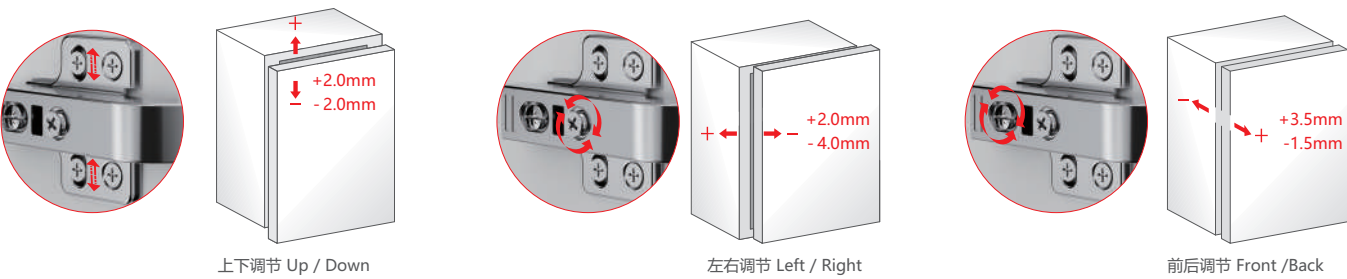



155 DEGREES TWO WAY SOFT CLOSE HINGE SERIES


155度二段力缓冲铰链系列

Large angle design 大角度设计

角度全开，空间更大、更开阔，取放物品不局限
The cabinet door can be open in wider angle, allowing larger space and brighter view inside.
The access and palcement of items are limitless.



155° 卡式三维二段力缓冲铰链 Two way 155° clip-on soft close hinge (3D)

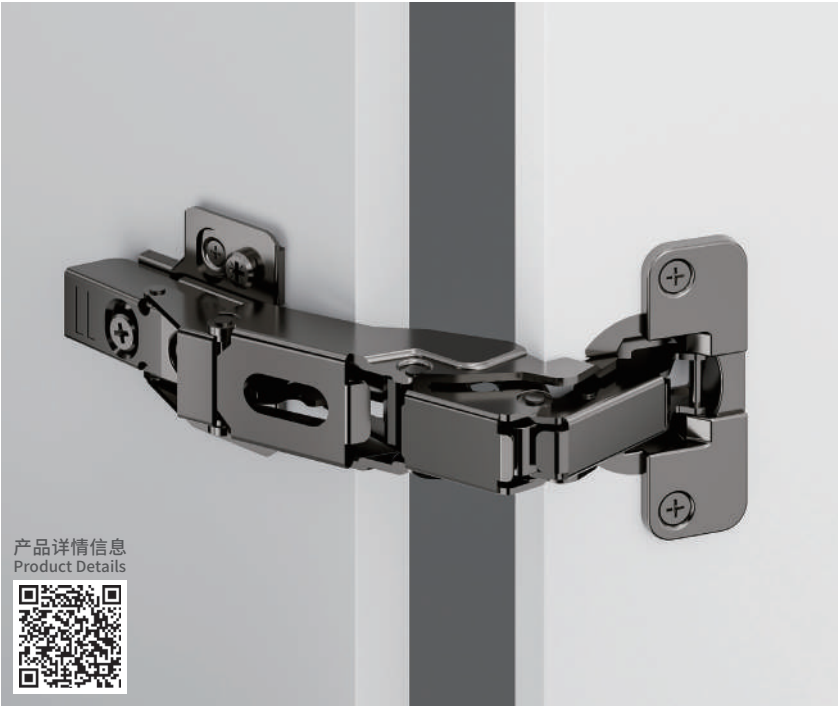

A29

产品介绍 Product Introduction


- 开启角度: 155°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-28mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 155°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-28mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0	0	0	0	0	0	0	0	0.2	0.6
4		0	0	0	0	0	0	0	0	0	0.2	0.6
5		0	0	0	0	0	0	0	0	0	0.3	0.7
6		0	0	0	0	0	0	0	0	0	0.4	1.0
7		0	0	0	0	0	0	0	0	0.05	0.5	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1	1	1	1	1	1	1	1

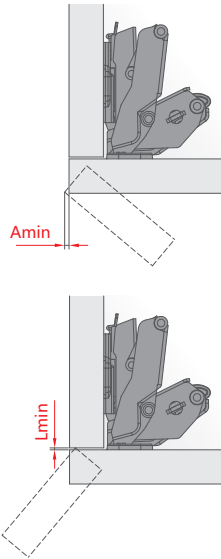


相关信息 Relevant Information




适配底座 Corresponding mounting plate	螺丝 Screw
C20H0I、C02H0S、C02H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

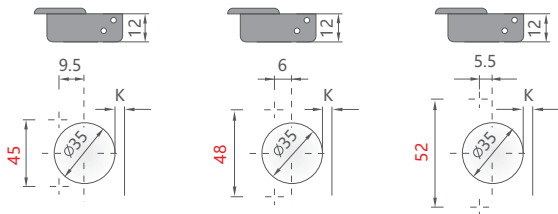

155° 卡式三维二段力缓冲铰链 Two way 155° clip-on soft close hinge (3D)

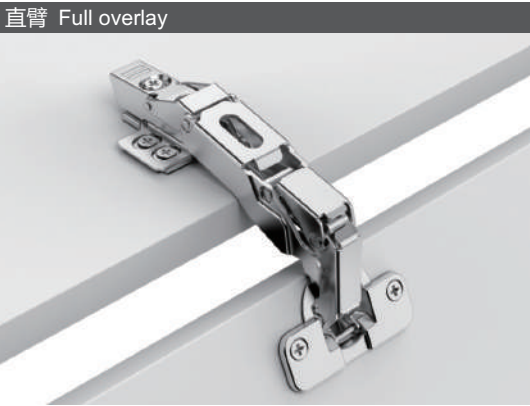


- 镍色 A2906+C20H0I
- 黑钛色 A2906+C20H0I(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	16	17	18	19	20		
4	14	15	16	17	18		

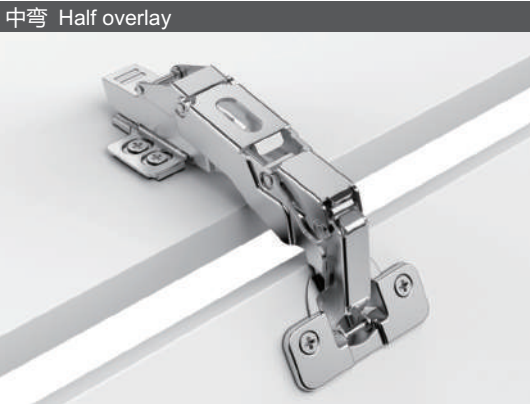


- 镍色 A2903+C20H0I
- 黑钛色 A2903+C20H0I(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

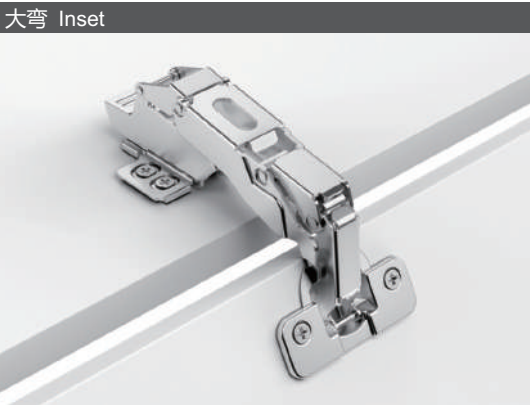


- 镍色 A2901+C20H0I
- 黑钛色 A2901+C20H0I(TG)




C=18 H=-4+K+A

A	H	K	19	20	21	22	23
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

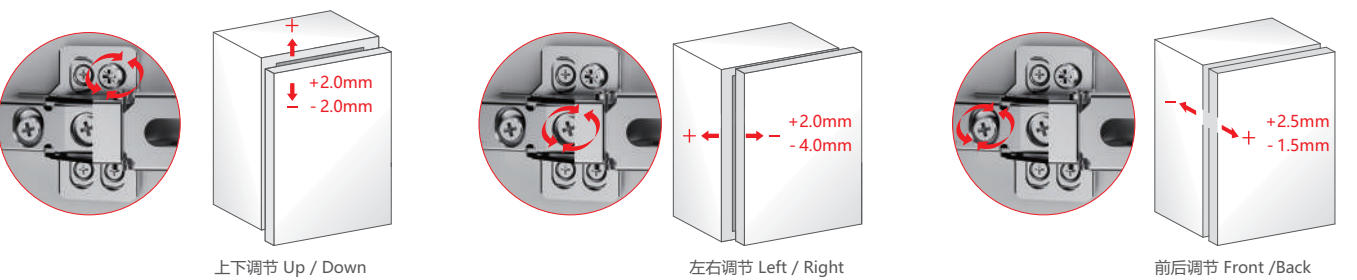

155° 滑入式二段力缓冲铰链 Two way 155° slide-on soft close hinge

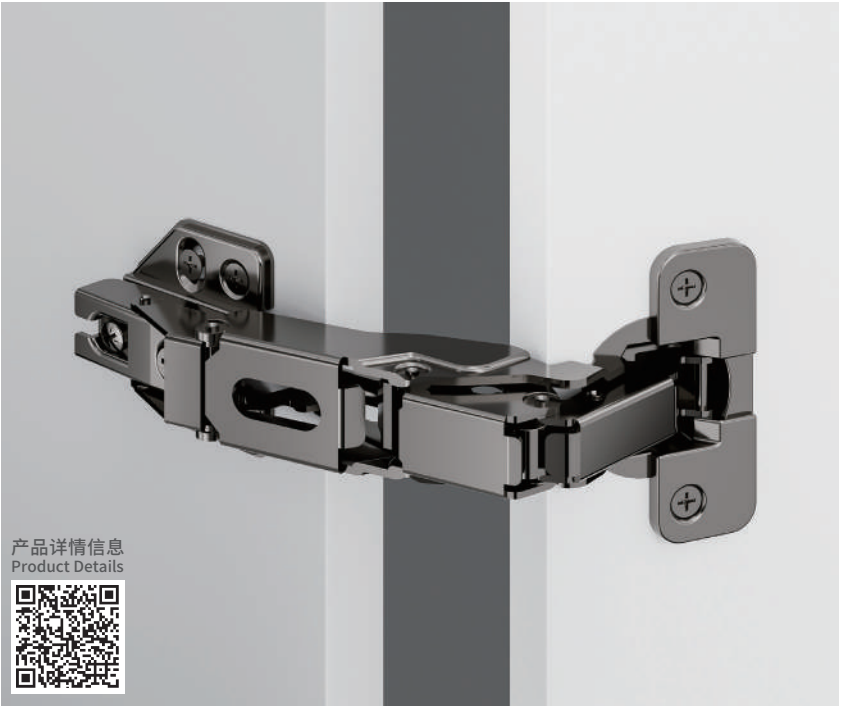

A31

产品介绍 Product Introduction


- 开启角度: 155°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-28mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 155°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-28mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		0	0	0	0	0	0	0	0	0	0.2	0.6
4		0	0	0	0	0	0	0	0	0	0.2	0.6
5		0	0	0	0	0	0	0	0	0	0.3	0.7
6		0	0	0	0	0	0	0	0	0	0.4	1.0
7		0	0	0	0	0	0	0	0	0.05	0.5	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22	23	24	25
3		1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1	1	1	1	1	1	1	1

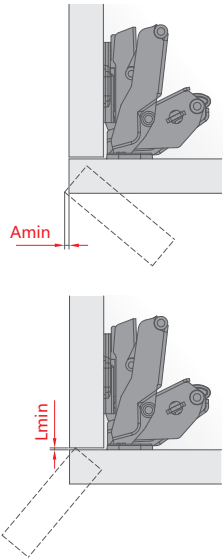


相关信息 Relevant Information




适配底座 Corresponding mounting plate	螺丝 Screw
A03H0S、A03H0、C05H0S、C05H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

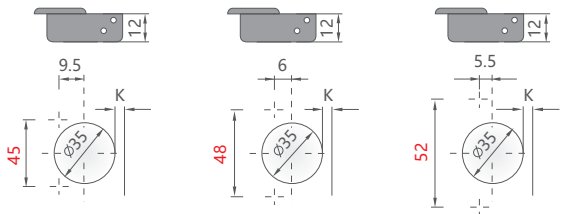

155° 滑入式二段力缓冲铰链 Two way 155° slide-on soft close hinge

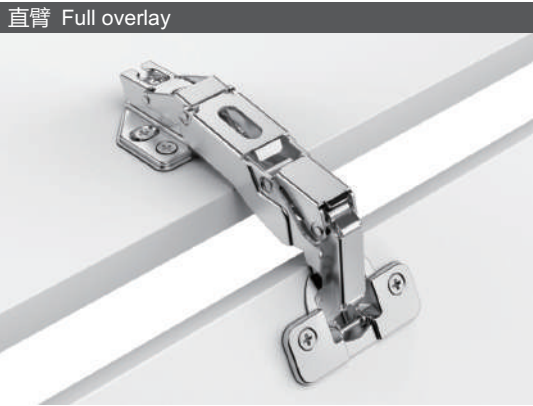


- 镍色 A3106+A03H0S
- 黑钛色 A3106+A03H0S(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0			17	18	19	20	21
2			16	17	18	19	20
4			14	15	16	17	18

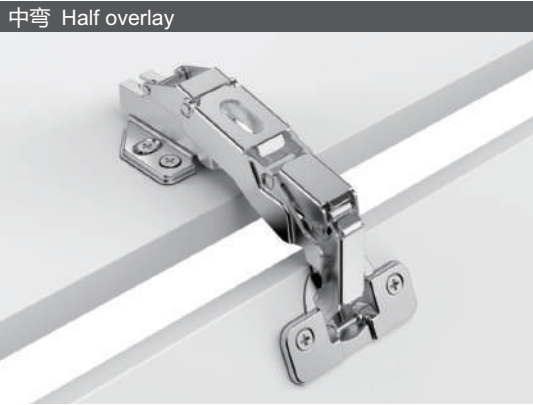


- 镍色 A3103+A03H0S
- 黑钛色 A3103+A03H0S(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8

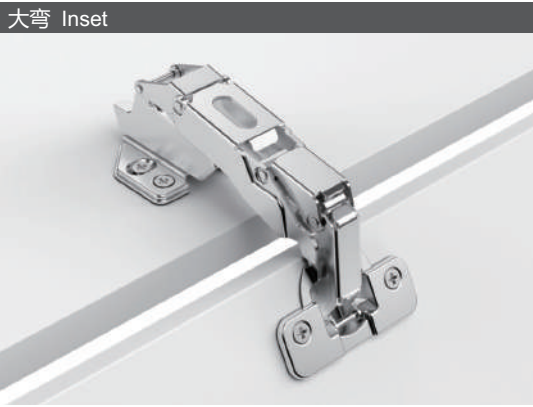


- 镍色 A3101+A03H0S
- 黑钛色 A3101+A03H0S(TG)




C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

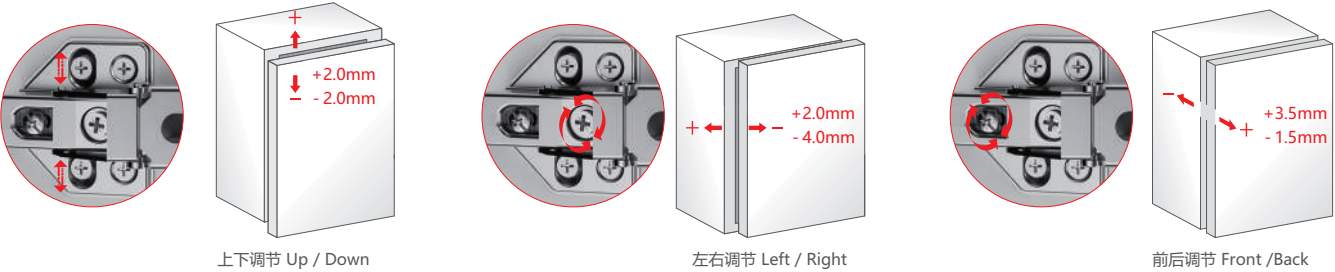

125度二段力缓冲铰链系列 Two way 125 degrees sofe close hinges series

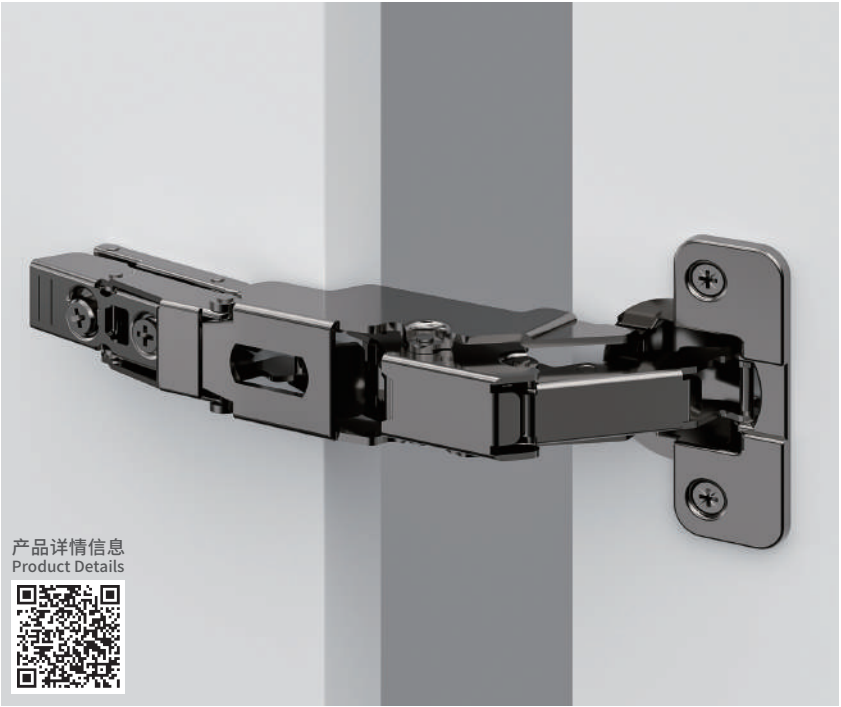

A26

产品介绍 Product Introduction


- 开启角度：105°
- 开孔尺寸：35mm
- 铰杯深度：12mm
- 铰杯孔距：45/9.5、48/6、52/5.5
- 开孔距离：3-10mm
- 适用门板：16-40mm
- 盐雾测试：48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-10mm
- Range for door thickness: 16-40mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
3		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0.8	0
4		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0.8	0.6	-0.2
5		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0.6	0	-0.4
6		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0.9	0.5	-0.1	-0.6
7		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0.8	0.2	-0.2	-0.8

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
3		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1.2
4		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1.3
5		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1.2
6		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1.5
7		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2.0

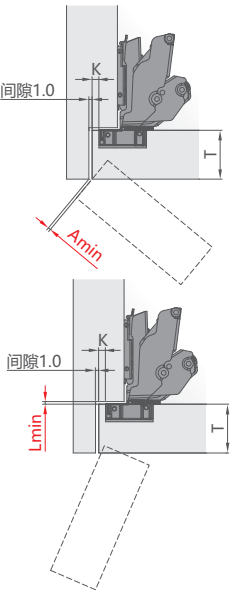


相关信息 Relevant Information




适配底座 Corresponding mounting plate	螺丝 Screw
C21H0I、C20H0I、C02H0S、C02H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

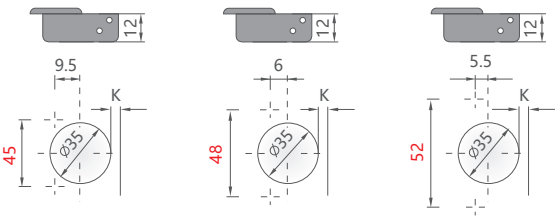

125度二段力缓冲铰链系列 Two way 125 degrees sofe close hinges series

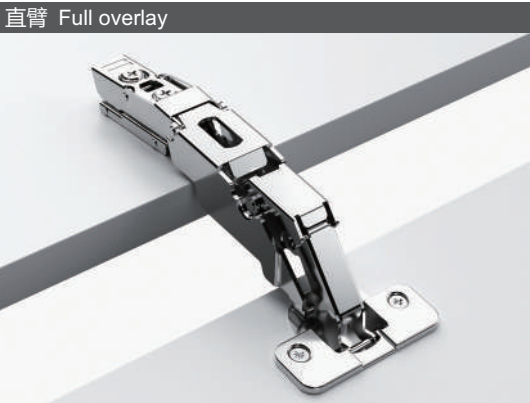


- 镍色 A2606+C21H0I
- 黑钛色 A2606+C21H0I(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7	8	9	10
0			17	18	19	20	21	22	23	24
2			15	16	17	18	19	20	21	22
4			13	14	15	16	17	18	19	20
6			11	12	13	14	15	16	17	18
8			9	10	11	12	13	14	15	16

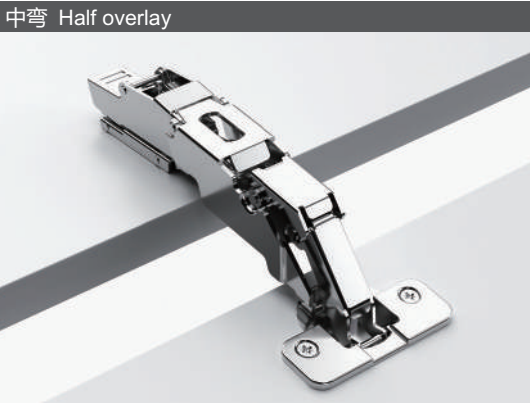


- 镍色 A2603+C21H0I
- 黑钛色 A2603+C21H0I(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7	8	9	10
0			8	9	10	11	12	13	14	15
2			6	7	8	9	10	11	12	13
4			4	5	6	7	8	9	10	11
6			2	3	4	5	6	7	8	9
8			0	1	2	3	4	5	6	7

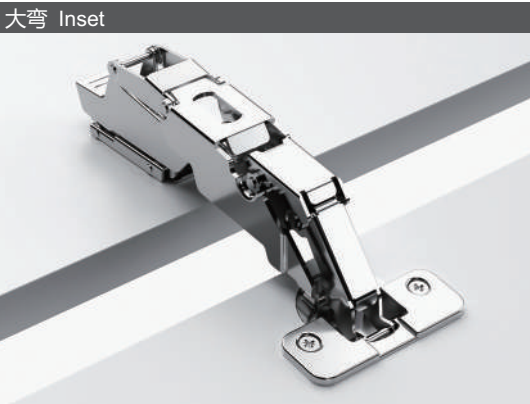


- 镍色 A2601+C21H0I
- 黑钛色 A2601+C21H0I(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7	8	9	10
0			1	0	-1	-2	-3	-4	-5	-6
2			3	2	1	0	-1	-2	-3	-4
4			5	4	3	2	1	0	-1	-2
6			7	6	5	4	3	2	1	0
8			9	8	7	6	5	4	3	2

门板调节 Door Panel Adjustment

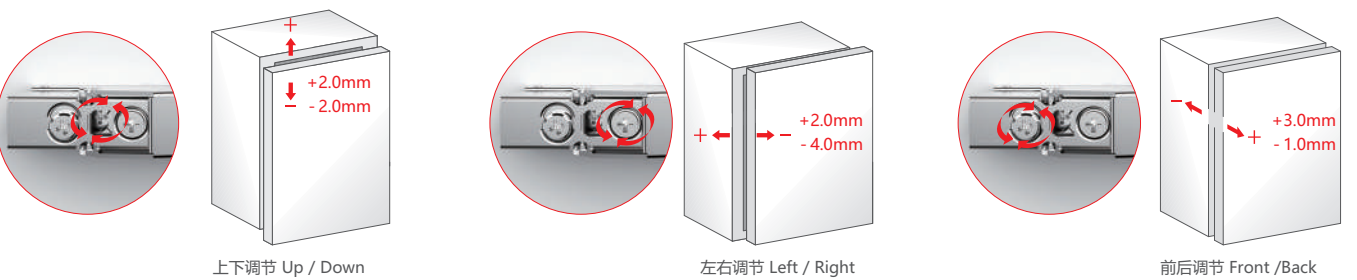

40杯三维厚门一段力缓冲铰链 40mm thick door soft close hinge (3D)



A25

产品介绍 Product Introduction


- 开启角度: 95°
- 开孔尺寸: 40mm
- 铰杯深度: 12.8mm
- 铰杯孔距: 52/5.5
- 开孔距离: 3-15mm
- 适用门板: 16-40mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 95°
- Hinge cup diameter: 40mm
- Drilling depth: 12.8mm
- Hinge Cup Drill Patterns: 52/5.5
- Drilling distance from door edge to cup edge: 3-15mm
- Range for door thickness: 16-40mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
		3	0	0.1	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.5	3.5	4.4	5.4	6.3	7.3	8.3	9.3	10.2	11.2	12.2	13.2
4	0	0.1	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.0	2.9	3.8	4.7	5.6	6.6	7.6	8.5	9.5	10.4	11.4	12.4	13.3	
5	0	0.1	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.0	2.3	3.3	4.2	5.1	6.0	6.9	7.8	8.8	9.7	10.7	11.7	12.6	
6	0	0.1	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.3	1.4	1.7	2.0	2.3	2.7	3.5	4.4	5.4	6.3	7.2	8.1	9.1	10	11	11.9	
7	0	0.1	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.3	1.4	1.7	2.0	2.2	2.6	3.1	4.0	4.8	5.7	6.6	7.5	8.4	9.3	10.3	11.2	

门板最小间隙 Minimum Gap Of Door Panels


L(min) K	T	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
3		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
6		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
7		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

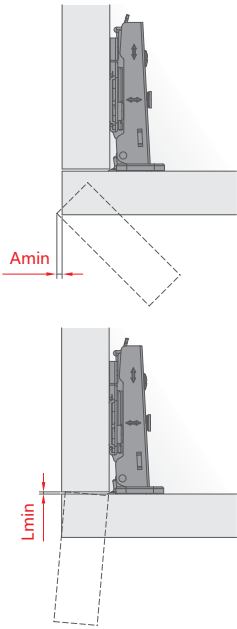


相关信息 Relevant Information




铰杯尺寸 Hinge Cup Dimensions

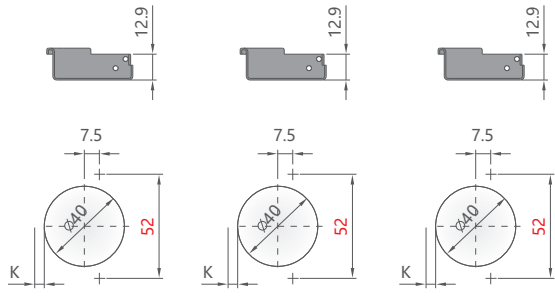

40杯三维厚门一段力缓冲铰链 40mm thick door soft close hinge (3D)

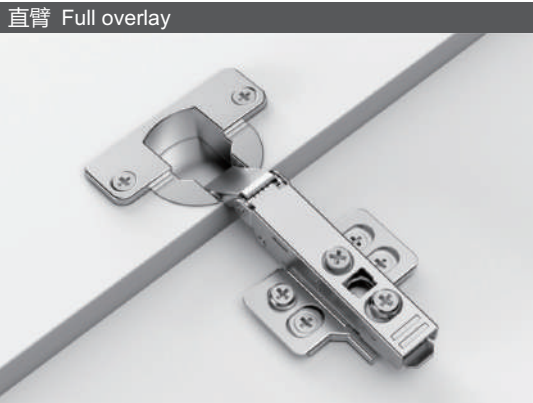


- 镍色 A2516+C02H0S
- 黑钛色 A2516+C02H0S(TG)




C=0 H=19+K-D

D	H	K	3	4	5	6	7
0	22	23	24	25	26		
2	20	21	22	23	24		
4	18	19	20	21	22		

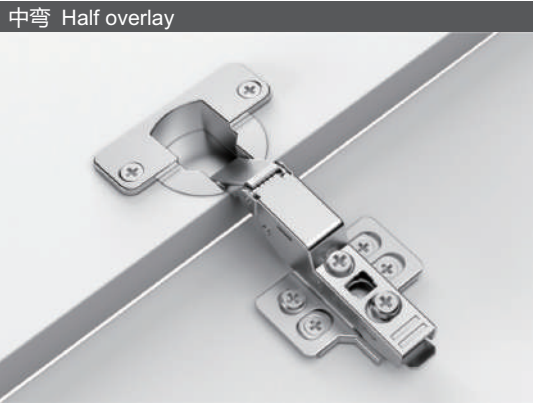


- 镍色 A2513+C02H0S
- 黑钛色 A2513+C02H0S(TG)




C=9 H=10+K-D

D	H	K	3	4	5	6	7
0	13	14	15	16	17		
2	11	12	13	14	15		
4	9	10	11	12	13		

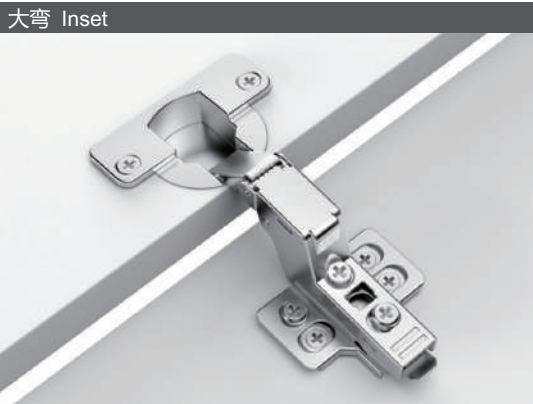


- 镍色 A2511+C02H0S
- 黑钛色 A2511+C02H0S(TG)



C=18 H=1+K+A

A	H	K	3	4	5	6	7
0	-4	-5	-6	-7	-8		
2	-2	-3	-4	-5	-6		
4	0	-1	-2	-3	-4		

门板调节 Door Panel Adjustment

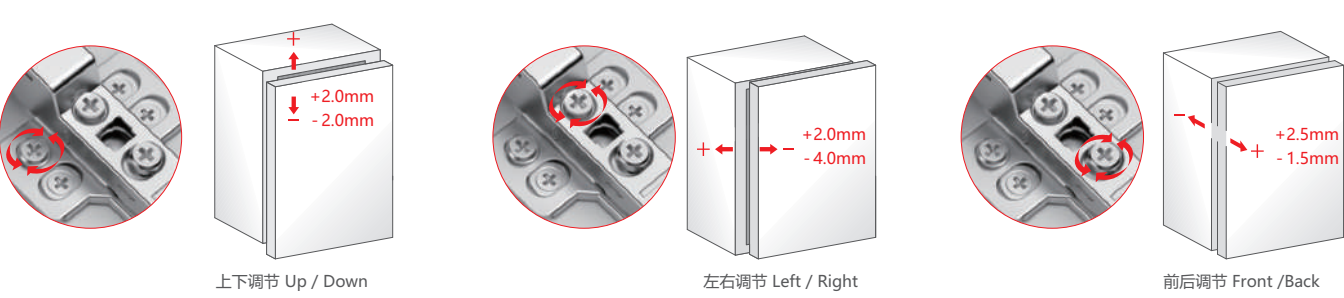

卡式迷你一段力缓冲铰链 One way 26mm mini clip-on soft close hinge



A071

产品介绍 Product Introduction


- 开启角度: 95°
- 开孔尺寸: 26mm
- 铰杯深度: 9.6mm
- 铰杯孔距: 32mm、36mm、38mm
- 开孔距离: 3-5mm
- 适用门板: 12-20mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 95°
- Hinge cup diameter: 26mm
- Drilling depth: 9.6mm
- Hinge Cup Drill Patterns: 32mm、36mm、38mm
- Drilling distance from door edge to cup edge: 3-5mm
- Range for door thickness: 12-20mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K T	12	13	14	15	16	17	18	19	20
3	0.2	0.4	0.6	0.9	1.3	2.0	2.7	3.5	4.4
4	0.2	0.4	0.6	0.9	1.3	1.7	2.4	3.2	4.0
5	0.2	0.4	0.6	0.8	1.2	1.6	2.1	2.8	3.6

门板最小间隙 Minimum Gap Of Door Panels

L(min) K T	12	13	14	15	16	17	18	19	20
3	1	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1	1
5	1	1	1	1	1	1	1	1	1

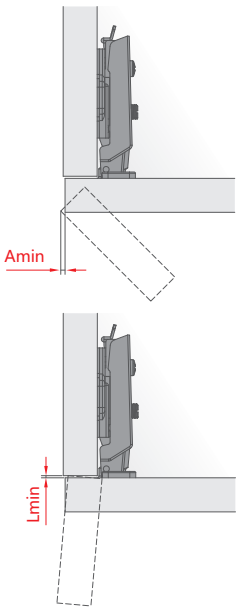

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap


A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C02H0S、C02H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

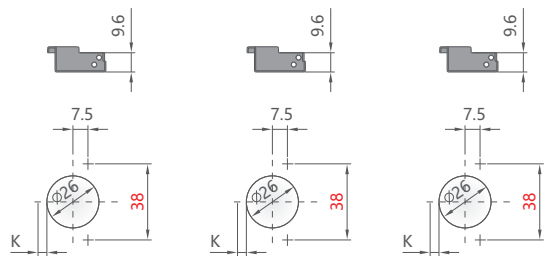


卡式迷你一段力缓冲铰链 One way 26mm mini clip-on soft close hinge

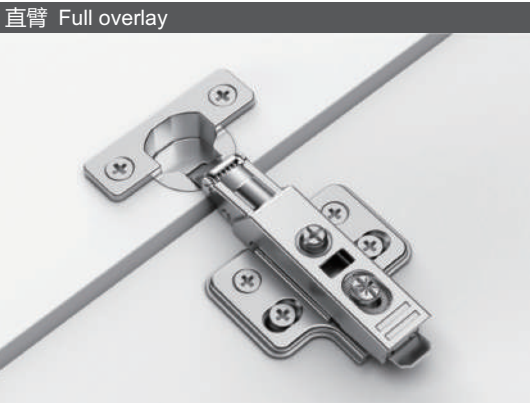


直臂 Full overlay

- 镍色 A0716+C02H0S
- 黑钛色 A0716+C02H0S(TG)




D H K	3	4	5
0	14	15	16
2	12	13	14
4	10	11	12

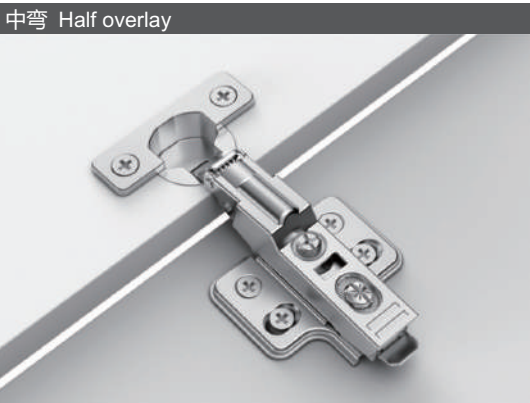


中弯 Half overlay

- 镍色 A0713+C02H0S
- 黑钛色 A0713+C02H0S(TG)




D H K	3	4	5
0	6	7	8
2	4	5	6
4	2	3	4

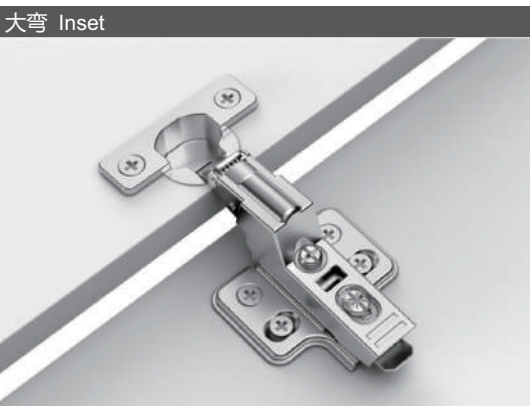

大弯 Inset

- 镍色 A0711+C02H0S
- 黑钛色 A0711+C02H0S(TG)



A H K	3	4	5
0	-1	0	-1
2	-3	-2	-1
4	-5	-4	-3

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

卡式玻璃一段力缓冲铰链 One way 26mm clip-on glass door soft close hinge



A0721

产品介绍 Product Introduction


- 开启角度: 95°
- 开孔尺寸: 26mm
- 铰杯深度: 9mm
- 铰杯孔距: 22mm
- 开孔距离: 3-6mm
- 适用门板: 4-6mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 95°
- Hinge cup diameter: 26mm
- Drilling depth: 9mm
- Hinge Cup Drill Patterns: 22mm
- Drilling distance from door edge to cup edge: 3-6mm
- Range for door thickness: 4-6mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	12	13	14	15	16	17	18	19	20
3		0.2	0.4	0.6	0.9	1.3	2.0	2.7	3.5	4.4
4		0.2	0.4	0.6	0.9	1.3	1.7	2.4	3.2	4.0
5		0.2	0.4	0.6	0.8	1.2	1.6	2.1	2.8	3.6

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	12	13	14	15	16	17	18	19	20
3		1	1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1	1	1
5		1	1	1	1	1	1	1	1	1

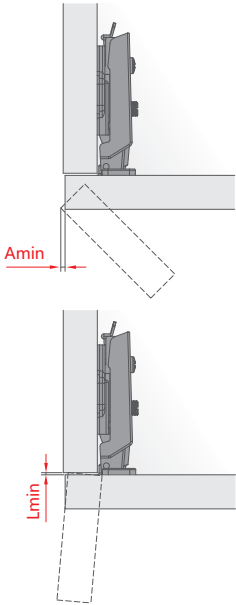


相关信息 Relevant Information

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C02H0S、C02H0	130页 PAGE


铰杯尺寸 Hinge Cup Dimensions

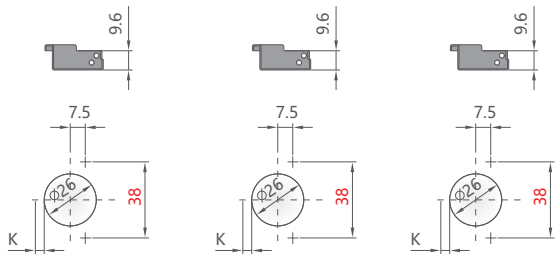

卡式玻璃一段力缓冲铰链 One way 26mm clip-on glass door soft close hinge




- 镍色 A07216+C02H0S
- 黑钛色 A07216+C02H0S(TG)



D	H	K	3	4	5
0			14	15	16
2			12	13	14
4			10	11	12




- 镍色 A07213+C02H0S
- 黑钛色 A07213+C02H0S(TG)



D	H	K	3	4	5
0			6	7	8
2			4	5	6
4			2	3	4




- 镍色 A07211+C02H0S
- 黑钛色 A07211+C02H0S(TG)



A	H	K	3	4	5
0			-1	0	-1
2			-3	-2	-1
4			-5	-4	-3

门板调节 Door Panel Adjustment

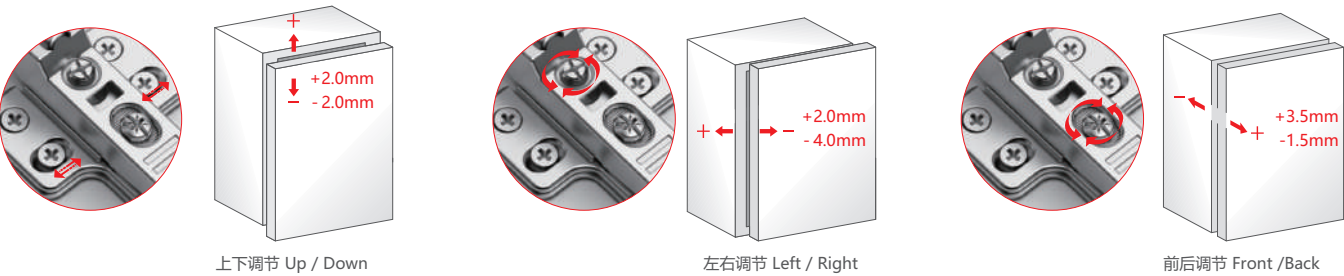

滑入式短臂一段力缓冲角度铰链 One way short arm slide-on soft close hinge




A1813

产品介绍 Product Introduction

- 开启角度: 95°、105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 14-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 95°、105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 14-22mm
- NSS Test Standards: 48H、72H、96H

滑入式短臂一段力缓冲角度铰链 One way short arm slide-on soft close hinge

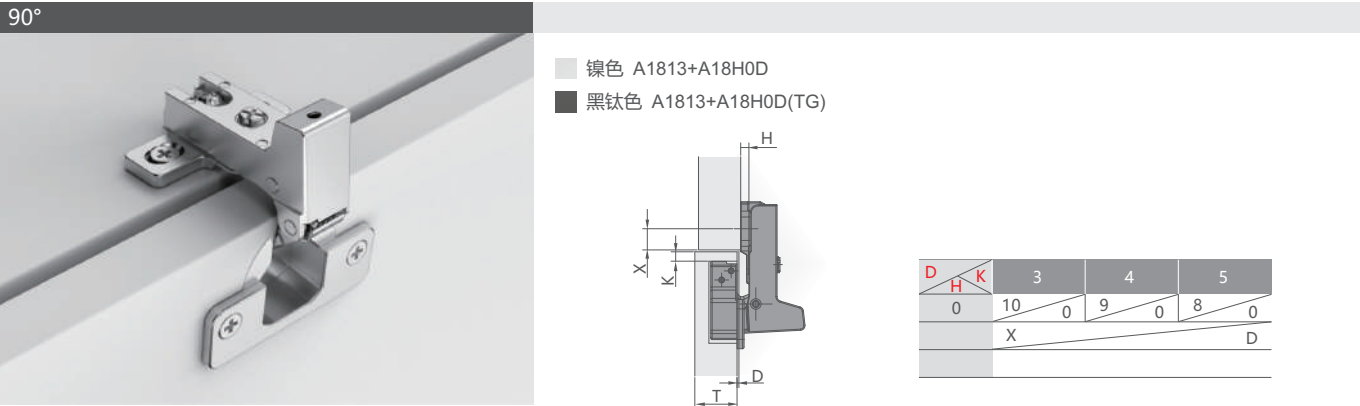


相关信息 Relevant Information

铰杯尺寸 Hinge Cup Dimensions




C03
铰杯装饰盖
Hinge Cup Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
A18H0D	130页 PAGE

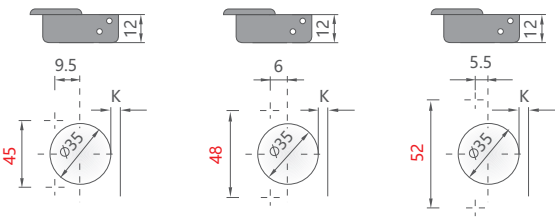

门板调节 Door Panel Adjustment

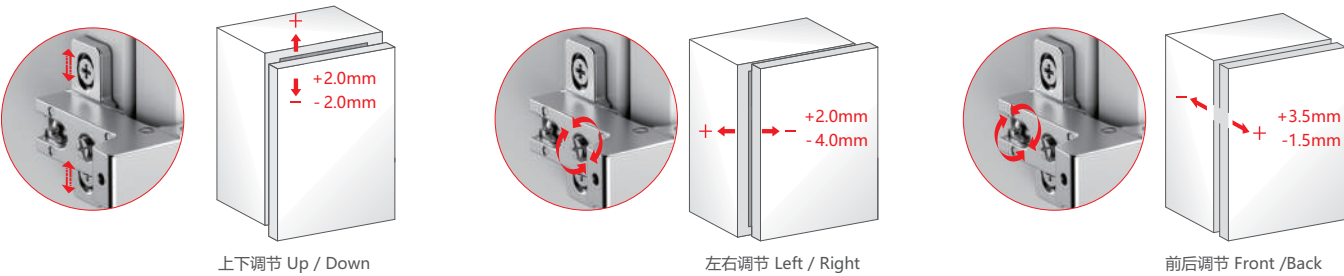

卡式反弹铰链 Clip-on push-open hinge



T043

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	15	16	17	18	19	20	21	22
3		0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4		0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5		0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6		0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7		0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	15	16	17	18	19	20	21	22
3		1	1	1	1	1	1	1	1
4		1	1	1	1	1	1	1.2	1.3
5		1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6		2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7		3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

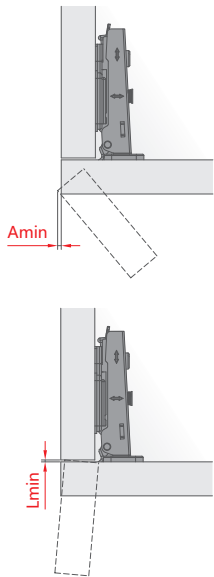

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap


适配底座 Corresponding mounting plate	螺丝 Screw
C02H0S、C02H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

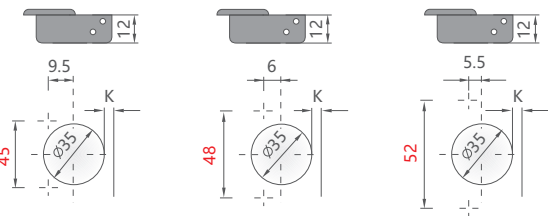


卡式反弹铰链 Clip-on push-open hinge

直臂 Full overlay

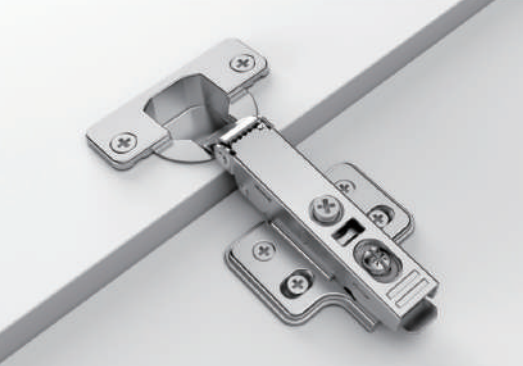


- 镍色 T0436+C02H0S
- 黑钛色 T0436+C02H0S(TG)




C=0 H=14+K-D

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

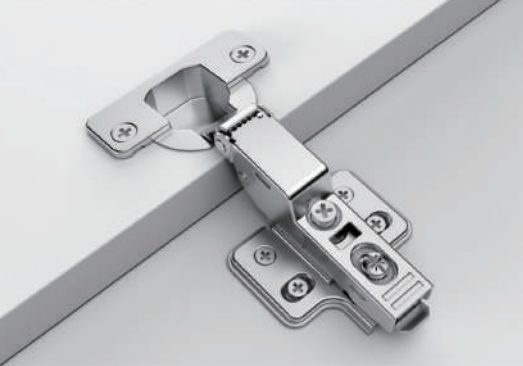


- 镍色 T0433+C02H0S
- 黑钛色 T0433+C02H0S(TG)




C=9 H=5+K-D

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		

大弯 Inset

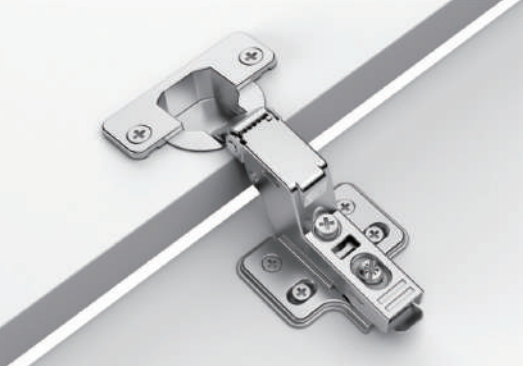

- 镍色 T0431+C02H0S
- 黑钛色 T0431+C02H0S(TG)



C=18 H=-4+K+A

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

上下调节 Up / Down

左右调节 Left / Right

前后调节 Front / Back

卡式二维铝框无力铰链 Clip-on aluminum frame unsprung hinge (2D)



LT080

产品介绍 Product Introduction


- 开启角度: 105°
- 安装孔距: 28mm
- 铝材开槽尺寸: 10x42mm & 16.5x19mm (见下方示意图)
- 铝材宽度: 19-23mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge Cup Drill Patterns: 28mm
- Grooving width: 10x42mm & 16.5x19mm(as diagram below)
- Width of aluminum: 19-23mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) P	T	16	17	18	19	20	21	22	23	24	25
19		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.65	2.5
20		0.05	0.15	0.25	0.35	0.5	0.65	0.85	1.05	1.25	2.0
21		0.05	0.15	0.25	0.35	0.45	0.6	0.8	1.0	1.2	1.5
22		0.05	0.15	0.25	0.35	0.45	0.6	0.75	1.0	1.2	1.45
23		0.05	0.15	0.25	0.35	0.45	0.6	0.75	0.95	1.15	1.4

门板最小间隙 Minimum Gap Of Door Panels

L(min) P	T	16	17	18	19	20	21	22	23	24	25
19		1	1	1	1	1	1	1	1	1	1
20		1	1	1	1	1	1	1	1	1	1
21		1	1	1	1	1	1	1	1	1	1
22		1	1	1	1	1	1	1	1	1	1
23		1	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8




相关信息 Relevant Information

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C02H0S、C02H0	130页 PAGE

铝材开槽尺寸 Aluminum frame grooving dimensions

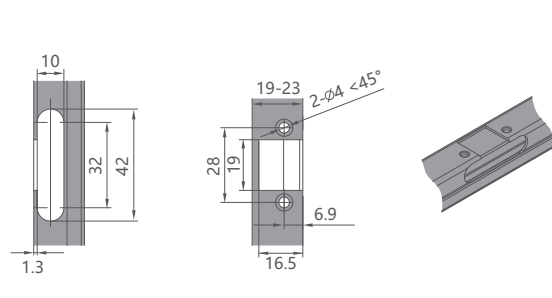

卡式二维铝框无力铰链 Clip-on aluminum frame unsprung hinge (2D)

直臂 Full overlay

■ 镍色 LT0806+C02H0S
■ 黑钛色 LT0806+C02H0S(TG)

C=0 H=-2+P-D

D	H	P	19	20	21	22	23
0			17	18	19	20	21
2			15	16	17	18	19
4			13	14	15	16	17

中弯 Half overlay

■ 镍色 LT0803+C02H0S
■ 黑钛色 LT0803+C02H0S(TG)

C=9 H=-11+P-D

D	H	P	19	20	21	22	23
0			8	9	10	11	12
2			6	7	8	9	10
4			4	5	6	7	8


大弯 Inset

■ 镍色 LT0801+C02H0S
■ 黑钛色 LT0801+C02H0S(TG)

C=18 H=-20+P+A

A	H	P	19	20	21	22	23
0			1	0	-1	-2	-3
2			3	2	1	0	-1
4			5	4	3	2	1

门板调节 Door Panel Adjustment

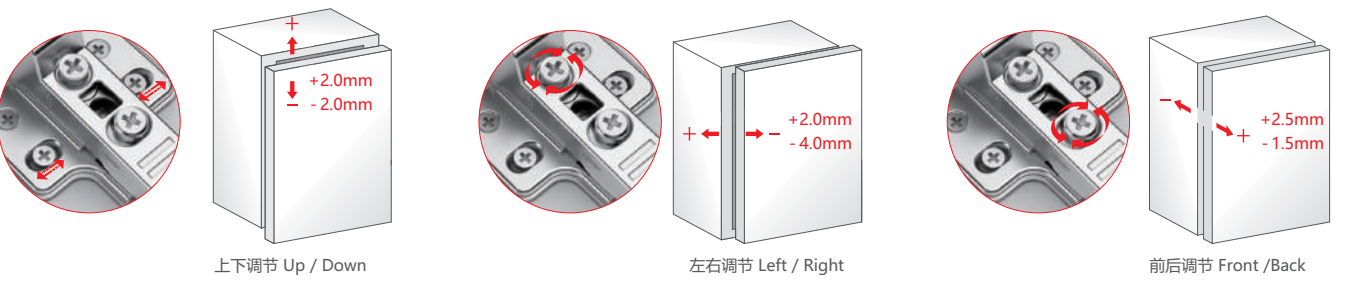

卡式二维浅杯二段力缓冲铰链 Two way clip-on shallow cup soft close hinge(3D)



A1990

产品介绍 Product Introduction


- 开启角度: 100°
- 开孔尺寸: 35mm
- 铰杯深度: 10mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 14-20mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 100°
- Hinge cup diameter: 35mm
- Drilling depth: 10mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 14-20mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K	T	14	15	16	17	18	19	20
3		0.8	1.0	1.4	1.8	2.2	2.7	3.3
4		0.7	1.0	1.3	1.7	2.1	2.6	3.2
5		0.7	0.9	1.3	1.6	2.0	2.5	3.0
6		0.7	0.9	1.2	1.5	1.9	2.4	2.8
7		0.6	0.8	1.2	1.4	1.8	2.3	2.7

门板最小间隙 Minimum Gap Of Door Panels

L(min) K	T	14	15	16	17	18	19	20
3		1	1	1	1	1	1	1
4		1	1	1.3	1.4	1.6	1.7	1.8
5		2.0	2.0	2.4	2.6	2.7	2.9	3.0
6		3.1	3.1	3.4	3.6	3.7	3.8	4.0
7		4.1	4.1	4.4	4.6	4.7	4.9	5.0

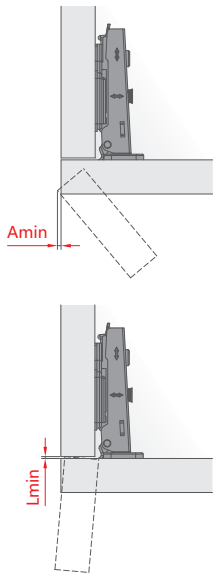

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C02H0S、C02H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

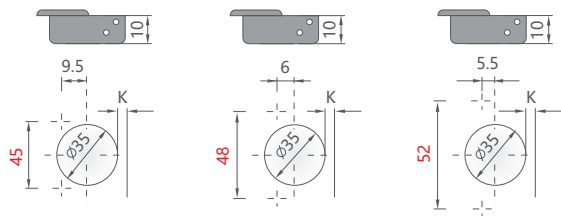

卡式二维浅杯二段力缓冲铰链 Two way clip-on shallow cup soft close hinge(3D)

直臂 Full overlay

■ 镍色 A19906+C02H0S
■ 黑钛色 A19906+C02H0S(TG)

$C=0 \quad H=14+K-D$

D	H	K	3	4	5	6	7
0	17	18	19	20	21		
2	15	16	17	18	19		
4	13	14	15	16	17		

中弯 Half overlay

■ 镍色 A19903+C02H0S
■ 黑钛色 A19903+C02H0S(TG)

$C=9 \quad H=5+K-D$

D	H	K	3	4	5	6	7
0	8	9	10	11	12		
2	6	7	8	9	10		
4	4	5	6	7	8		


大弯 Inset

■ 镍色 A19901+C02H0S
■ 黑钛色 A19901+C02H0S(TG)

$C=18 \quad H=-4+K+A$

A	H	K	3	4	5	6	7
0	1	0	-1	-2	-3		
2	3	2	1	0	-1		
4	5	4	3	2	1		

门板调节 Door Panel Adjustment

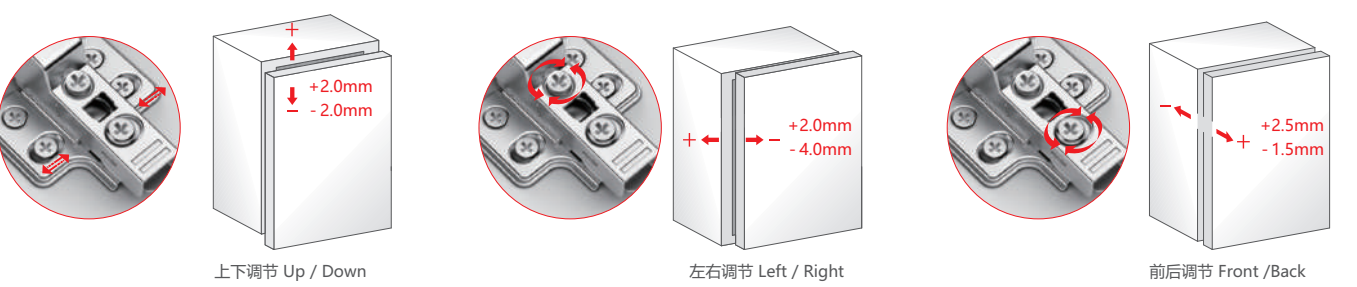

TJ反弹铰链 Push-open hinges



TJ19

产品介绍 Product Introduction


- 开启角度: 105°
- 开孔尺寸: 35mm
- 铰杯深度: 12mm
- 铰杯孔距: 45/9.5、48/6、52/5.5
- 开孔距离: 3-7mm
- 适用门板: 15-22mm
- 盐雾测试: 48H、72H、96H
- Opening angle: 105°
- Hinge cup diameter: 35mm
- Drilling depth: 12mm
- Hinge Cup Drill Patterns: 45/9.5、48/6、52/5.5
- Drilling distance from door edge to cup edge: 3-7mm
- Range for door thickness: 15-22mm
- NSS Test Standards: 48H、72H、96H

铰链切割量 Hinge Coverage Table

A(min) K T	15	16	17	18	19	20	21	22
3	0.4	0.4	0.6	0.8	1.2	1.6	2.2	2.9
4	0.4	0.4	0.6	0.8	1.1	1.5	2.0	2.6
5	0.4	0.4	0.6	0.8	1.1	1.4	1.8	2.4
6	0.4	0.4	0.5	0.7	1.0	1.3	1.7	2.2
7	0.4	0.4	0.5	0.7	1.0	1.3	1.6	2.0

门板最小间隙 Minimum Gap Of Door Panels

L(min) K T	15	16	17	18	19	20	21	22
3	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1.2	1.3
5	1.5	1.5	1.6	1.7	1.9	2.0	2.2	2.3
6	2.5	2.5	2.6	2.8	2.9	3.0	3.2	3.3
7	3.5	3.5	3.6	3.7	3.9	4.0	4.2	4.3

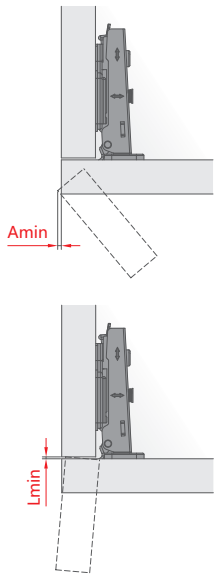

相关信息 Relevant Information


C03
铰杯装饰盖
Hinge Cup Cover cap

A191
铰臂装饰盖(中弯、大弯)
Hinge Arm Cover cap

A196
铰臂装饰盖(直臂)
Hinge Arm Cover cap

适配底座 Corresponding mounting plate	螺丝 Screw
C21H01、C20H01、C02H0S、C02H0	130页 PAGE

铰杯尺寸 Hinge Cup Dimensions

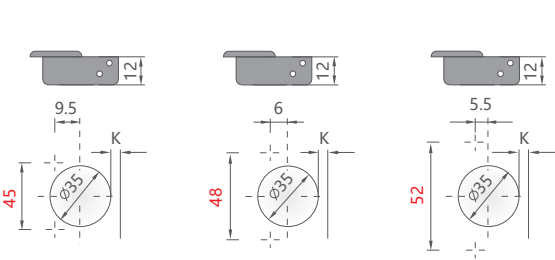

TJ反弹铰链 Push-open hinges

直臂 Full overlay

■ 镍色 TJ1926+C02H0S
■ 黑钛色 TJ1926+C02H0S(TG)

C=0 H=14+K-D

D H K	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

中弯 Half overlay

■ 镍色 TJ1923+C02H0S
■ 黑钛色 TJ1923+C02H0S(TG)

C=9 H=5+K-D

D H K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8


大弯 Inset

■ 镍色 TJ1921+C02H0S
■ 黑钛色 TJ1921+C02H0S(TG)

C=18 H=-4+K+A

A H K	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

门板调节 Door Panel Adjustment

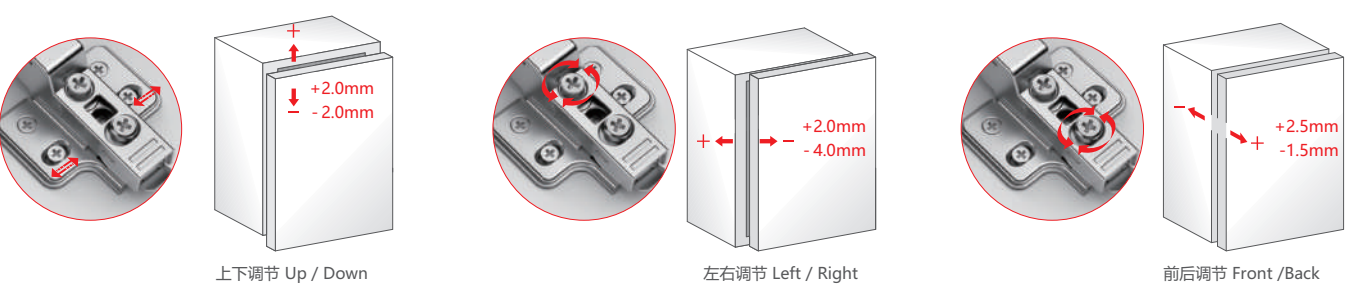

天斯 TINCÉE

ACCESSORIES SERIES


配件系列

好的产品就要有更稳定的配件。天斯的配件，丰富多样化，功能齐全且能按客户要求搭配。

Good products must have more stable accessories. TINCÉE accessories, rich and diversified, functional and can be matched according to customer requirements.


适配底座 Mounting plate

C22H0I 底座 Base

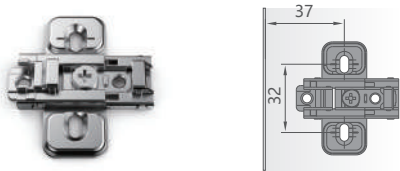

H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C22H0I	C22H0ID				
C22H2I	C22H2ID				
C22H4I	C22H4ID				

C21H0I 底座 Base

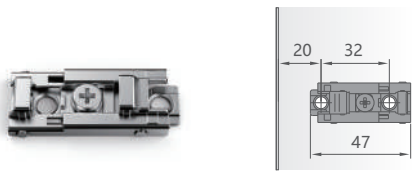

H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C21H0I	C21H0ID				
C21H2I	C21H2ID				
C21H4I	C21H4ID				

C20H0I 底座 Base




H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C20H0I	C20H0ID				
C20H2I	C20H2ID				
C20H4I	C20H4ID				

C02H0S 底座 Base



H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C02H0S	C02H0SD				
C02H2S	C02H2SD				
C02H4S	C02H4SD				

C51H0I 底座 Base

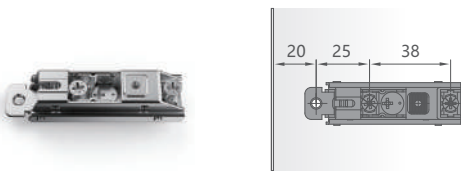

H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C51H0I					
C51H2I					
C51H4I					

C52H0I 底座 Base



H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C52H0I					
C52H2I					
C52H4I					




适配底座 Mounting plate

C58H0I 底座 Base




H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C58H0I					
C58H2I					
C58H4I					

C56H0S 底座 Base

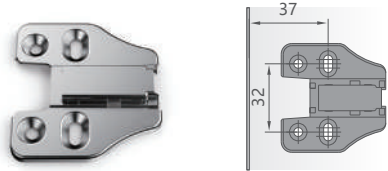


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C56H0S					
C56H2S					
C56H4S					

C57H0S 底座 Base

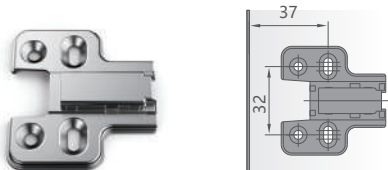


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C57H0S					
C57H2S					
C57H4S					

C56H0 底座 Base

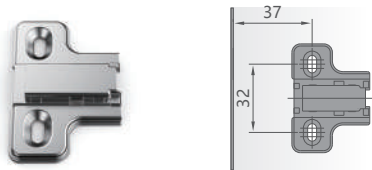


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C56H0					
C56H2					
C56H4					

C02H0 底座 Base

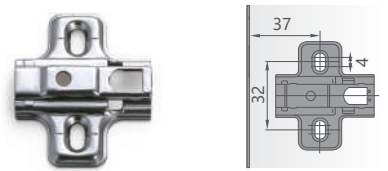

H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C02H0	C02H0D	C02H0K	C02H0N	C02H0M	C02H0E
C02H2	C02H2D	C02H2K	C02H2N	C02H2M	C02H2E
C02H4	C02H4D	C02H4K	C02H4N	C02H4M	C02H4E

SC02H0S 底座 Base

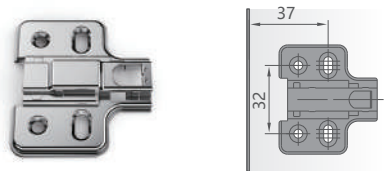


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
SC02H0S	SC02H0SD				
SC02H2S	SC02H2SD				
SC02H4S	SC02H4SD				




适配底座 Mounting plate

C55H0S 底座 Base

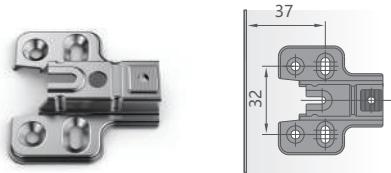


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C55H0S					
C55H2S					
C55H4S					

C50H0S 底座 Base

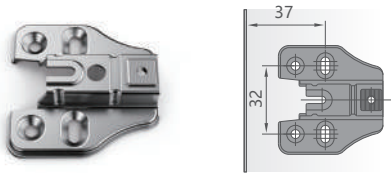


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C50H0S					
C50H2S					
C50H4S					

C05H0S 底座 Base

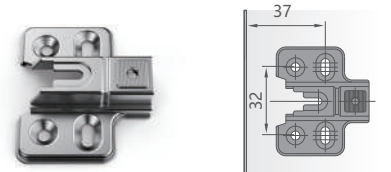


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C05H0S					
C05H2S					
C05H4S					

C55H0 底座 Base

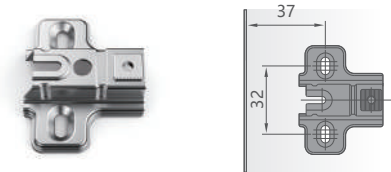


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
C55H0					
C55H2					
C55H4					

SC05H0S 底座 Base

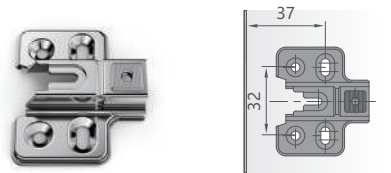

H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
SC05H0S	SC05H0SD				
SC05H2S	SC05H2SD				
SC05H4S	SC05H4SD				

A03H0S 底座 Base

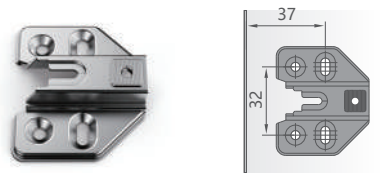


H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
A03H0S	A03H0SD				
A03H2S	A03H2SD				
A03H4S	A03H4SD				




适配底座 Mounting plate

A03H0 底座 Base

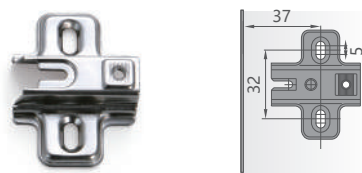

H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
A03H0	A03H0D	A03H0K	A03H0N	A03H0M	A03H0E
A03H2	A03H2D	A03H2K	A03H2N	A03H2M	A03H2E
A03H4	A03H4D	A03H4K	A03H4N	A03H4M	A03H4E

A18H0D 底座 Base

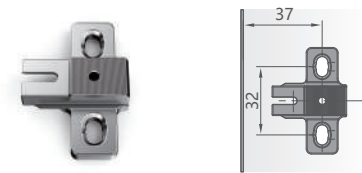

H=0、2、4					
配自攻螺丝 For self-tapping screw	配欧洲螺丝 With Euroscrew	配双桥胶粒 With double dowel	配M8胶粒 With M8 dowel	配M10胶粒 With M10 dowel	配快装螺丝 With easy-on screw
A18H0	A18H0D				
A18H2	A18H2D				
A18H4	A18H4D				

玻璃铰链装饰盖选择 Glass hinge decorative cover selection

方盖 Square cover



圆盖 Round cover



铰杯装配选择 Hinge cup assembly selection


铰杯装配 Hinge cup assembly



说明：按照需求选择铰链杯装配的螺丝、胶粒。上述(/、D、N、M、E)均表示装配不同配件的代号，例如A0306产品需要装配欧洲螺丝，下订单时的型号为A0306D，如此类推；如果是装配普通螺丝则不需要添加代号。

铰链可选配件 Hinge optional accessories

铰杯装饰盖 Hinge Cup Cover cap

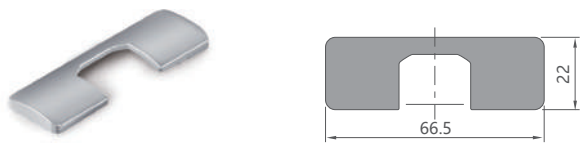

型号 Item No.	材质 Materials	颜色 Color
C03杯盖	SPCC	镍 Nickel

铰臂装饰盖(中弯、大弯) Hinge Arm Cover cap (Half overlay、Inset)



型号 Item No.	材质 Materials	颜色 Color
A191臂盖	SPCC	镍 Nickel

铰臂装饰盖(直臂) Hinge Arm Cover cap (Full overlay)



型号 Item No.	材质 Materials	颜色 Color
A196臂盖	SPCC	镍 Nickel

Ø5双桥胶粒 Ø5 Double dowel



型号 Item No.	材质 Materials	颜色 Color
K2	PA	黑 Black

Ø10双桥胶粒 Ø10 Double dowel




型号 Item No.	材质 Materials	颜色 Color
K6	PA	黑 Black



铰链可选配件 Hinge optional accessories

E10 快装胶粒 E10 Easy-on dowel

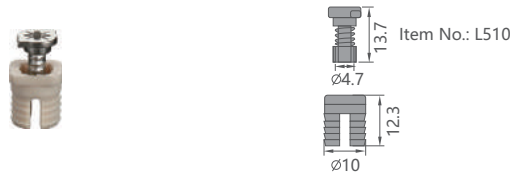

型号 Item No.	材质 Materials	颜色 Color
E1	PA	白 White

N8 胶粒(底座专用) N8 Dowel (Mounting plate)



型号 Item No.	材质 Materials	颜色 Color
N1	PA	白 White

N8 方耳胶粒(主体专用) N8 Square dowel (Hinge)



型号 Item No.	材质 Materials	颜色 Color
N2	PA	白 White

M10 胶粒 M10 Dowel



型号 Item No.	材质 Materials	颜色 Color
M1	PA	白 White

欧洲螺丝 Euro screw



型号 Item No.	材质 Materials	颜色 Color	高度 Height
D1/2/3/4/5	SPCC	镍 Nickel	10/11/12/14/16

沉头螺丝 Wood screw



型号 Item No.	材质 Materials	颜色 Color	高度 Height
V1/2/3/4	SPCC	镍 Nickel	12/14/16/24



天斯 TINCEE

BUMPER SERIES

反弹器系列

天斯柜门反弹器，拥有强劲的弹力，柜门一按即开，适配各类免拉手柜门需求，无论是小柜门还是大柜门，均可轻松反弹开启。免工具调节设计，安装调节更便捷！

Equipped with a robust spring mechanism, cabinet doors open with just a gentle push. This feature ensures effortless opening for cabinet doors of all sizes, enhancing convenience and accessibility!



CABINET DOOR BUMPER

柜门反弹器

Tap to open, tap to close

轻触开启，轻按闭合

天斯柜门反弹器，强劲弹力，无论大门还是小门，均能轻松反弹开启，拥有超长的使用寿命，为您的家具保驾护航。

Equipped with a robust spring mechanism, cabinet doors open with just a gentle push. This feature ensures effortless opening for cabinet doors of all sizes, enhancing convenience and accessibility.



柜门反弹器系列 Cabinet door bumper series




T002

产品介绍 Product Introduction

- 产品应用：适用于衣柜、橱柜、书柜等各种门板
- 弹出力度：26N± 1N
- 弹出长度：36mm
- 可调长度：0-5mm
- 磁铁款适合无力铰链
- 胶头款、磁铁款可供选择
- Application: Suitable for wardrobe, cabinet and bookcase
- Eject force: 26N± 1N
- Extention length: 36mm
- Adjustable length : 0-5mm
- Magnet model for unsprung hinge
- Rubber head and magnet models are available for selection

柜门反弹器系列 Cabinet door bumper series

产品尺寸 Product Size

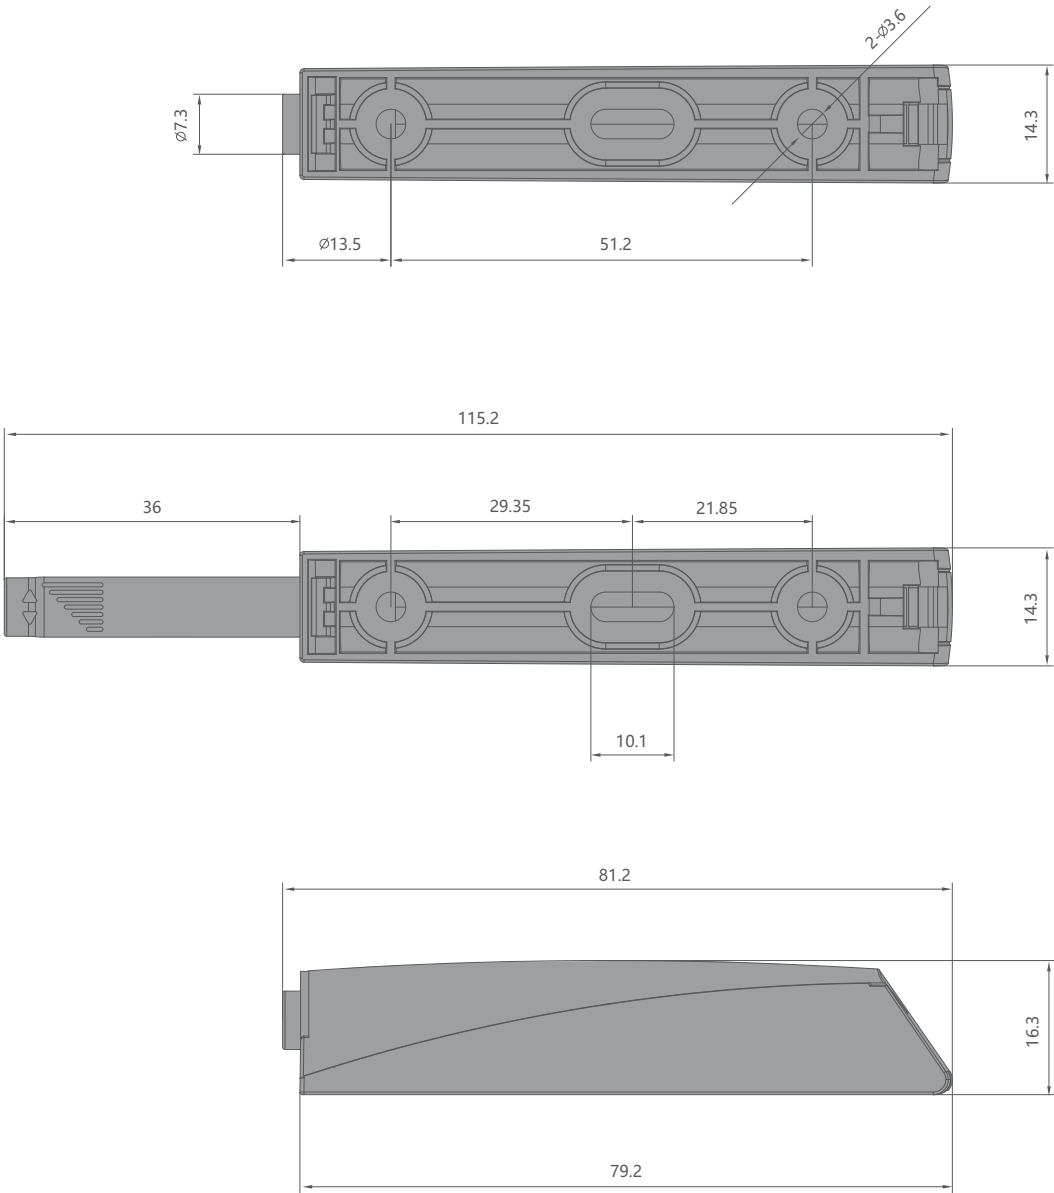

相关信息 Relevant Information

螺丝 Screw	3M磁吸粘贴片 3M magnetic adhesive sheet
130页 PAGE	20*20mm



CABINET DOOR BUMPER

柜门反弹器

Tap to open, tap to close

内芯可调节设计


旋转内芯，可调节内芯弹出的长度从而调节反弹器按压力度。

免装拉手，安装简单经久耐用，可调节门缝。

Rotate the inner core to adjust the length of the inner core to adjust the pressure of the bumper. Suitable for no handle cabinet applicaiton. It is easy to install, and durable, while the door gap is adjustable by this device.



柜门反弹器系列 Cabinet door bumper series

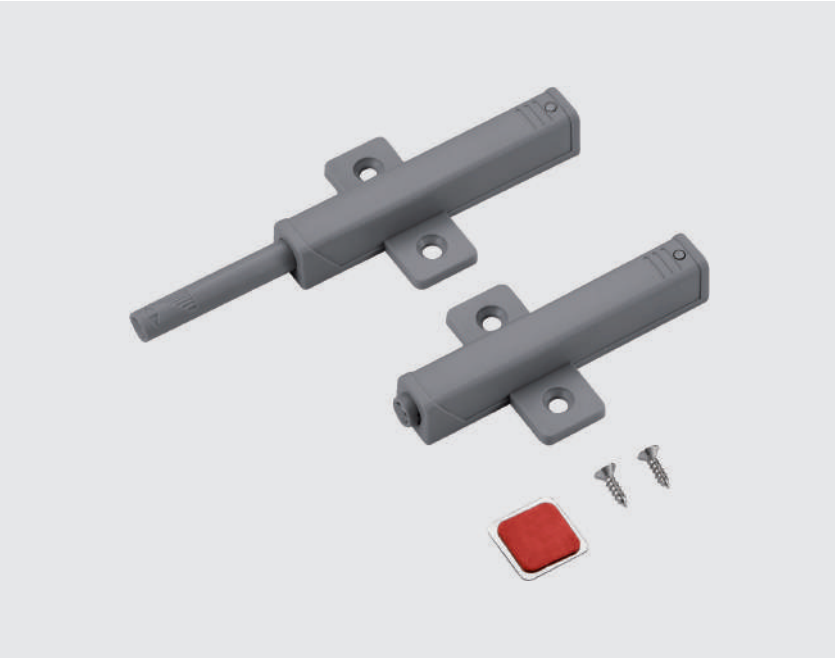


T001

产品介绍 Product Introduction

- 产品应用：适用于衣柜、橱柜、书柜等各种门板
- 弹出力度：43N ± 1.5N
- 弹出长度：48.5mm
- 可调长度：0-7mm
- 磁铁款适合无力铰链
- 胶头款、磁铁款可供选择
- Application: Suitable for wardrobe, cabinet and bookcase
- Eject force: 43N ± 1.5N
- Extention length: 48.5mm
- Adjustable length : 0-7mm
- Magnet model for unsprung hinge
- Rubber head and magnet models are available for selection

柜门反弹器系列 Cabinet door bumper series

产品尺寸 Product Size

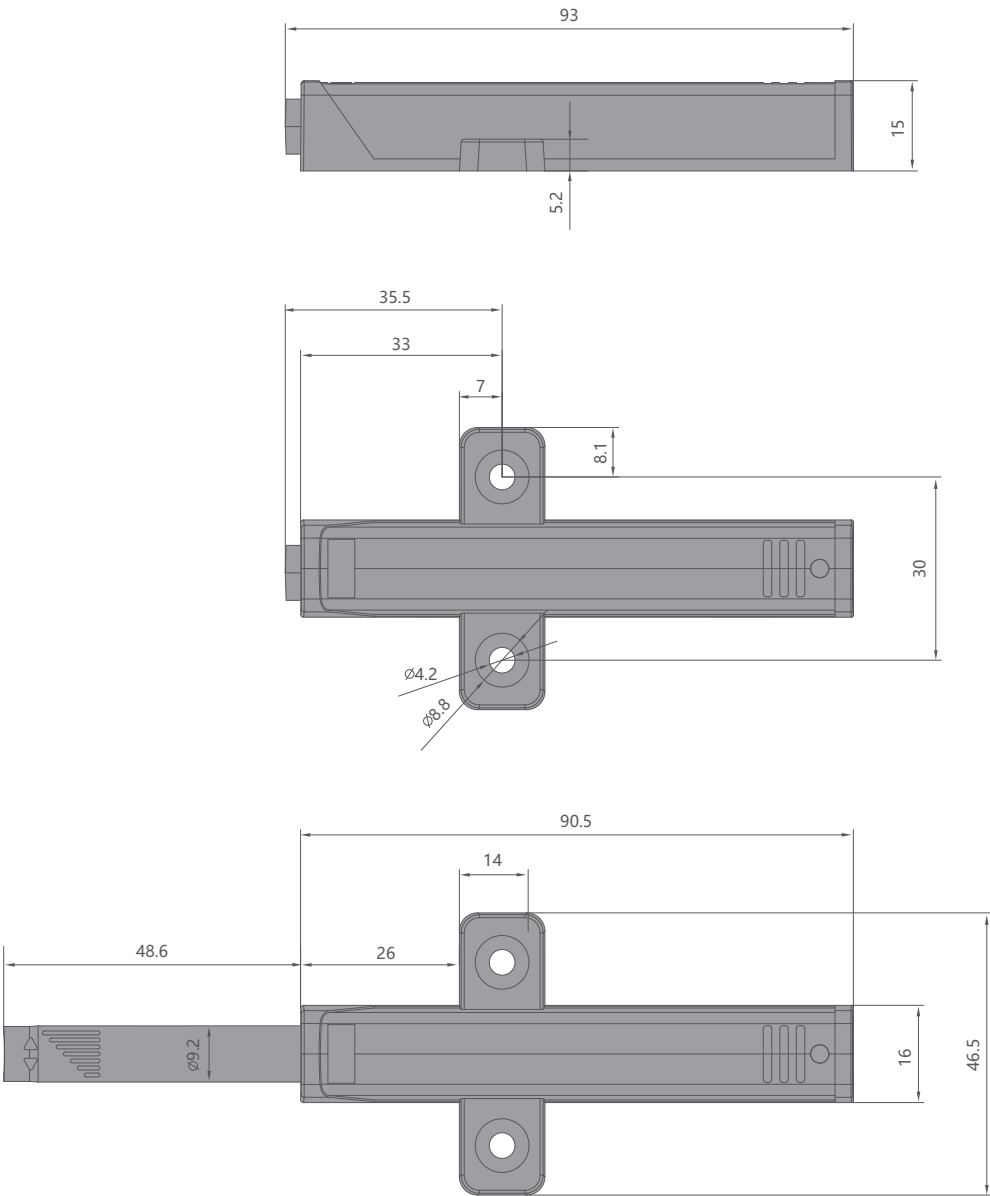

相关信息 Relevant Information

螺丝 Screw	3M磁吸贴片 3M magnetic adhesive sheet
130页 PAGE	20*20mm



CABINET DOOR BUMPER


柜门反弹器

Cabinet door bumper 明装卡扣式反弹器

搭配天斯三段力反弹铰链，一按开启，柜门不会回弹晃动，打开视野开阔，闭合自动锁固紧致，无论大门还是小门都能轻松弹启。
Equipped with the push open Hinge from TINCEE, simply press to open, ensuring the cabinet door does not rebound or shake. It offers a broad view when opened and automatically locks tightly when closed, making it easy to open both large and small doors with a smooth bounce.



明装卡扣式反弹器 Cabinet door bumper series

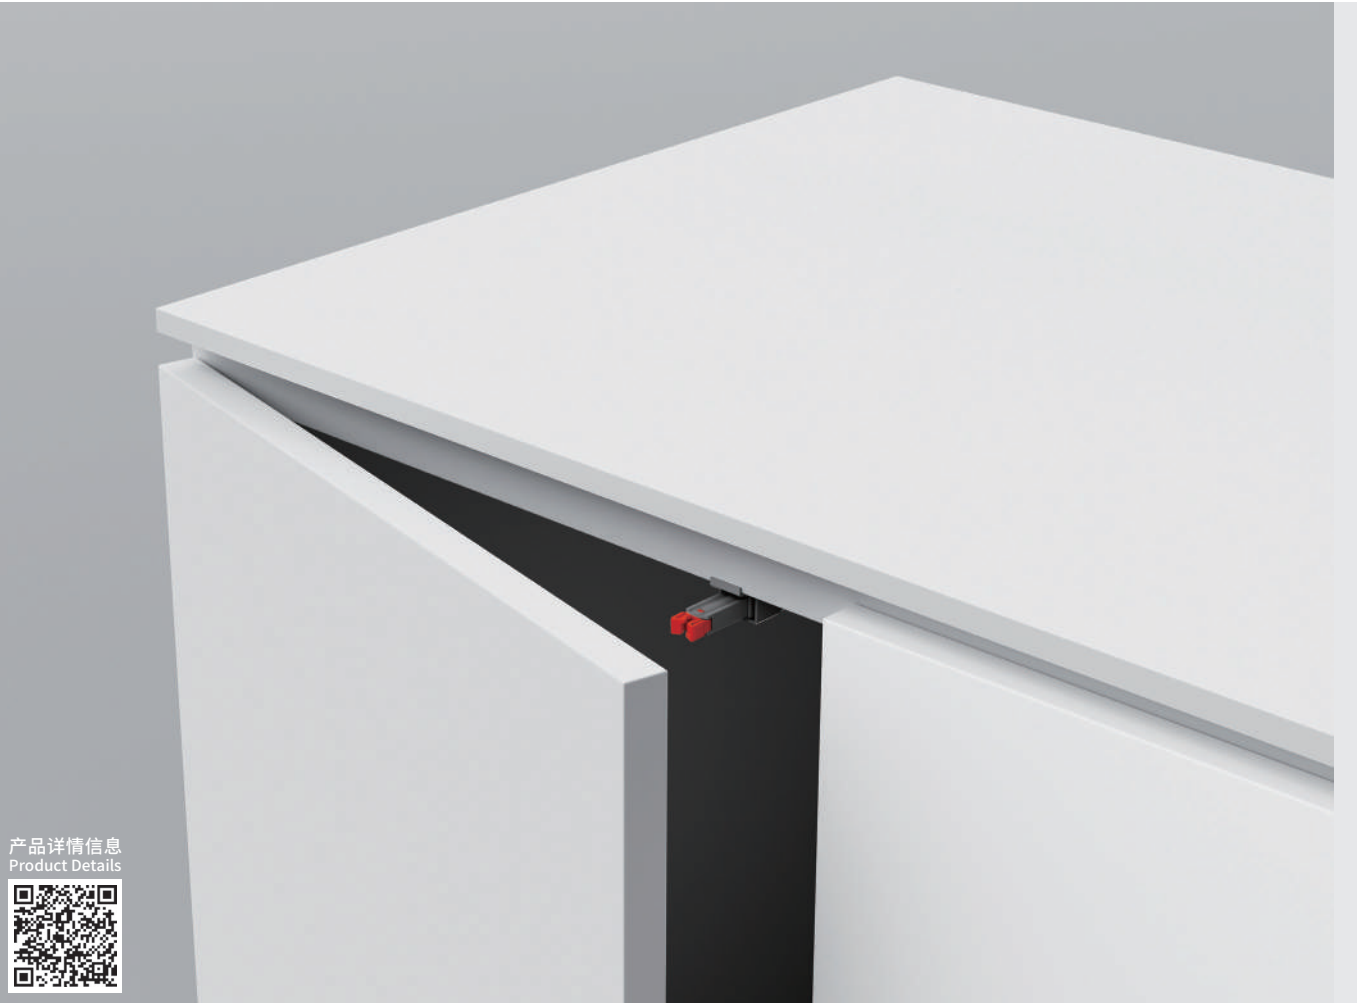


T003

产品介绍 Product Introduction

- 产品应用：适用于衣柜、橱柜、书柜等各种门板
- 弹出力度：25N
- 可调节长度：0到7mm
- 材质：POM
- Application: Suitable for wardrobe, cabinet and bookcase
- Eject force: 25N
- Adjustable length: 0-7mm
- Material: POM


明装卡扣式反弹器 Cabinet door bumper series

产品尺寸 Product Size

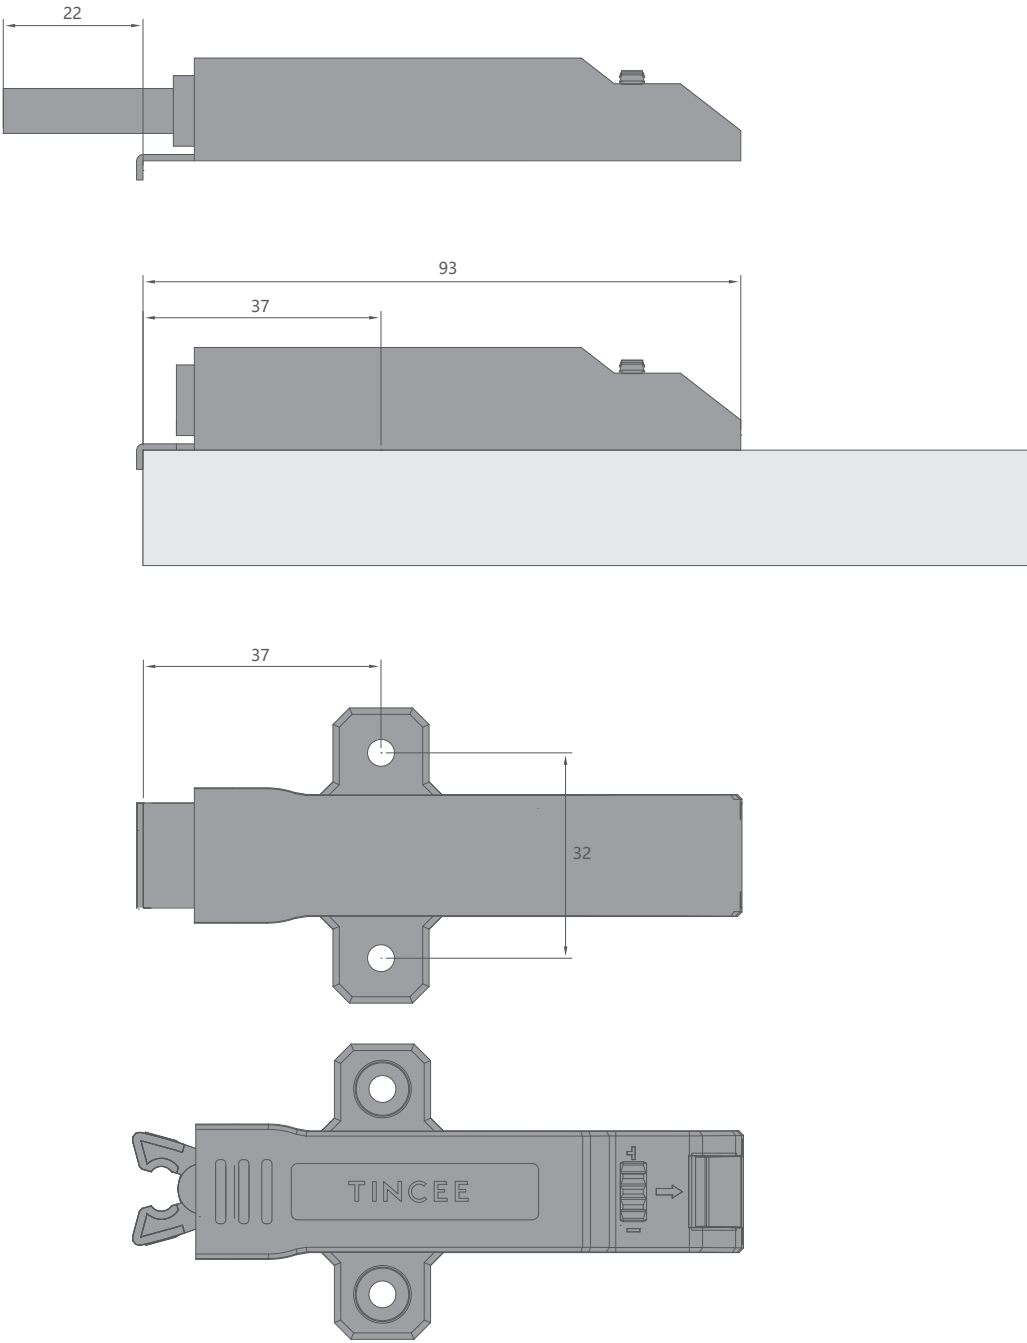

相关信息 Relevant Information

铰链 Hinge	搭配反弹铰链 To suit push open hinge
TJ19 or T043 series	

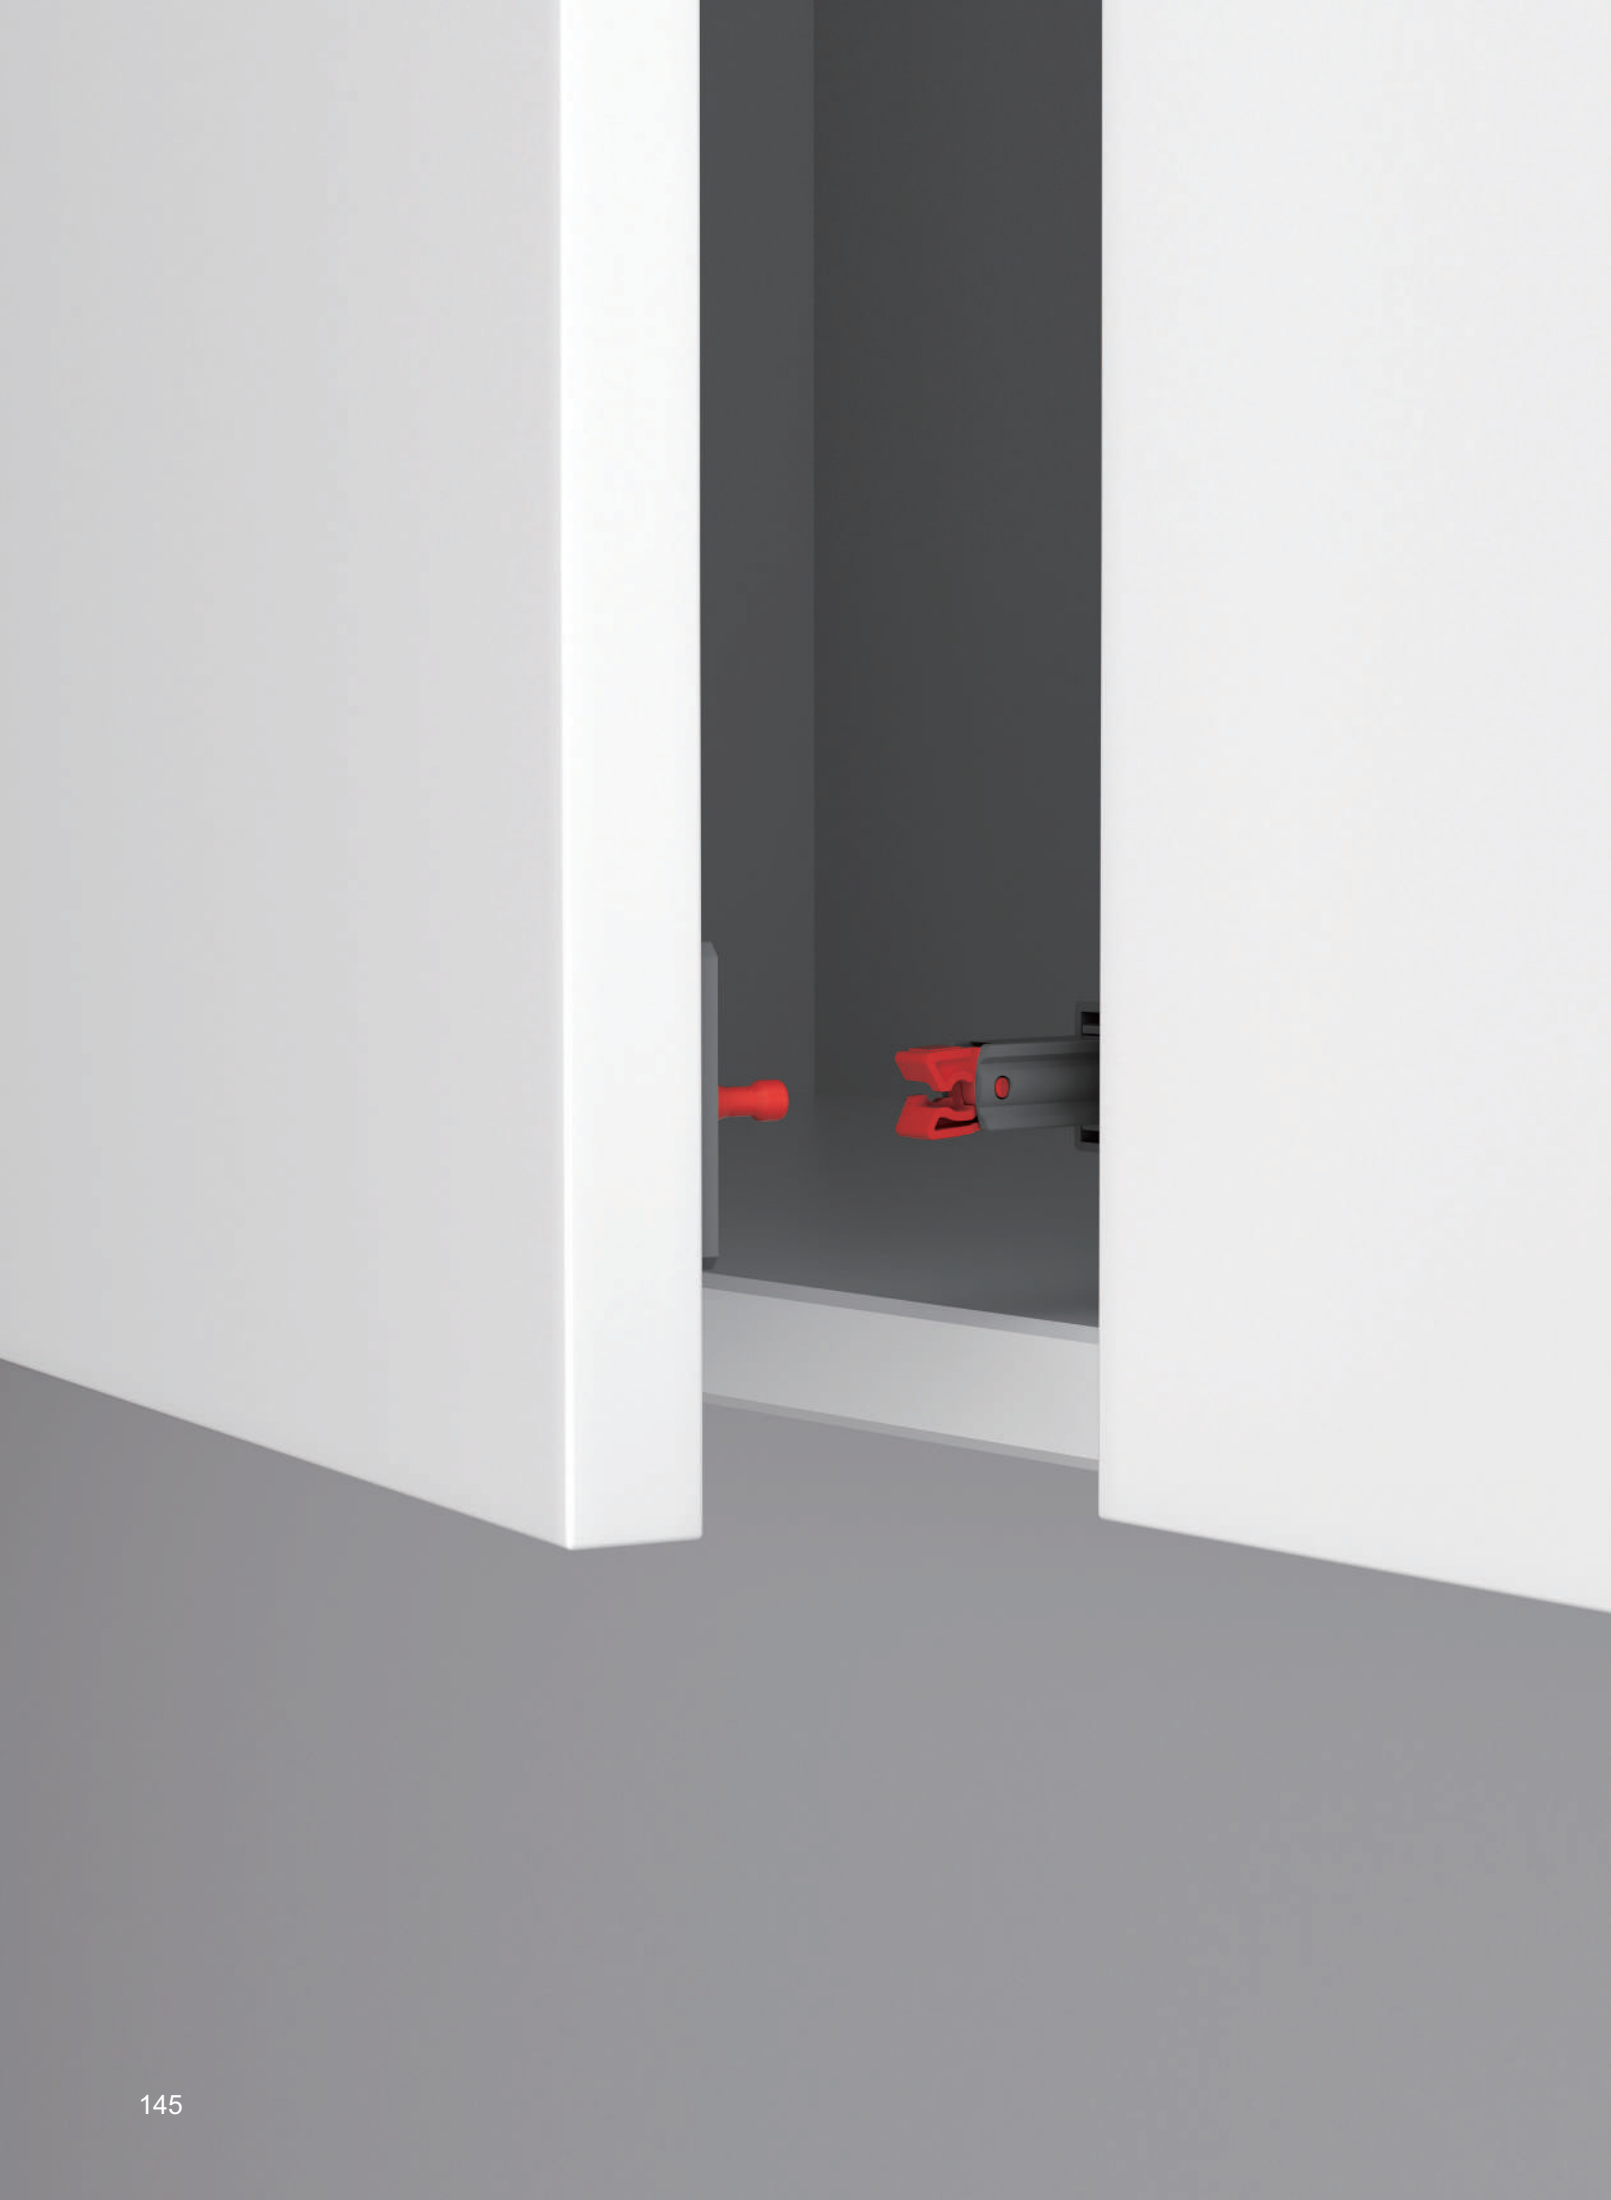

CABINET DOOR BUMPER


柜门反弹器

Cabinet door bumper 暗装卡扣式反弹器

搭配天斯三段力反弹铰链，一按开启，柜门不会回弹晃动，打开视野开阔，闭合自动锁固紧致，无论大门还是小门都能轻松弹启。
Equipped with the push open Hinge from TINCEE, simply press to open, ensuring the cabinet door does not rebound or shake. It offers a broad view when opened and automatically locks tightly when closed, making it easy to open both large and small doors with a smooth bounce.



暗装卡扣式反弹器 Cabinet door bumper series

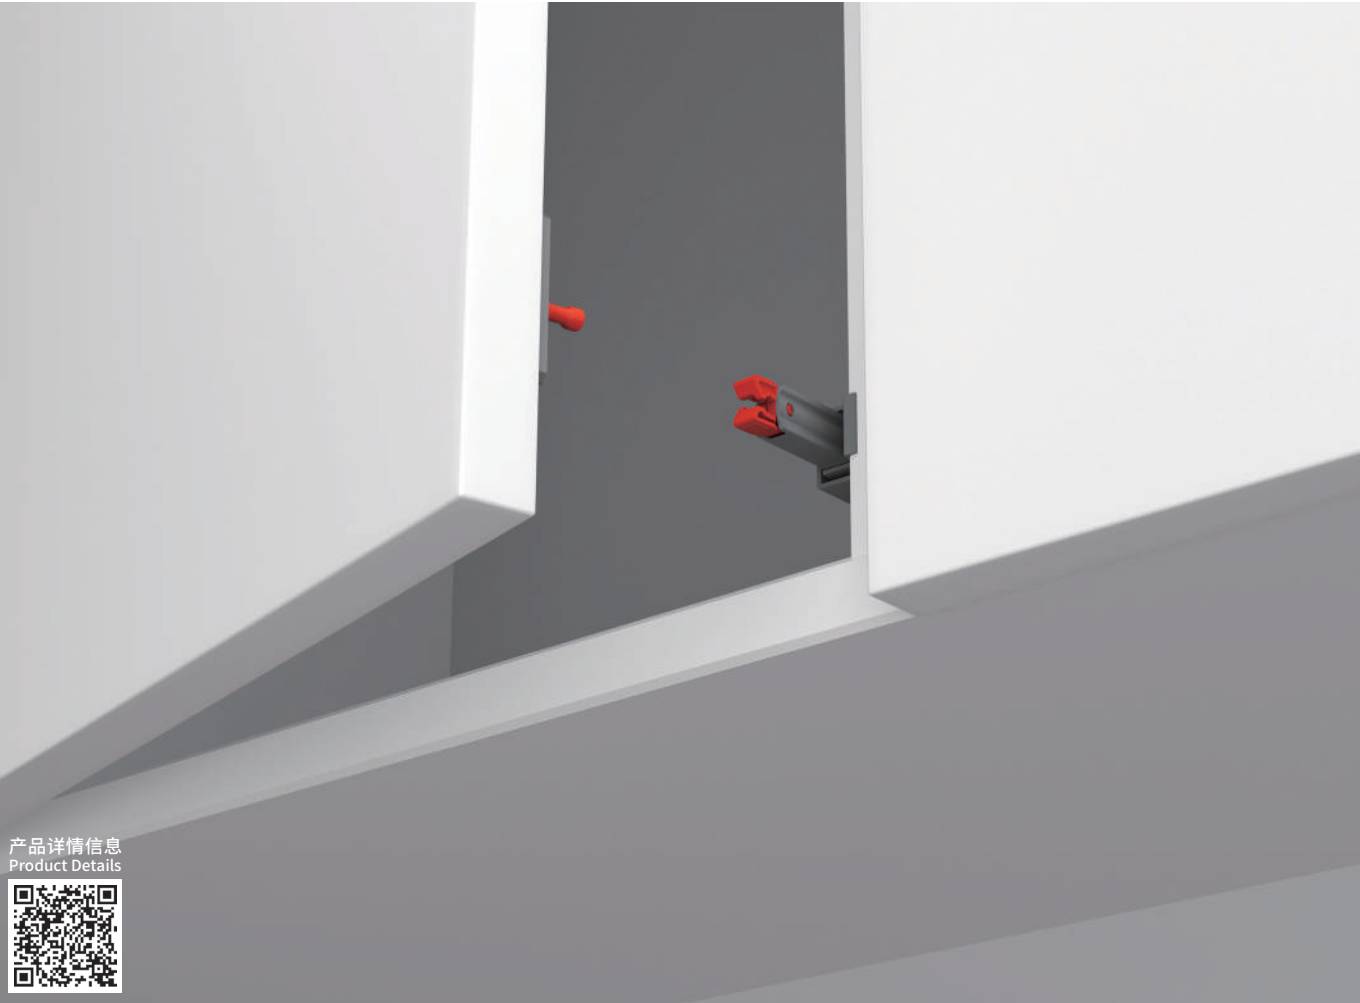


T004

产品介绍 Product Introduction

- 产品应用：适用于衣柜、橱柜、书柜等各种门板
 - 弹出力度：25N
 - 可调节长度：0到7mm
 - 材质：POM
-
- Application: Suitable for wardrobe, cabinet and bookcase
 - Eject force: 25N
 - Adjustable length: 0-7mm
 - Material: POM

暗装卡扣式反弹器 Cabinet door bumper series

产品尺寸 Product Size

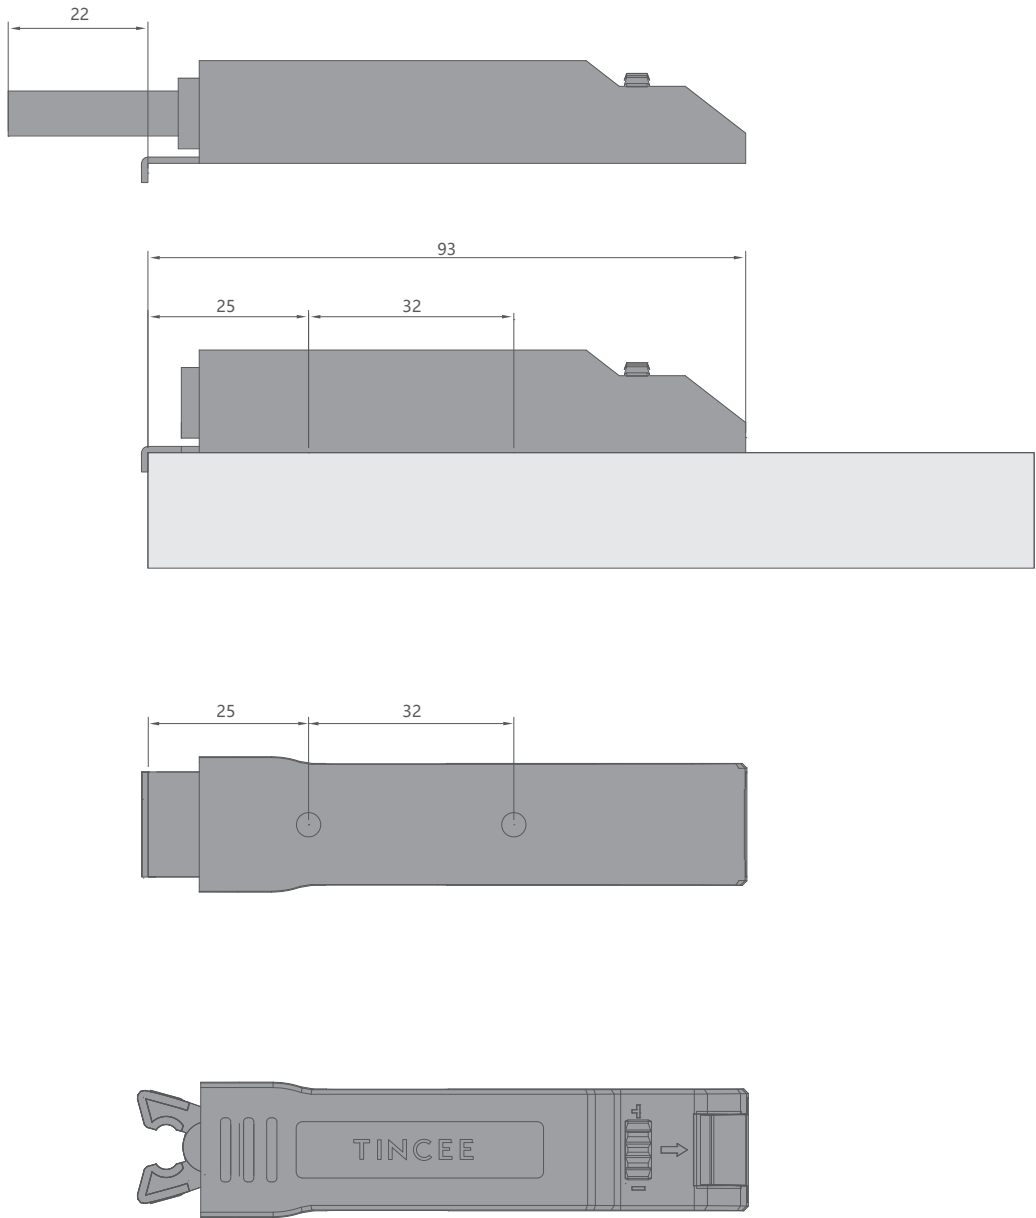

相关信息 Relevant Information

铰链 Hinge	搭配反弹铰链 To suit push open hinge
TJ19 or T043 series	



3D ALUMINUM FRAME HINGE SERIES

针式铰链

3D Aluminum frame hinge series 针式铰链

搭配极简风格铝框门，适用于25mm、35mm厚铝框门，柜门开启角度大，取物视野开阔，精选铝合金制造，先进喷涂工艺防腐耐用，超长使用寿命
The Aluminum Frame Hinges are suitable for 25mm and 35mm aluminum frame doors, offering a wide opening angle and an unobstructed view for easy access. Made from high-quality aluminum alloy, these hinges ensure outstanding durability and an extended service life.



25针式铰链 Aluminum Frame Hinge




TWB25


产品介绍 Product Introduction

- 适用于25mm厚专用铝框门
- 门最大尺寸：高度2700mm，宽度500mm
- 开启角度：直臂210°，中弯160°
- 底座高度：11mm
- 全盖最大盖位D=18mm，半盖最大盖位D=12mm
- 材质：锌合金
- 表面处理：喷涂
- Suitable for 25mm aluminum frame doors
- Maximum size of door: height 2700mm, width 500mm
- Opening angle: 210°、160°
- Mounting plate height: 11mm
- Maximum full overlay: 18mm, half overlay: 12mm
- Material: Zinc alloy
- Spraying plating



柜体侧板开孔尺寸 Dimensions of cabinet side panels drilling

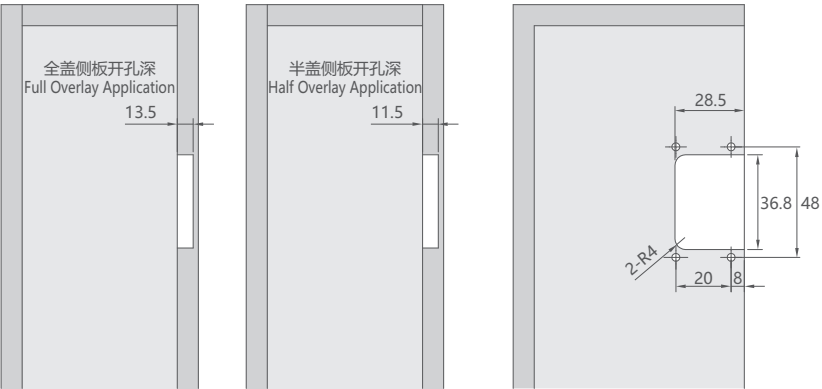

产品尺寸 Product size

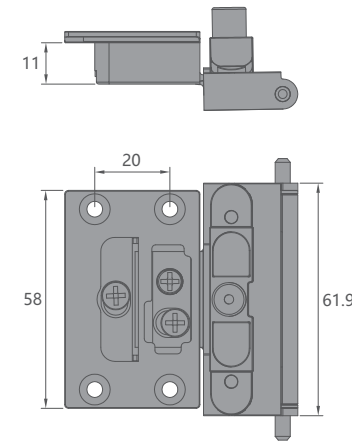

铝材开孔尺寸 Dimensions of Aluminum drilling

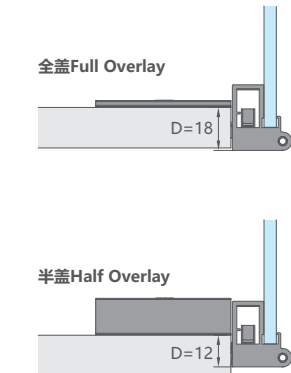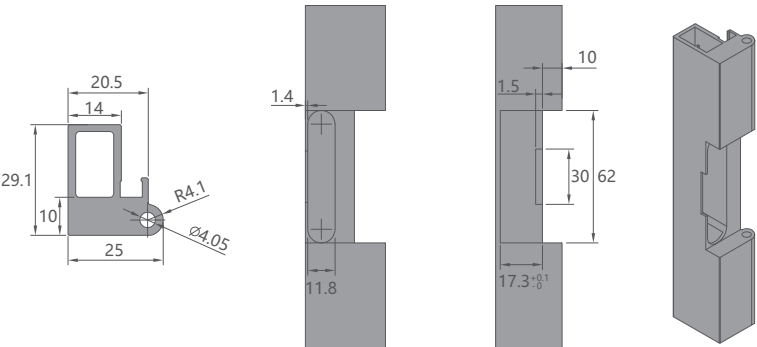


25针式铰链 Aluminum Frame Hinge

门板与柜体间减尺参数 Reduction parameters between door panels and cabinets

案例一 Case Study 1

计算公式 Calculation Formula

$A_{\text{门}} = W_1 / 2 + 14$

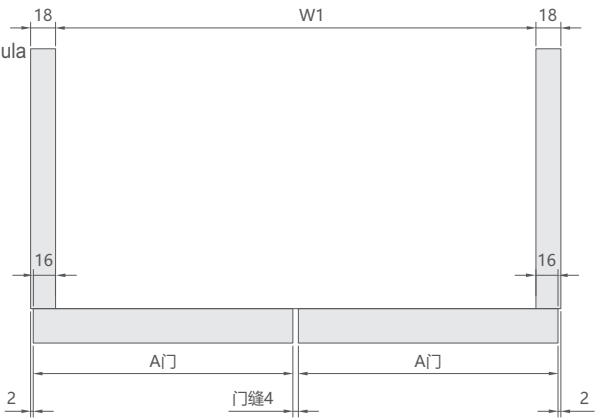


案例二 Case Study 2

计算公式 Calculation Formula

$A_{1\text{门}} = W_1 / 2 + 14$



$A_{\text{门}} = W_1 / 2 + 8.5$

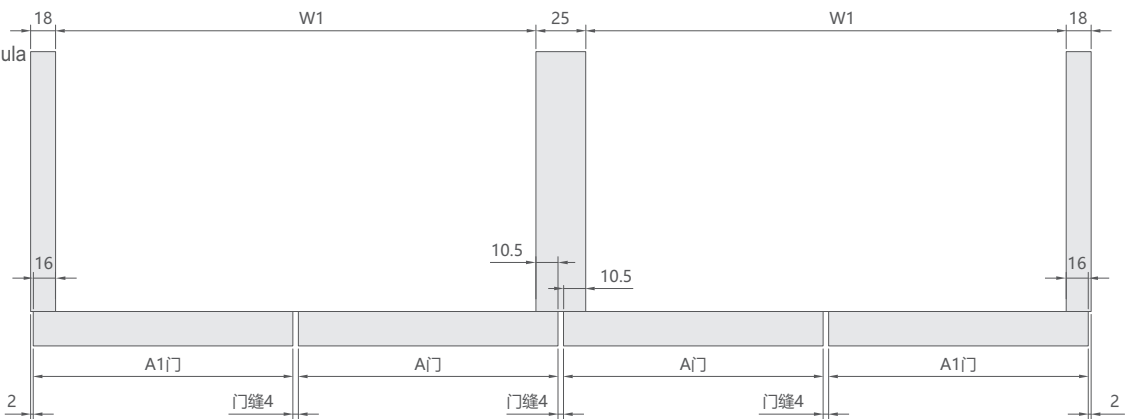

调校方法 Door panel adjustment



门缝调节 front/back

+4.0mm
-0mm





盖位调节 left/right

-4.0mm



上下调节 Up / Down

+2.0mm
-2.0mm



35针式铰链 Aluminum Frame Hinge




TWB35


产品介绍 Product Introduction

- 适用于35mm厚专用铝框门
- 门最大尺寸：高度2700mm，宽度500mm
- 开启角度：270°
- 底座高度：11mm
- 全盖最大盖位D=18mm，半盖最大盖位D=12mm
- 材质：锌合金
- 表面处理：喷涂
- Suitable for 35mm aluminum frame doors
- Maximum size of door: height 2700mm, width 500mm
- Opening angle: 270°
- Mounting plate height : 11mm
- Maximum full overlay: 18mm, half overlay:12mm
- Material: Zinc alloy
- Spraying plating


柜体侧板开孔尺寸 Dimensions of cabinet side panels drilling

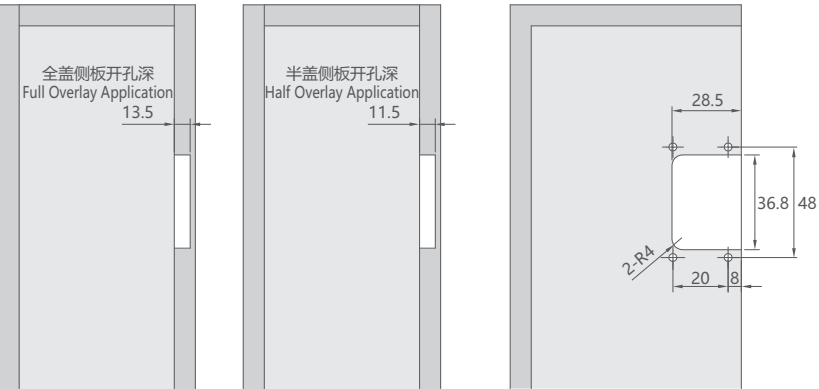

铝材开孔尺寸 Dimensions of Aluminum drilling

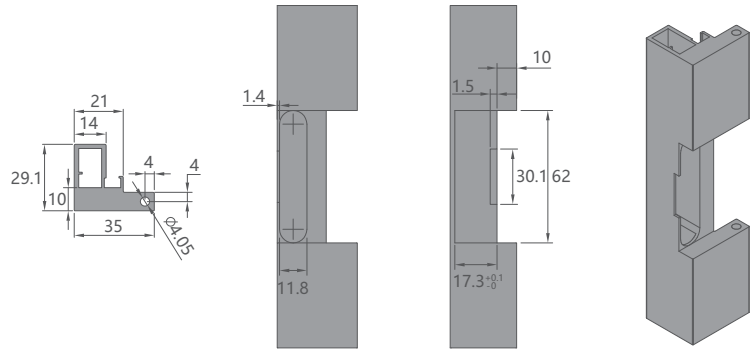


产品尺寸 Product size

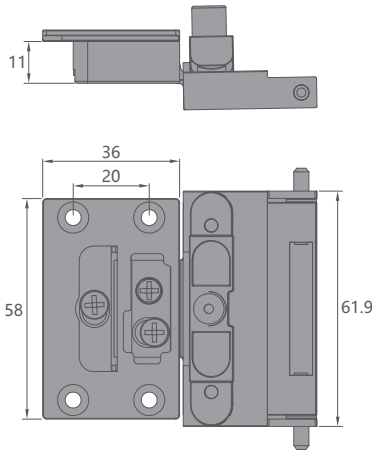

全盖Full Overlay



半盖Half Overlay




35针式铰链 Aluminum Frame Hinge

门板与柜体间减尺参数 Reduction parameters between door panels and cabinets

案例一 Case Study 1

计算公式 Calculation Formula

$A_{\text{门}} = W_1 / 2 + 14$

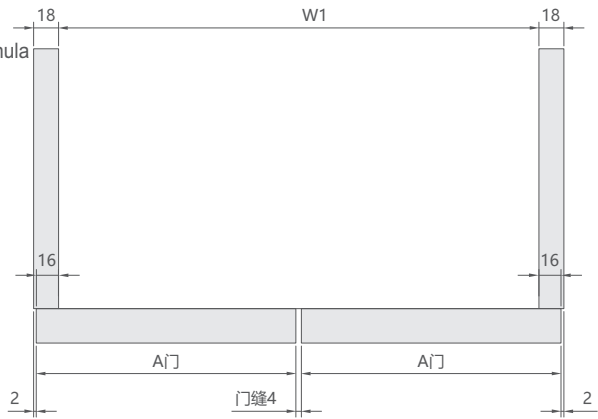


案例二 Case Study 2

计算公式 Calculation Formula



$A_{1\text{门}} = W_1 / 2 + 14$

$A_{\text{门}} = W_1 / 2 + 8.5$


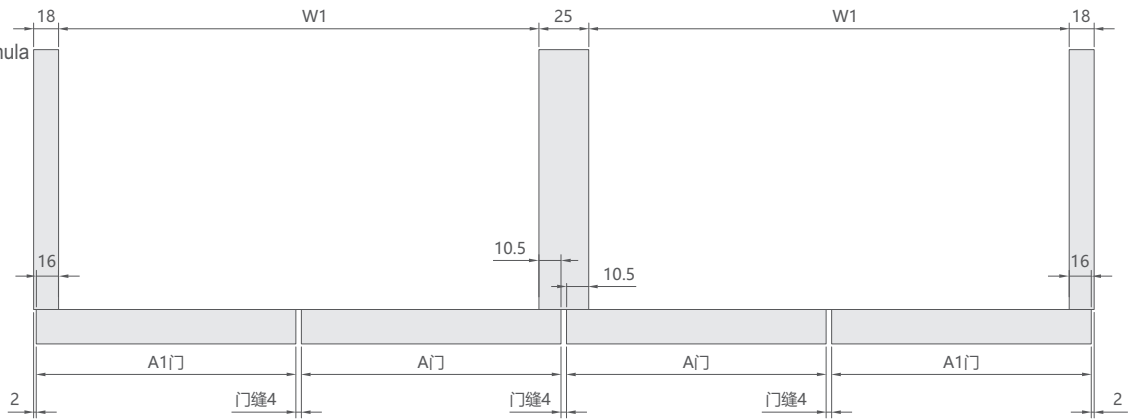


调校方法 Door panel adjustment



门缝调节 front/back
+4.0mm
-0mm



盖位调节 left/right
-4.0mm



上下调节 Up / Down
+2.0mm
-2.0mm





CONCEALED HINGE SERIES

天地铰链系列

Concealed hinge 天地铰链

天斯天地铰链系列，包含重型天地铰链、轻型天地铰链，嵌入式安装于柜体，对称美观、轻柔静音，广泛应用于橱柜，衣柜，卫浴柜，酒柜等柜门。
TINCEE Concealed Hinge Series includes both heavy-duty and light-duty concealed hinges. These hinges feature a symmetrical, aesthetic design with smooth, quiet operation, making them ideal for use in cabinets, wardrobes, bathroom cabinets, and wine cabinets.



轻型天地铰链 Light-duty concealed hinges



TWC25

产品介绍 Product Introduction

- 可适用于18-32mm木门及铝框门
- 门最大尺寸：高度2700mm，宽度500mm
- 金属杯深：16.5mm
- 开启角度：103°
- 木门门板钻孔距离 K 值：3-6mm，铝框门固定K值：4mm
- 最大盖位 D=21.5mm(木门)，D=19.5mm(铝框门)
- 材质：锌合金+钢材
- 表面处理:镀黑镍
- Suitable for 18-32mm wooden doors and aluminum frame doors
- Maximum size of door: height 2700mm, width 500mm
- Drilling depth: 16.5mm
- Opening angle: 103°
- Drilling distance of the wooden door: 3-6mm
- Drilling distance of thealuminum frame doors: 4mm
- Maximum overlay(wooden doors): 21.5mm
- Maximum overlay(aluminum frame doors): 19.5mm
- Material: Zinc alloy, steel
- Black nickel plating

铰链切割量 Hinge Coverage Table

A(min) K	T	18	20	22	24	26	28	30	32
3		0	0.2	0.5	0.8	1.4	2.5	4.2	6.0
4		0	0.2	0.4	0.8	1.3	2.4	3.8	5.4
5		0	0.2	0.4	0.8	1.2	2.3	3.4	5.0
6		0	0.2	0.4	0.8	1.2	2.2	3.2	4.5

门板最小间隙 Minimum Gap Of Door Panels


L(min) K	T	18	20	22	24	26	28	30	32
3		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
4		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
5		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
6		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

注：以上表中数值基于门板边沿为直角边，如门板边沿为圆角边，表中数值相应减小


K=门板钻孔到门板边沿的距离 Hinge cup drilling distance A=门板与侧柜的距离 Door panel movement clearance
T=门板厚度 Thickness of the door panel L=门板与侧板的间隙 Gap between the door panel and cabinet

门板调节 Door Panel Adjustment


门缝调节 front/back
+4.0mm
-0mm

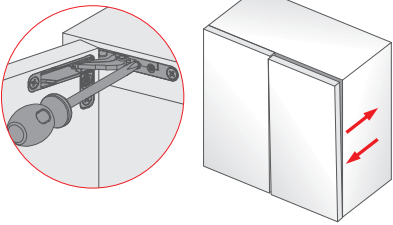

盖位调节 left/right
+2.0mm
-2.0mm

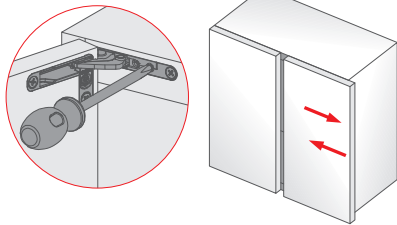


上下调节 Up / Down
+2.0mm
-2.0mm

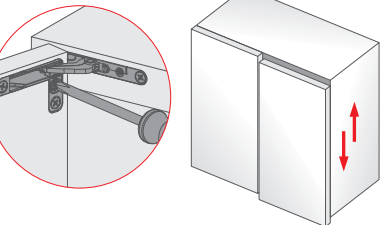

轻型天地铰链 Light-duty concealed hinges

全盖/半盖 Full Overlay/Half Overlay

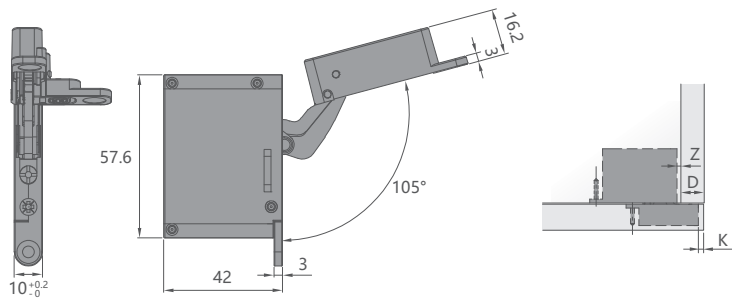





全盖(半盖根据加大Z值实现)
Full Overlay(increase the Z value to achieve Half Overlay)
 $Z=(16.5+K)-D$

D	Z	K	3	4	5	6
3			16.5	17.5	18.5	19.5
4			15.5	16.5	17.5	18.5
5			14.5	15.5	16.5	17.5

注：Z值和D值在符合表中数值的情况下，得出的D值，在通过调节D值还有正负2的调节范围 Overlay adjustment in Ideal Situation: ± 2mm



装底盒柜体开孔尺寸 Dimensions of cabinet bottom drilling

单位Unit: mm

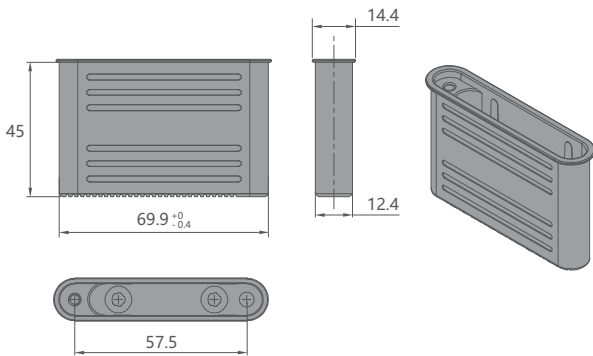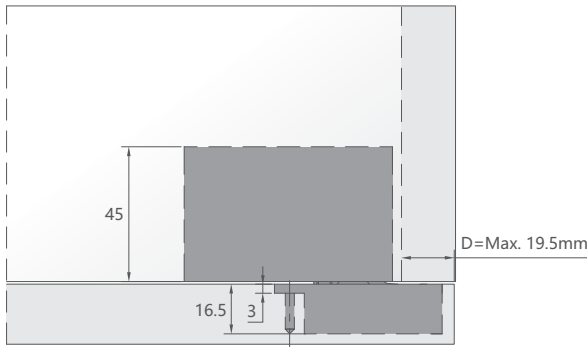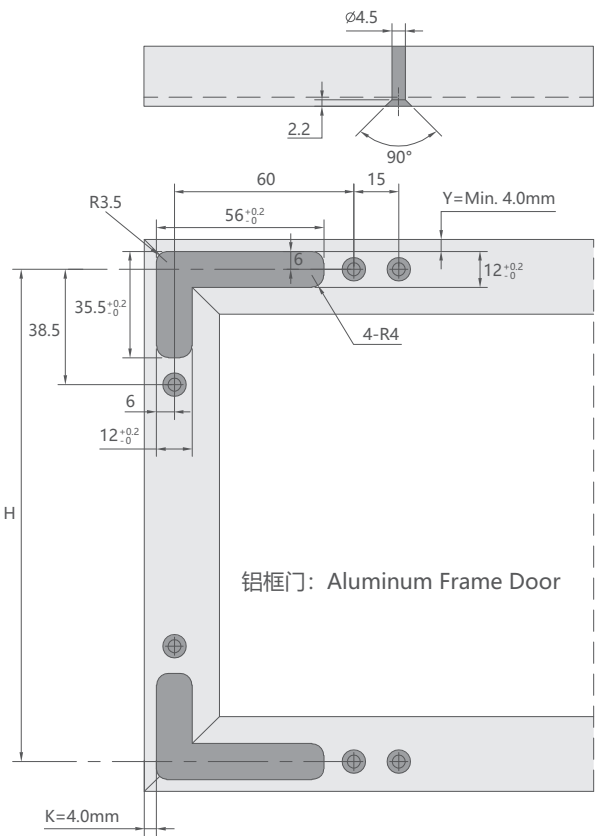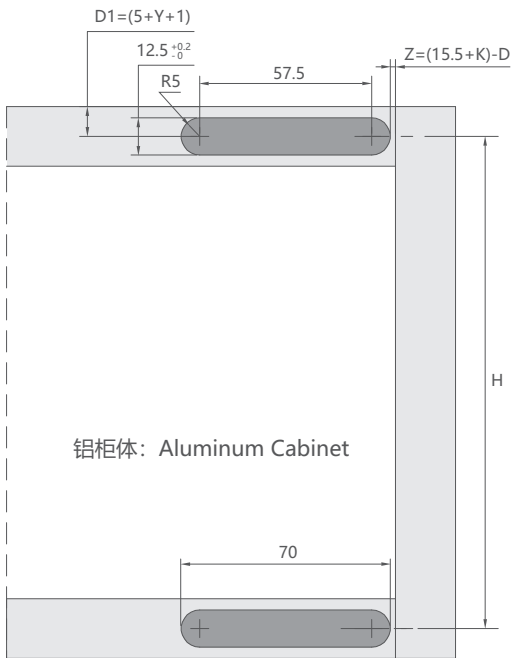



铝框门开孔尺寸 Dimensions of Aluminum frame door

单位Unit: mm

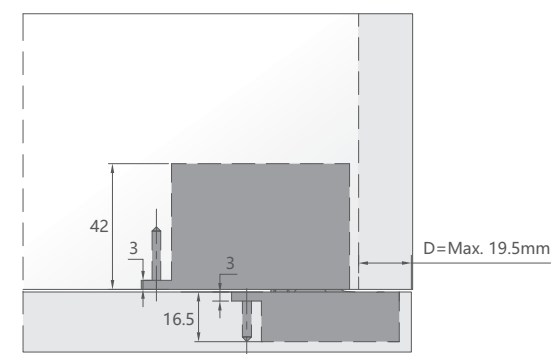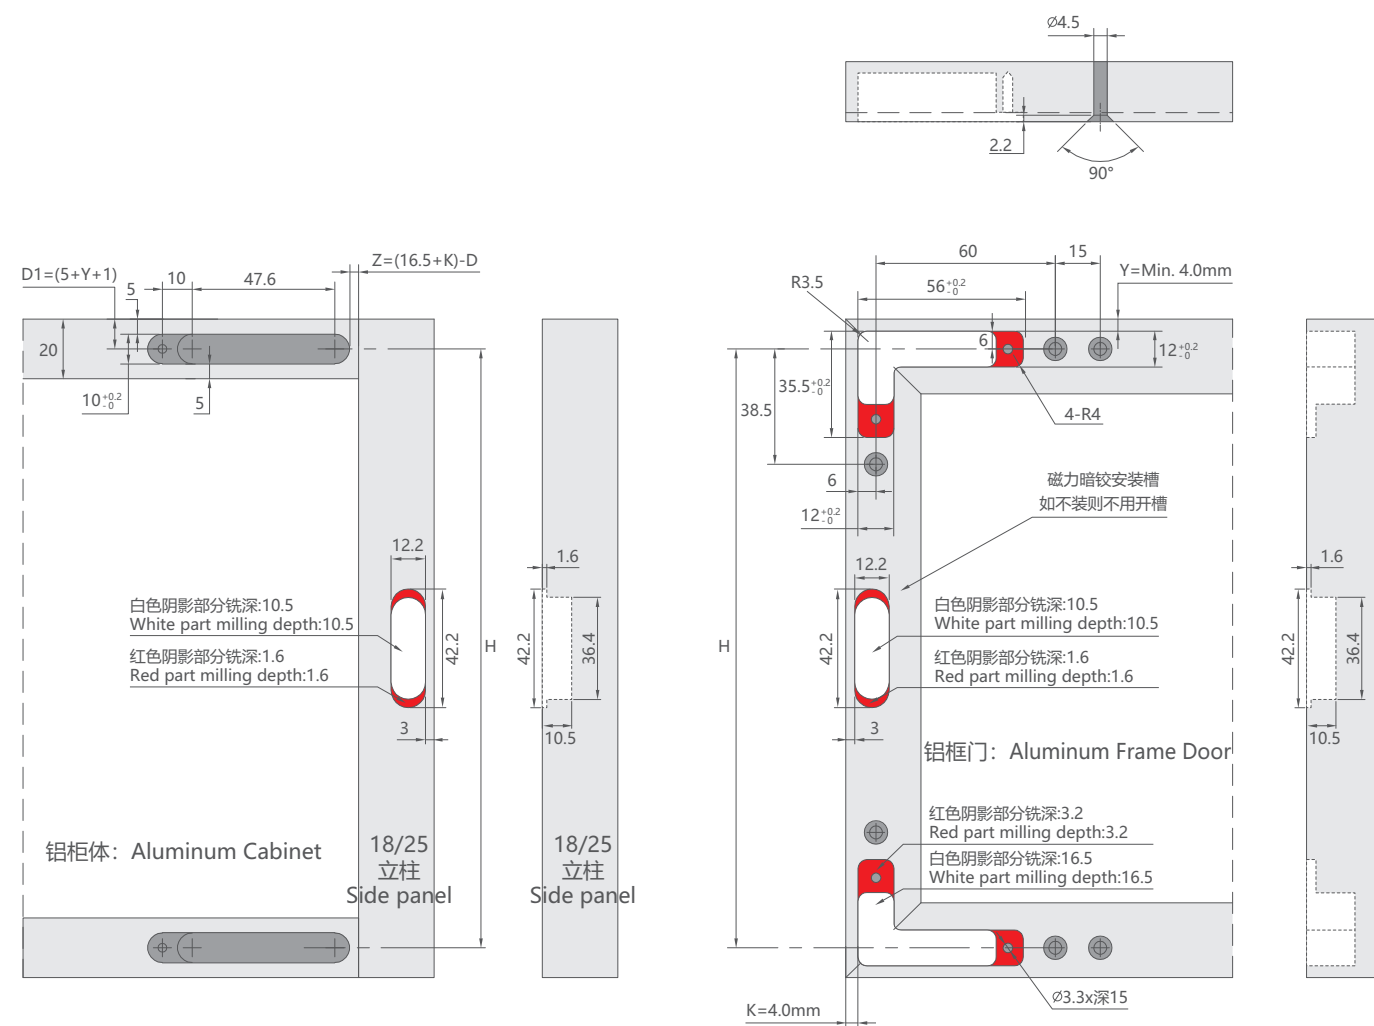

木门开孔尺寸 Dimensions of Wooden door

单位Unit: mm

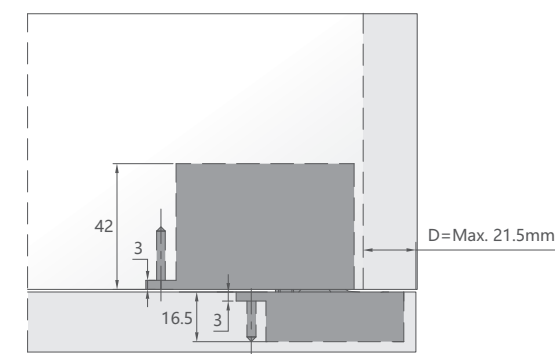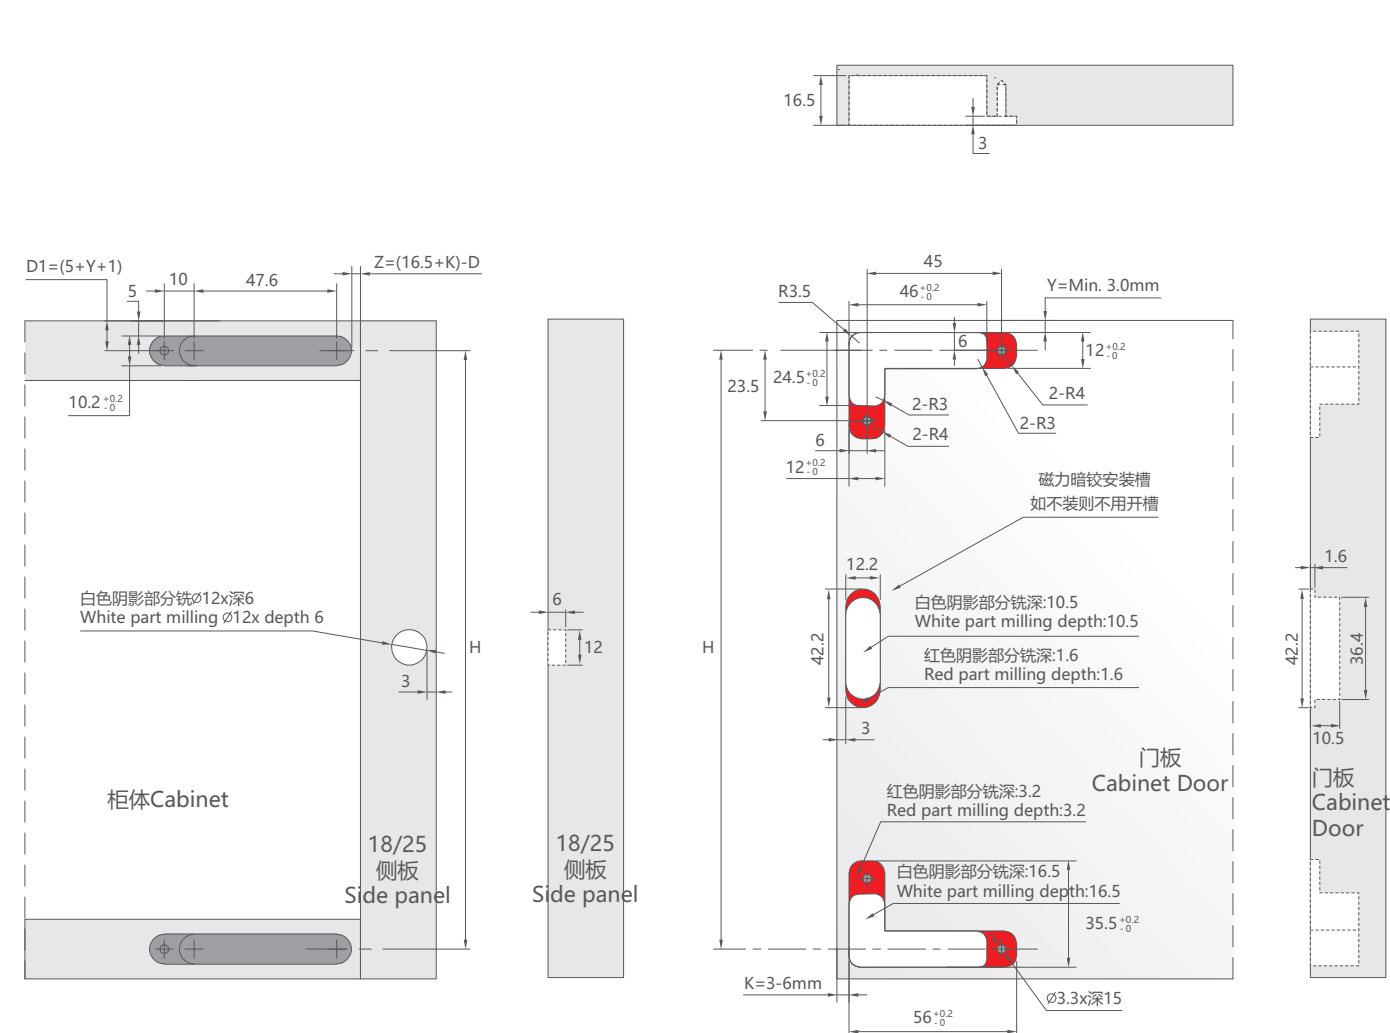

重型天地铰链 Heavy-duty concealed hinges



TWC35

产品介绍 Product Introduction

- 可适用于22-35mm木门及铝框门
 - 门最大尺寸：高度3000mm，宽度600mm
 - 金属杯深：18mm
 - 开启角度：105°
 - 木门门板钻孔距离K值：4-8mm，铝框门固定K值：4mm
 - 最大盖位 D=30mm(木门)，D=26mm(铝框门)
 - 材质：锌合金+钢材
 - 表面处理：镀黑镍
-
- Suitable for 22-35mm wooden doors and aluminum frame doors
 - Maximum size of door: height 3000mm, width 600mm
 - Drilling depth: 18mm
 - Opening angle: 105°
 - Drilling distance of the wooden door: 4-8mm
 - Drilling distance of tealuminum frame doors: 4mm
 - Maximum overlay(wooden doors): 30mm
 - Maximum overlay(aluminum frame doors): 26mm
 - Material: Zinc alloy, steel
 - Black nickel plating

铰链切割量 Hinge Coverage Table


A(min) K T	22	24	26	28	30	32	35
4	0	0	0	0.1	0.3	0.5	1.6
5	0	0	0	0.1	0.3	0.5	1.6
6	0	0	0	0.1	0.3	0.5	1.6
7	0	0	0	0.1	0.3	0.5	1.6
8	0	0	0	0.1	0.3	0.5	1.6

门板最小间隙 Minimum Gap Of Door Panels

L(min) K T	22	24	26	28	30	32	35
4	1.0	1.0	1.0	1.0	1.0	1.0	1.0
5	1.0	1.0	1.0	1.0	1.0	1.0	1.0
6	1.0	1.0	1.0	1.0	1.0	1.0	1.0
7	1.0	1.0	1.0	1.0	1.0	1.0	1.0
8	1.0	1.0	1.0	1.0	1.0	1.0	1.0



注：以上表中数值基于门板边沿为直角边，如门板边沿为圆角边，表中数值相应减小
K=门板钻孔到门板边沿距离 A=门板与侧柜的距离
T=门板厚度 L=门板与侧板的距离

门板调节 Door Panel Adjustment

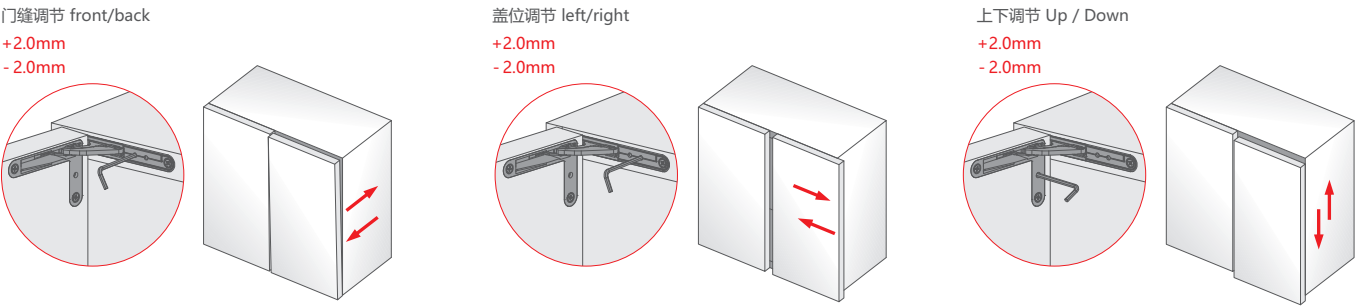

重型天地铰链 Heavy-duty concealed hinges



全盖/半盖 Full Overlay/Half Overlay

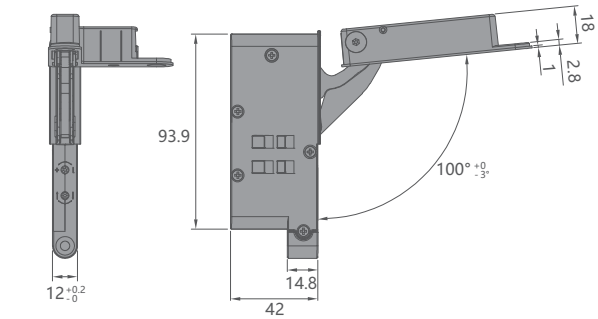

全盖(半盖根据加大Z值实现)
Full Overlay(increase the Z value to achieve Half Overlay)
 $Z=(23.5+K)-D$



D	Z	K	4	5	6	7	8
2.5	25	26	27	28	29		
3.5	24	25	26	27	28		
4.5	23	24	25	26	27		
.....	盖位以此类推						
The overlay value follows the same rule							

装底盒柜体开孔尺寸 Dimensions of cabinet bottom drilling

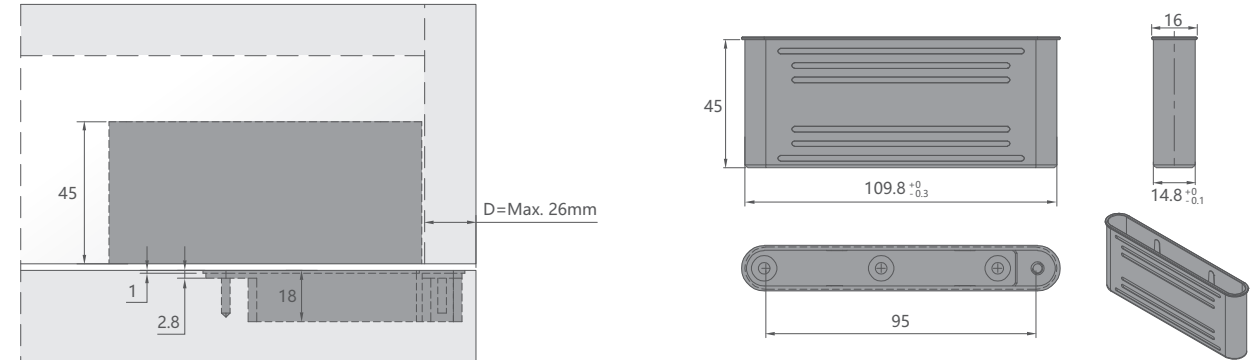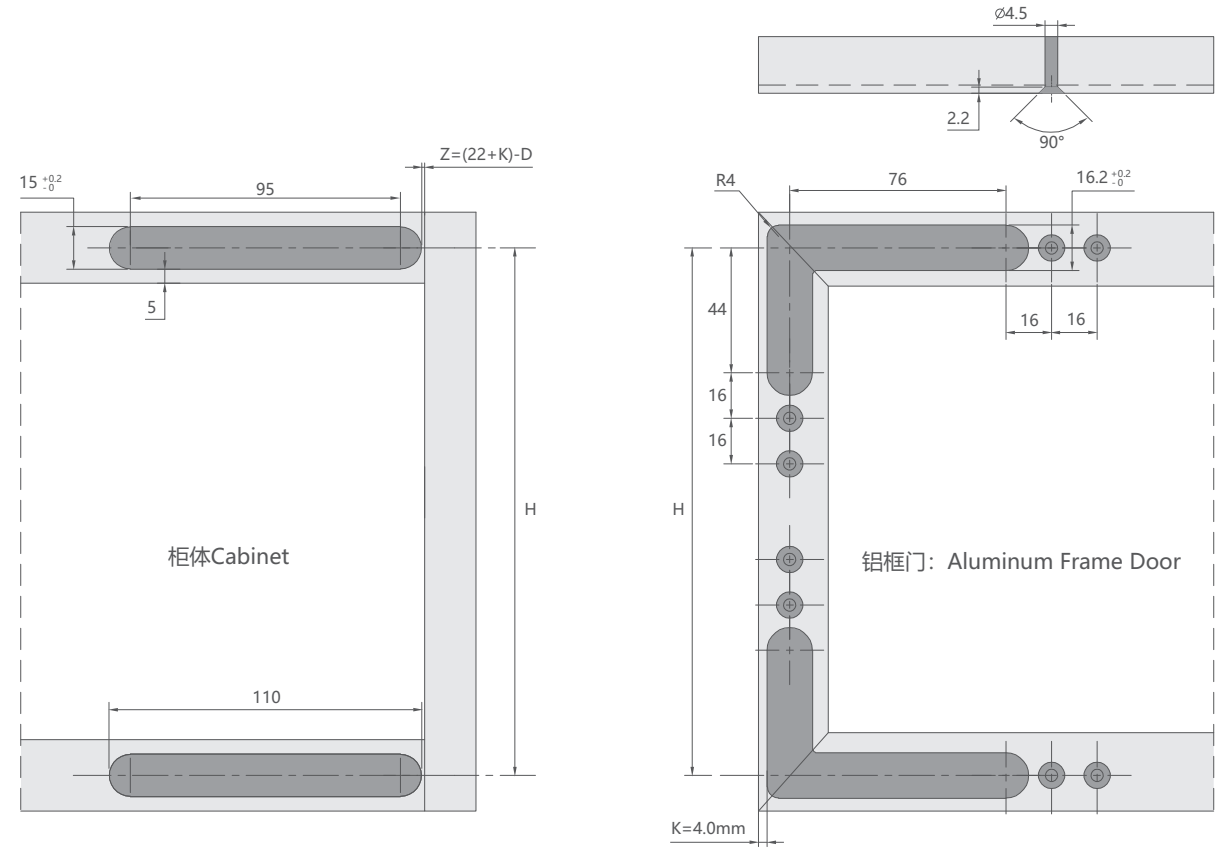



重型天地铰链 Heavy-duty concealed hinges

铝框门开孔尺寸 Dimensions of Aluminum frame door

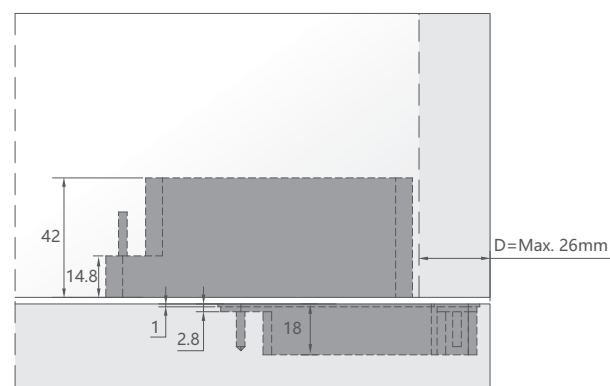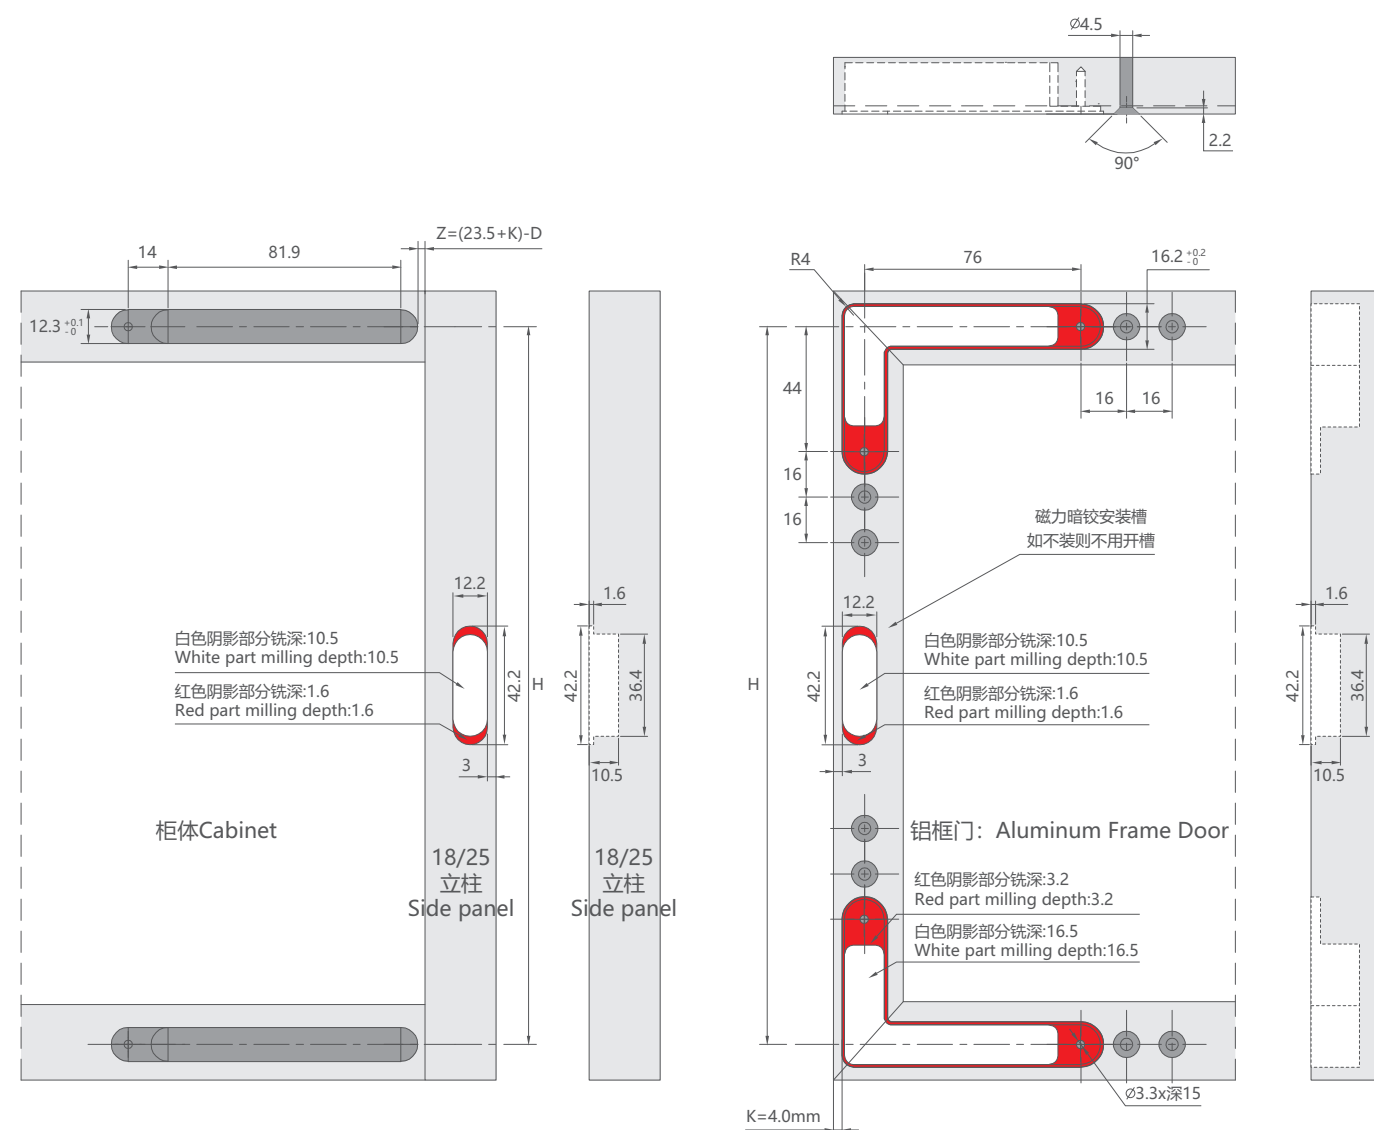

重型天地铰链 Heavy-duty concealed hinges

木门开孔尺寸 Dimensions of Wooden door

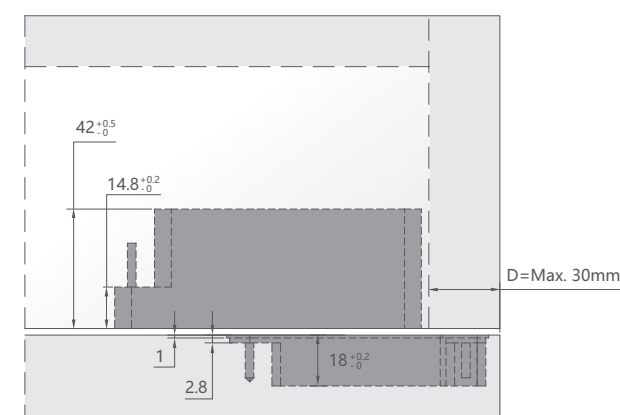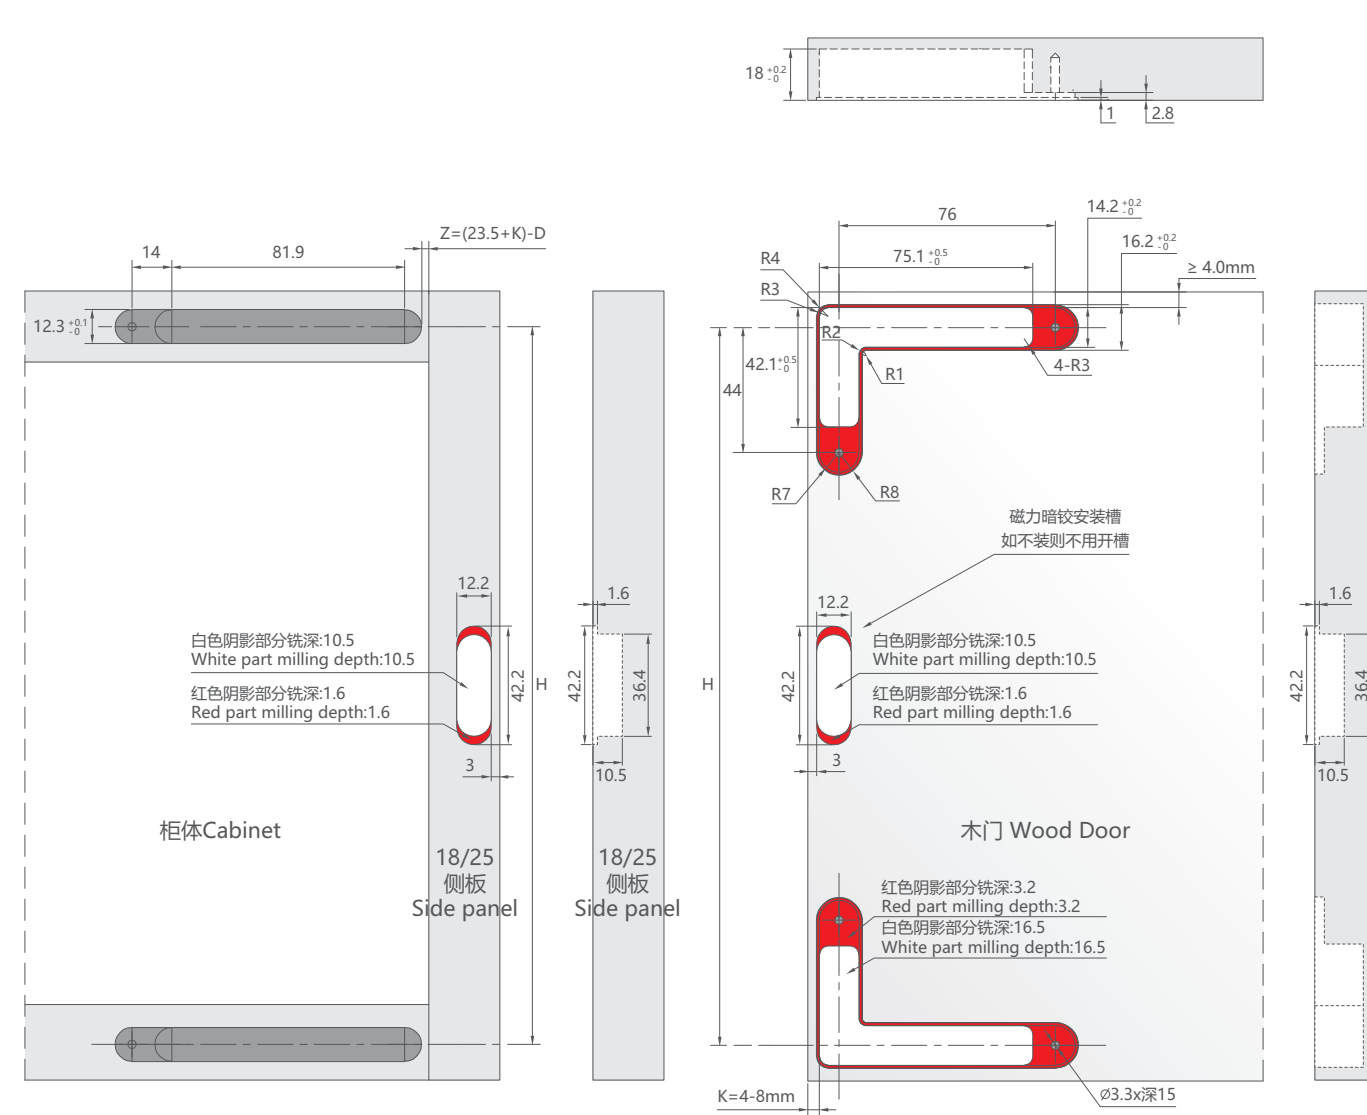

天斯 TINCEE

SLIDE SERIES

滑轨系列

抽屉滑轨在家居装修中扮演着重要的角色，它们影响到抽屉的使用体验和寿命。在选择和安装抽屉滑轨时，要仔细考虑抽屉的用途、负载要求和空间限制，以确保滑轨能够满足您的需求。而天斯品牌更是滑轨赛道中的佼佼者，使用专利阻尼技术，独特的跑车级刹车系统，在安装美观的同时，即使推力过大，也能快速缓冲，保持静音平稳关闭，确保物品摆放井然有序，长期使用零磨损，提高客户使用感。

Drawer slides play an important role in home decoration, they affect the experience and life of the drawer. When selecting and installing drawer slides, carefully consider the drawer's purpose, load requirements and space limitations to ensure that the slide can meet your needs. The TINCEE brand is the leader in the slide track, the use of patented damping technology, the unique sports car brake system, in the installation of beautiful, even if the thrust is too large, but also can quickly buffer, keep quiet and smooth closure, to ensure that the items placed in an orderly manner, long-term use of zero wear, improve the customer's sense of use.



FULL EXTENSION SOFT-CLOSE&PUSH- OPEN BALL BEARING SLIDE 三节阻尼反弹钢珠滑轨

Patented damping technology,
sports car-style braking system

专利阻尼技术
跑车级刹车系统

即使推力过大，也能快速缓冲，
保持静音平稳关闭，长期使用零磨损
Even if you slam the drawer,
it can quickly buffered to maintain silence and achieve smooth closure.



三节阻尼反弹钢珠滑轨 45mm Full extension soft close and push-open ball bearing slide




4531FS

产品介绍 Product Introduction


- 产品应用：商用与家用抽屉，及类似装置等
- 产品特点：单向全拉出，按弹开启，缓冲闭合
- 产品负载：30kg
- 可选长度：300mm-500mm
- 产品表面：电泳黑/蓝锌可选
- 材料厚度：1.2*1.2*1.5mm
- Application: Commercial and household drawers
- Product features: Full extension, Push-open&Soft-close integrated
- Loading capacity: 30KG
- Nominal Length: 300-500mm
- Product surface: Electroplating Bluezinc/Black
- Material thickness: 1.2*1.2*1.5mm

三节阻尼反弹钢珠滑轨 45mm Full extension soft close and push-open ball bearing slide

空间需求 Space Requirement

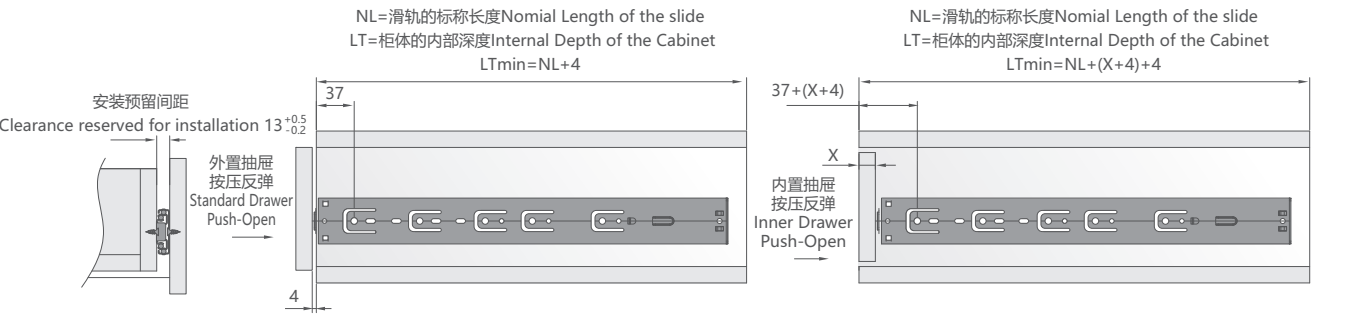

安装孔距 Drilling Pattern

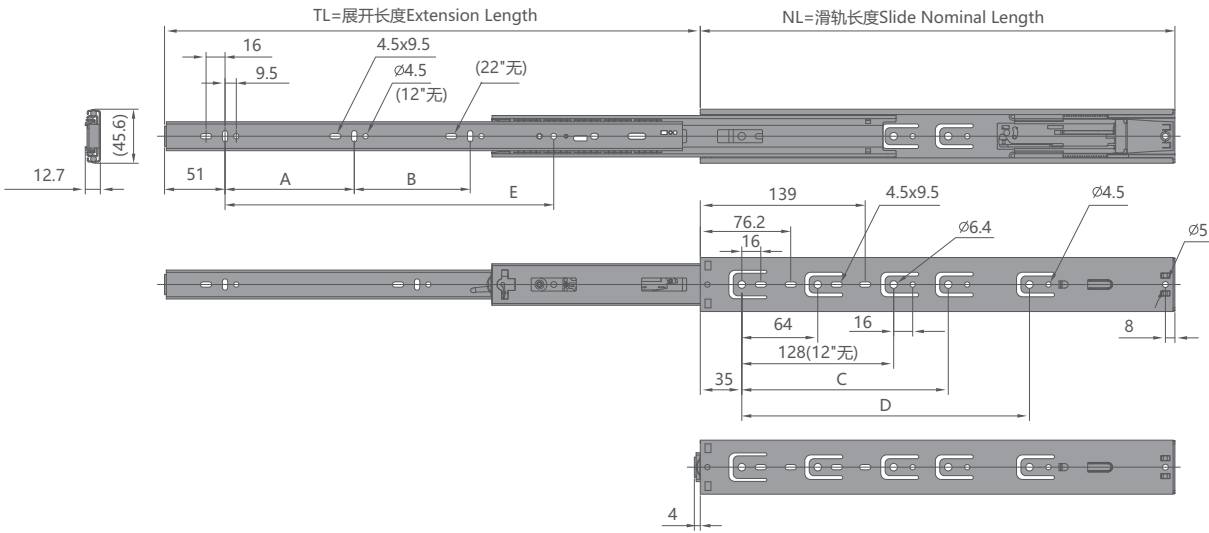

产品型号 Item No.	滑轨长度L Length	展开长度TL Length	A	B	C	D	E	包装单位(套)/箱 Packing(set)/ctn
4531FS-300	300mm	225mm	96mm				125.5mm	15
4531FS-350	350mm	300mm	128mm				175.5mm	15
4531FS-400	400mm	375mm	128mm		192mm		225.5mm	15
4531FS-450	450mm	450mm	160mm		224mm		275.5mm	15
4531FS-500	500mm	500mm	192mm		224mm	288mm	300.5mm	15

相关信息 Relevant Information

螺丝 Screw
130页 PAGE



FULL EXTENSION SOFT CLOSE BALL BEARING SLIDE 三节阻尼钢珠滑轨

Patented damping technology,
sports car-style braking system
专利阻尼技术
跑车级刹车系统

即使推力过大，也能快速缓冲，
保持静音平稳关闭，长期使用零磨损
Even if you slam the drawer,
it can quickly buffered to maintain silence and achieve smooth closure.



三节阻尼钢珠滑轨 45mm Full extension soft close ball bearing slide



产品详情信息
Product Details




45C31S

产品介绍 Product Introduction


- 产品应用：商用与家用抽屉，及类似装置等
- 产品特点：单向全拉出，缓冲闭合
- 产品负载：25kg
- 可选长度：250mm-500mm
- 产品表面：电泳黑/蓝锌可选
- 材料厚度：1.0*1.0*1.2mm
- Application: Commercial and household drawers
- Product features: Full extension, Soft-close
- Loading capacity: 25KG
- Nominal Length: 250-500mm
- Product surface: Electroplating Bluezinc/Black
- Material thickness: 1.0*1.0*1.2mm

三节阻尼钢珠滑轨 45mm Full extension soft close ball bearing slide

空间需求 Space Requirement

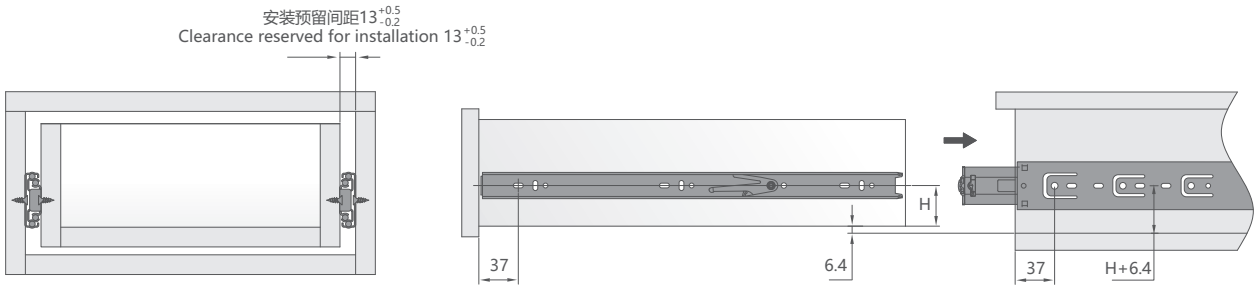

安装孔距 Drilling Pattern

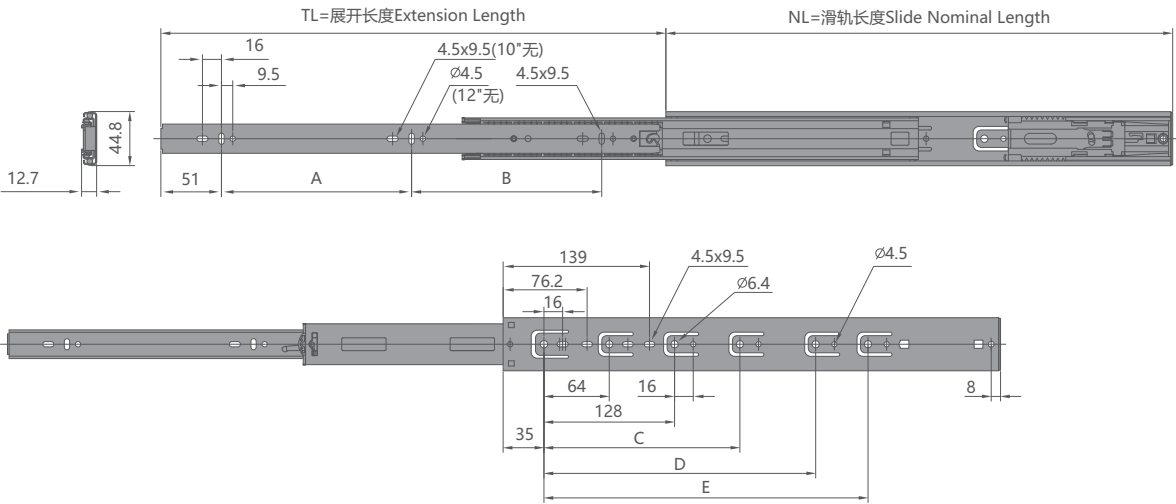

产品型号 Item No.	滑轨长度L Length	展开长度TL Length	A	B	C	D	E	包装单位(套)/箱 Packing(set)/ctn
45C31S-250	250mm	205mm	128mm					15
45C31S-300	300mm	270mm	96mm					15
45C31S-350	350mm	340mm	128mm					15
45C31S-400	400mm	400mm	128mm	160mm	192mm			15
45C31S-450	450mm	450mm	160mm	160mm	224mm			15
45C31S-500	500mm	500mm	192mm	192mm	224mm	288mm		15

相关信息 Relevant Information

螺丝 Screw

130页 PAGE



FULL EXTENSION BALL BEARING SLIDE 三节钢珠滑轨

**Solid ball, push-pull smooth
实心滚珠，推拉顺滑**

双排钢珠联动滑行，享受静谧与顺滑。
Double row of steel balls sliding together,
Enjoy the quiet and smooth.



三节钢珠滑轨 Full extension ball bearing slide




45C31

产品介绍 Product Introduction


- 产品应用：商用与家用抽屉，及类似装置等
- 产品特点：单向全拉出
- 产品负载：25kg
- 可选长度：250mm-500mm
- 产品表面：电泳黑/蓝锌可选
- 材料厚度：1.0*1.0*1.2mm
- Application: Commercial and household drawers
- Product features: Full extension, Soft-close
- Loading capacity: 25KG
- Nominal Length: 250-500mm
- Product surface: Electroplating Bluezinc/Black
- Material thickness: 1.0*1.0*1.2mm

三节钢珠滑轨 Full extension ball bearing slide

空间需求 Space Requirement

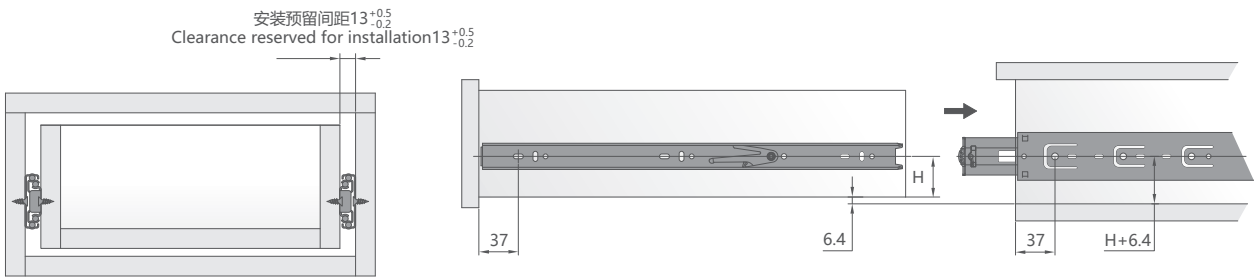

安装孔距 Drilling Pattern

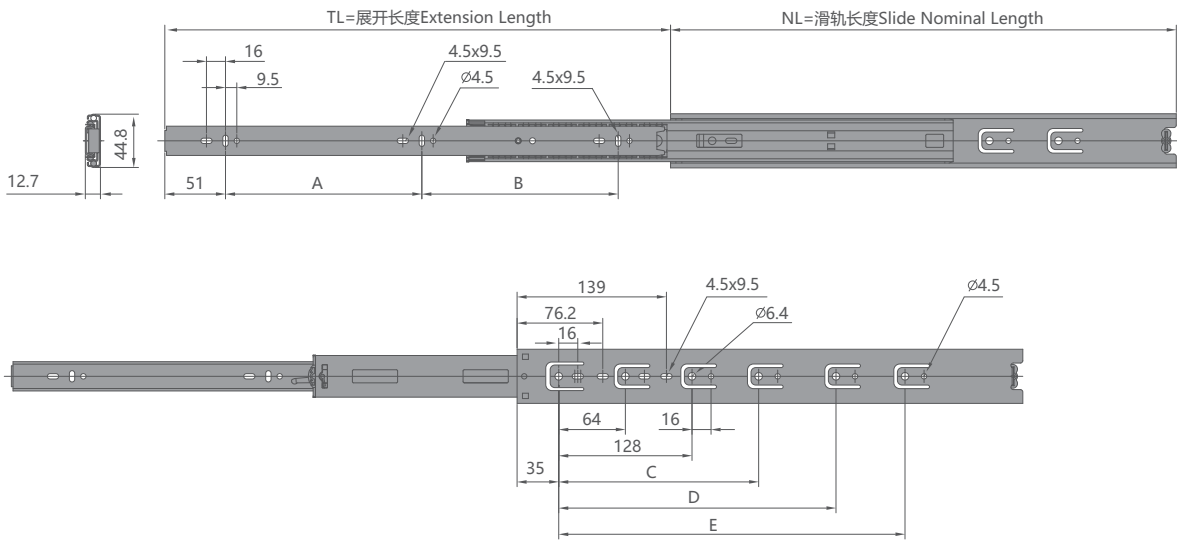

产品型号 Item No.	滑轨长度L Length	展开长度TL Length	A	B	C	D	E	包装单位(套)/箱 Packing(set)/ctn
45C31-250	250mm	250mm	170mm					15
45C31-300	300mm	300mm	96mm	128mm	224mm			15
45C31-350	350mm	350mm	128mm	128mm	224mm			15
45C31-400	400mm	400mm	128mm	192mm	224mm	288mm		15
45C31-450	450mm	450mm	160mm	192mm	224mm	352mm		15
45C31-500	500mm	500mm	192mm	224mm	224mm	352mm	416mm	15

相关信息 Relevant Information

螺丝 Screw
130页 PAGE



FULL EXTENSION UNDER MOUNTED SOFT CLOSE SLIDE

三节隐藏式缓冲滑轨

Smooth Gliding, Stable Performance

滑动轻盈，运行稳定

天斯三节隐藏式缓冲滑轨，三节全拉出，抽屉一览无余，带连接件，快装快拆，且拥有强大的调节功能，关闭缓冲静谧，尽享抽屉顺滑轻盈体验！

The Tincee full extension, under-mounted soft-close slide comes equipped with connectors for quick installation and removal. It offers powerful adjustment capabilities and features quiet, cushioned closing for enhanced user experience.



三节同步阻尼隐藏滑轨-5D调节 (带安装把手) Synchronized Full Extension Undermount Slides (5D adjustment)



产品详情信息
Product Details




YH305

产品介绍 Product Introduction


- 完美的轻柔、静音、缓冲关闭系统
- 动态负载: 35kg
- 材料厚度(内外轨): 1.8*1.5*1.0mm
- 抽屉可快速安装、拆卸, 无需工具
- 抽屉调节(5D): 上下、左右、前后、拉力、倾斜
- Perfect smooth, silent, soft closing system
- Dynamic loading capacity: 35KG
- Material thickness: 1.8*1.5*1.0mm
- Drawers can be quickly installed and removed without tools
- Drawer adjustments(5D): up/down, left/right, front/back, pull-force, tilt

三节同步阻尼隐藏滑轨-5D调节 (带安装把手) Synchronized Full Extension Undermount Slides (5D adjustment)


抽屉外盖安装尺寸 Standard Drawer Dimensions

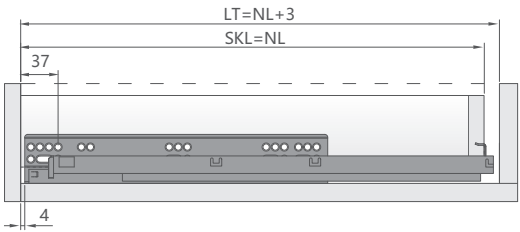


抽屉内置安装尺寸 Built-in Drawer Dimensions

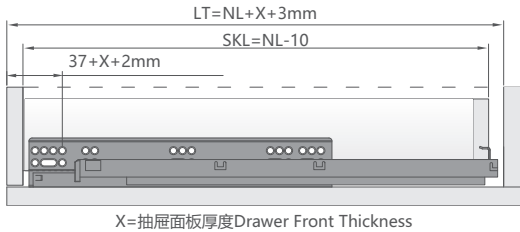


滑轨安装尺寸 Installation Dimensions

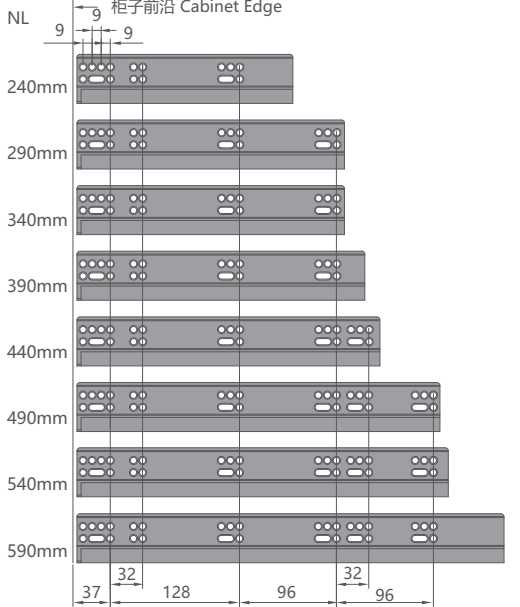

侧板厚度最大为16mm的抽屉安装尺寸
Installation for drawer with max 16mm thick drawer side

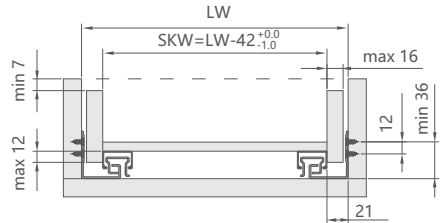


侧板厚度最大为19mm的抽屉安装尺寸
Installation for drawer with max 19mm thick drawer side

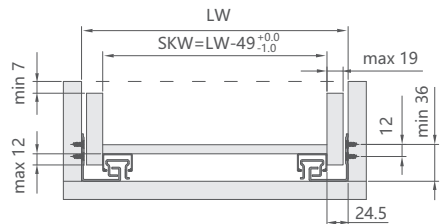


抽屉钻孔尺寸&调节功能 Drawer Hole Drilling Dimensions & Adjustment Function


抽屉钻孔尺寸
Drawer hole drillings(mm)



把手安装与调节
Handle installation and adjustments(mm)



更多调节功能
More adjustments(mm)

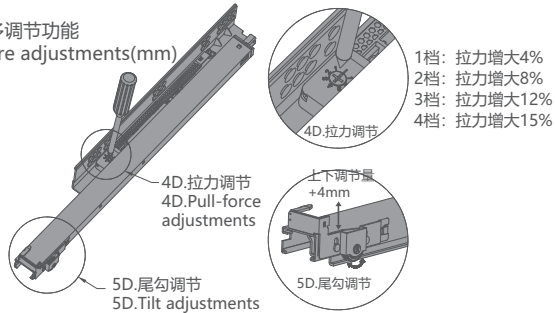

相关信息 Relevant Information

NL=滑轨标称长度 NL=Nominnal slide length	最小尺寸 Min 最大尺寸 Max
LT=柜体内部深度 LT=Cabinet inner depth (min.)	LW=柜体内部宽度 LW=Cabinet inner width
SKL=抽屉长度 SKL=Drawer length	SKW=抽屉宽度 SKW=Drawer width

螺丝 Screw

130页 PAGE

产品型号 Item No.(max 16mm)	产品型号 Item No.(max 19mm)	滑轨长度L Length	套/箱 Set/Ctn
YH30516-250	YH30519-250	250mm	10
YH30516-300	YH30519-300	300mm	10
YH30516-350	YH30519-350	350mm	10
YH30516-400	YH30519-400	400mm	10
YH30516-450	YH30519-450	450mm	10
YH30516-500	YH30519-500	500mm	10
YH30516-550	YH30519-550	550mm	10
YH30516-600	YH30519-600	600mm	10

三节同步阻尼隐藏滑轨-3D调节 (带安装把手) Synchronized Full Extension Undermount Slides (3D adjustment)




YH304

产品介绍 Product Introduction


- 完美的轻柔、静音、缓冲关闭系统
- 动态负载：35kg
- 材料厚度(内外轨)：1.8*1.5*1.0mm
- 抽屉可快速安装、拆卸，无需工具
- 抽屉高度调节：0~+3mm
- Perfect smooth, silent, soft closing system
- Dynamic loading capacity: 35KG
- Material thickness: 1.8*1.5*1.0mm
- Drawers can be quickly installed and removed without tools
- Drawer height adjustment: 0~+3mm

三节同步阻尼隐藏滑轨-3D调节 (带安装把手) Synchronized Full Extension Undermount Slides (3D adjustment)


抽屉外盖安装尺寸 Standard Drawer Dimensions

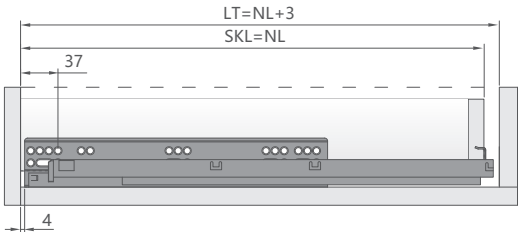


抽屉内置安装尺寸 Built-in Drawer Dimensions

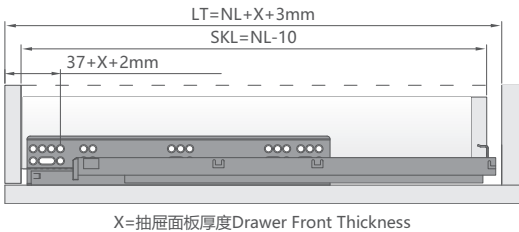


滑轨安装尺寸 Installation Dimensions

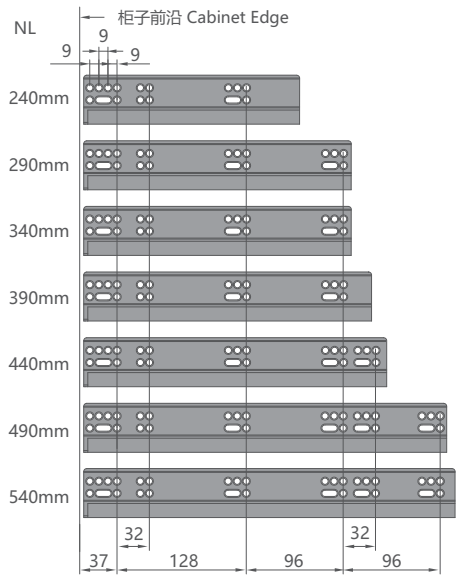


侧板厚度最大为16mm的抽屉安装尺寸
Installation for drawer with max 16mm thick drawer side

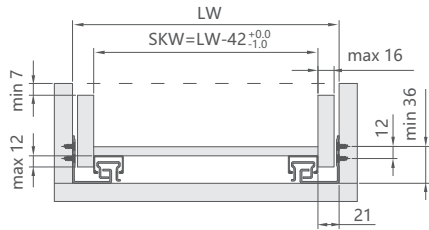


侧板厚度最大为19mm的抽屉安装尺寸
Installation for drawer with max 19mm thick drawer side

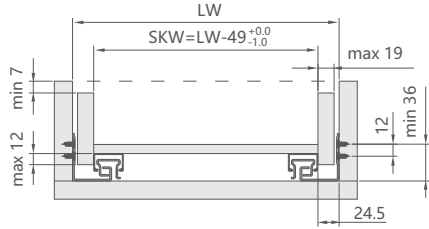

抽屉钻孔尺寸 Drawer Hole Drilling Dimensions

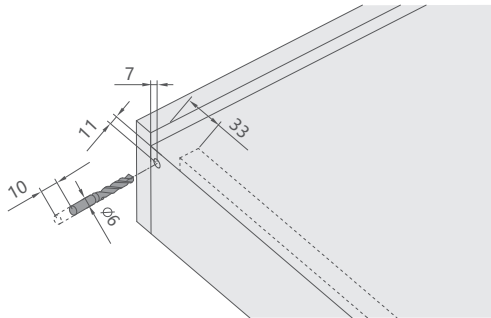

把手安装与调节 Handle Installation and Adjustment

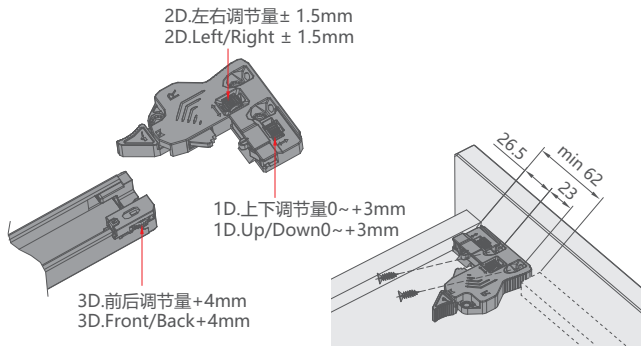


相关信息 Relevant Information

NL=滑轨标称长度 NL=Nominnal slide length	最小尺寸 Min 最大尺寸 Max
LT=柜体内部深度 LT=Cabinet inner depth (min.)	LW=柜体内部宽度 LW=Cabinet inner width
SKL=抽屉长度 SKL=Drawer length	SKW=抽屉宽度 SKW=Drawer width

螺丝 Screw
130页 PAGE

产品型号 Item No.(max 16mm)	产品型号 Item No.(max 19mm)	滑轨长度L Length	套/箱 Set/Ctn
YH30416-250	YH30419-250	250mm	10
YH30416-300	YH30419-300	300mm	10
YH30416-350	YH30419-350	350mm	10
YH30416-400	YH30419-400	400mm	10
YH30416-450	YH30419-450	450mm	10
YH30416-500	YH30419-500	500mm	10
YH30416-550	YH30419-550	550mm	10
YH30416-600	YH30419-600	600mm	10

三节同步反弹隐藏滑轨-3D调节 (带安装把手) Synchronized Push-Open Full Extension Undermount Slides (3D adjustment)

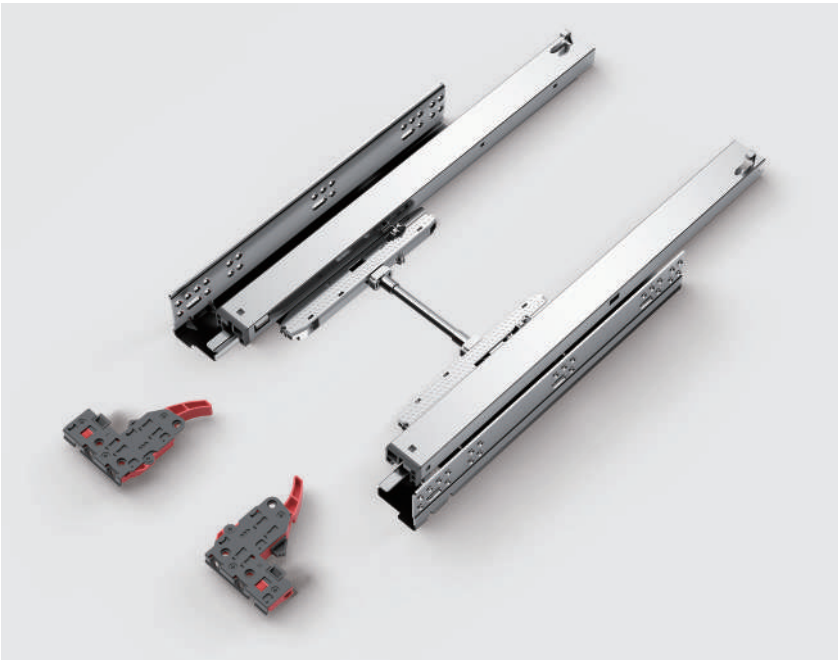


YT305

产品介绍 Product Introduction


- 完美的轻柔、静音、缓冲关闭系统
- 动态负载：35kg
- 材料厚度(内外轨)：1.8*1.5*1.0mm
- 抽屉可快速安装、拆卸，无需工具
- 抽屉高度调节：0~+3mm
- Perfect smooth, silent, soft closing system
- Dynamic loading capacity: 35KG
- Material thickness: 1.8*1.5*1.0mm
- Drawers can be quickly installed and removed without tools
- Drawer height adjustment: 0~+3mm

三节同步反弹隐藏滑轨-3D调节 (带安装把手) Synchronized Push-Open Full Extension Undermount Slides (3D adjustment)


抽屉外盖安装尺寸 Standard Drawer Dimensions

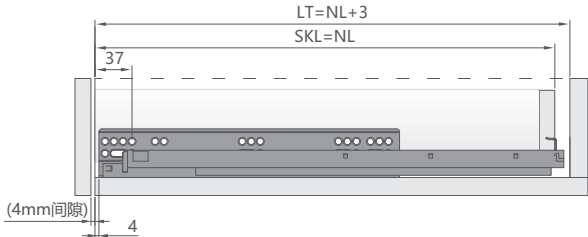


抽屉内置安装尺寸 Built-in Drawer Dimensions

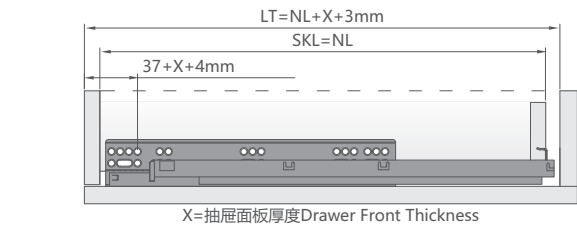


滑轨安装尺寸 Installation Dimensions

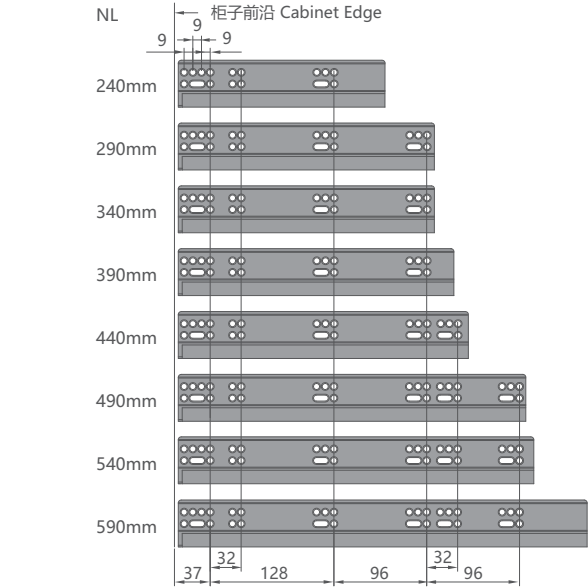


侧板厚度最大为16mm的抽屉安装尺寸
Installation for drawer with max 16mm thick drawer side

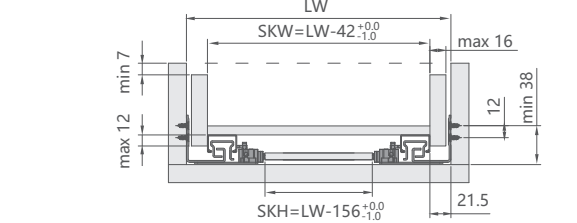


侧板厚度最大为19mm的抽屉安装尺寸
Installation for drawer with max 19mm thick drawer side

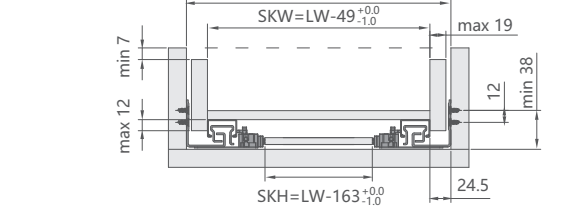

抽屉钻孔尺寸&调节功能 Drawer Hole Drilling Dimensions & Adjustment Function

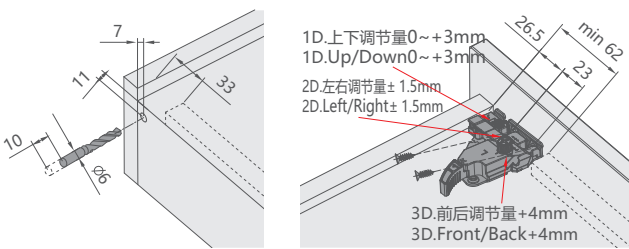

同步杆安装步骤 Synchronization Rod Installation Steps

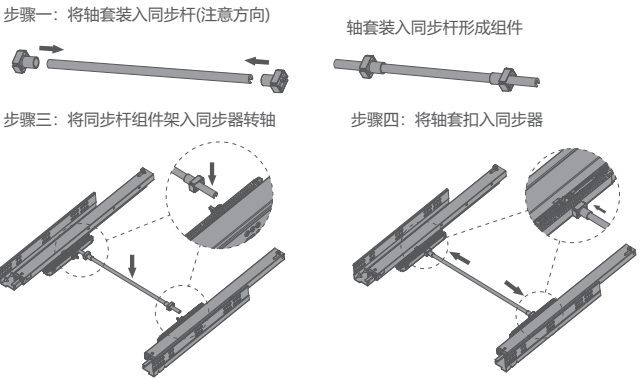

相关信息 Relevant Information

NL=滑轨标称长度 NL=Nominnal slide length	最小尺寸 Min 最大尺寸 Max
LT=柜体内部深度 LT=Cabinet inner depth (min.)	LW=柜体内部宽度 LW=Cabinet inner width
SKL=抽屉长度 SKL=Drawer length	SKW=抽屉宽度 SKW=Drawer width
螺丝 Screw	
130页 PAGE	

产品型号 Item No.(max 16mm)	产品型号 Item No.(max 19mm)	滑轨长度L Length	套/箱 Set/Ctn
YT30516-250	YT30519-250	250mm	10
YT30516-300	YT30519-300	300mm	10
YT30516-350	YT30519-350	350mm	10
YT30516-400	YT30519-400	400mm	10
YT30516-450	YT30519-450	450mm	10
YT30516-500	YT30519-500	500mm	10
YT30516-550	YT30519-550	550mm	10
YT30516-600	YT30519-600	600mm	10

美式三节同步阻尼隐藏滑轨-3D调节 (带安装把手) Face Frame Undermount Slides (3D adjustment)




YH303

产品介绍 Product Introduction


- 完美的轻柔、静音、缓冲关闭系统
- 动态负载：35kg
- 材料厚度(内外轨)：1.8*1.5*1.0mm
- 抽屉可快速安装、拆卸，无需工具
- 抽屉高度调节：0~+3mm
- Perfect smooth, silent, soft closing system
- Dynamic loading capacity: 35KG
- Material thickness: 1.8*1.5*1.0mm
- Drawers can be quickly installed and removed without tools
- Drawer height adjustment: 0~+3mm

美式三节同步阻尼隐藏滑轨-3D调节 (带安装把手) Face Frame Undermount Slides (3D adjustment)


柜体安装所需空间 Required Space for Cabinet Installation

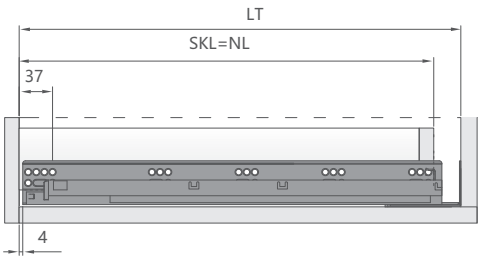


侧板厚度最大为16mm的抽屉安装尺寸
Installation for drawer with max 16mm thick drawer side

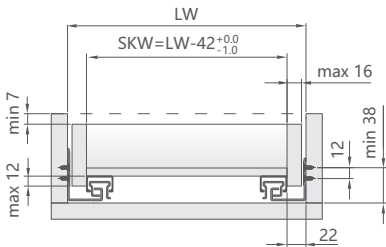

滑轨安装尺寸 Installation Dimensions

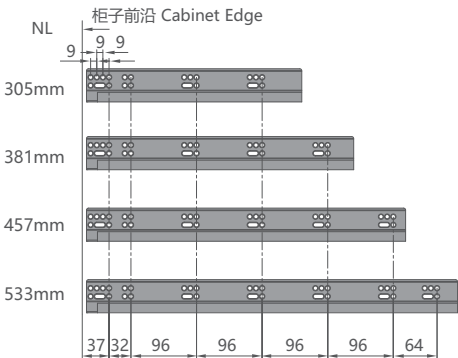


托架安装数据 Bracket Installation Data

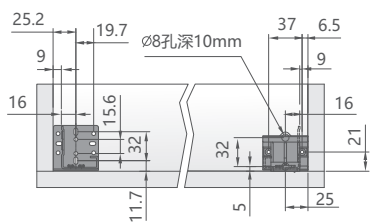


铁尾支架 Metal Rear Bracket 塑胶尾支架 Plastic Rear Bracket

抽屉钻孔尺寸 Drawer Hole Drilling Dimensions

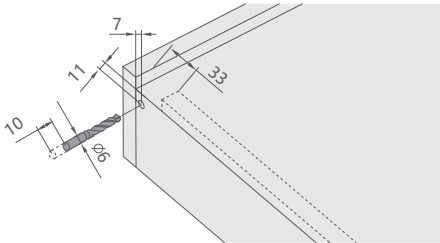

把手安装与调节 Handle Installation and Adjustment

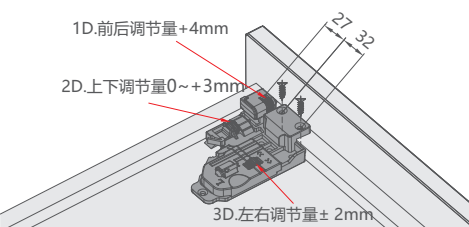

相关信息 Relevant Information

NL=滑轨标称长度
NL=Nominnal slide length

LT=柜体内部深度
LT=Cabinet inner depth (min.)

SKL=抽屉长度
SKL=Drawer length

最小尺寸 Min
最大尺寸 Max

LW=柜体内部宽度
LW=Cabinet inner width

SKW=抽屉宽度
SKW=Drawer width

螺丝 Screw

130页 PAGE

产品型号 Item No.(max 16mm)	产品型号 Item No.(max 19mm)	滑轨长度L Length	最小柜体内部深度 LT min	最大柜体内部深度 LT max	套/箱 Set/Ctn
YH30316-305	YH30319-305	305mm	339mm	359mm	10
YH30316-381	YH30319-381	381mm	416mm	436mm	10
YH30316-457	YH30319-457	457mm	494mm	514mm	10
YH30316-533	YH30319-533	533mm	568mm	588mm	10



7/8 SINGLE EXTENSION UNDER MOUNTED SOFT CLOSE SLIDE

7/8两节隐藏式缓冲滑轨

Innovative Design for Easy Access

创新设计，取物方便

天斯7/8两节隐藏轨，滑动轻盈、运行稳定，承重式设计使得高抽屉、宽抽屉都能拥有顺滑轻盈的体验，全新7/8拉出款，两节轨即可达到三节拉出效果，彻底告别抽屉死角。

Tincee's 7/8 two-section concealed slides incorporate a load-bearing design, delivering a smooth and effortless experience for both tall and wide drawers.



7/8 两节隐藏式缓冲滑轨(带调节螺丝) Single extension under mounted soft close slide (with pin)



产品详情信息
Product Details




HH278

产品介绍 Product Introduction

- 完美的轻柔、静音、自动关闭系统
- 动态负载：25kg
- 材料厚度(内外轨)：1.5*1.5mm
- 抽屉可快速安装、拆卸,无需工具
- 抽屉高度调节0~+4mm
- Perfect soft, silent, automatic shutdown system
- Dynamic load: 25 kg
- Material thickness (inner and outer rails): 1.5*1.5mm
- Drawers can be quickly installed and removed without tools
- Drawer height adjustment 0~+4mm


7/8 两节隐藏式缓冲滑轨(带调节螺丝) Single extension under mounted soft close slide (with pin)

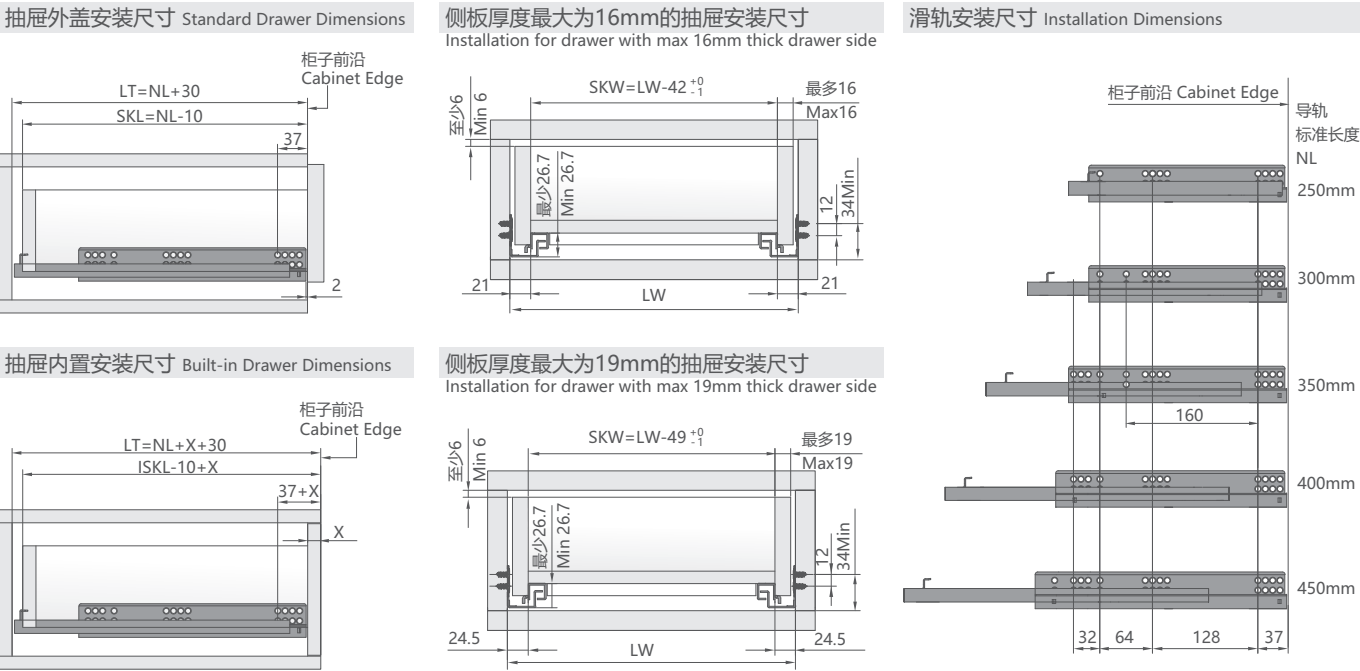

外置抽屉滑轨安装步骤示意图 (内置抽屉滑轨安装步骤及方法相同, 安装尺寸以上方法计算即可)


木抽屉背板打孔

抽屉背板打孔示意及尺寸要求

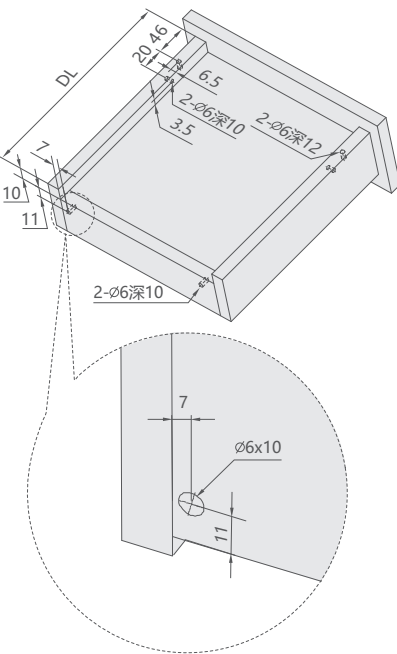


木抽屉滑轨安装

打孔位置	外置抽屉		内置抽屉			
D	37		37+X			
外置最小柜体内净深=滑轨标称长度NL+30mm 内置最小柜体内净深=滑轨标称长度NL+X+30mm						
NL	250	300	350	400	450	500
DL	240	290	340	390	440	490
C	193	246	296	346	396	446

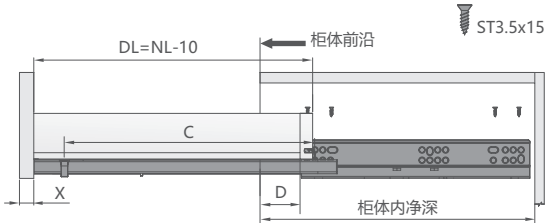

抽屉安装

- 将抽屉放在滑轨上, 再将其推入柜体, 使活动轨与卡件连接;
- 再在两滑轨内侧插入插销, 固定抽屉, 调试抽屉推拉至顺畅后完成安装。

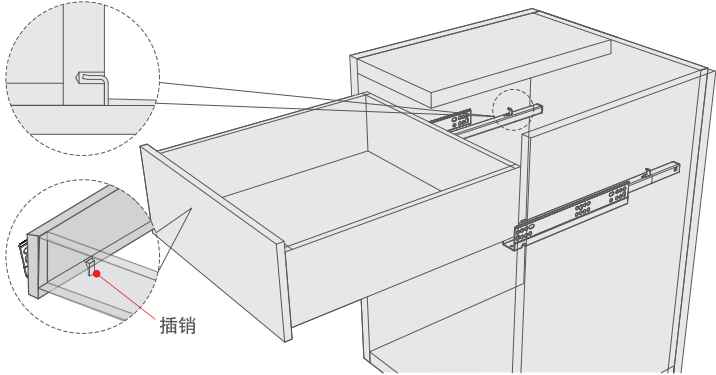

相关信息 Relevant Information

NL=导轨标准长度 NL=Nominnal slide length	X=抽屉面板厚度 X=Drawer paner thickness	SKL=抽屉深度 SKL=Drawer length	SKW=抽屉宽度 SKW=Drawer width
LT=柜体最小内部深度 LT=Cabinet inner depth (min.)	LW=柜体内部净宽 LW=Cabinet inner width	ISKL=内抽屉长度 ISKL=Drawer inner length	最小尺寸 Min 最大尺寸 Max

螺丝 Screw
130页 PAGE

产品型号 Item No.(max 16mm)	产品型号 Item No.(max 19mm)	滑轨长度L Length	套/箱 Set/Ctn
HH27816-300	HH27819-300	300mm	10
HH27816-350	HH27819-350	350mm	10
HH27816-400	HH27819-400	400mm	10
HH27816-450	HH27819-450	450mm	10



SINGLE EXTENSION UNDER MOUNTED SOFT CLOSE SLIDE 两节隐藏式缓冲滑轨

Quick installation without tools
安装快速无需工具

快速安装与拆卸，无需工具，让你的生活更便捷。
Quick installation and removal without tools makes your life easier.



两节隐藏式缓冲滑轨(带调节螺丝) Single extension under mounted soft close (with pin)




HH223

产品介绍 Product Introduction

- 完美的轻柔、静音、自动关闭系统
- 动态负载：25kg
- 材料厚度(内外轨)：1.5*1.5mm
- 抽屉可快速安装、拆卸，无需工具
- 抽屉高度调节0~+4mm
- Perfect soft, silent, automatic shutdown system
- Dynamic load: 25 kg
- Material thickness (inner and outer rails): 1.5*1.5mm
- Drawers can be quickly installed and removed without tools
- Drawer height adjustment 0~+4mm


两节隐藏式缓冲滑轨(带调节螺丝) Single extension under mounted soft close (with pin)

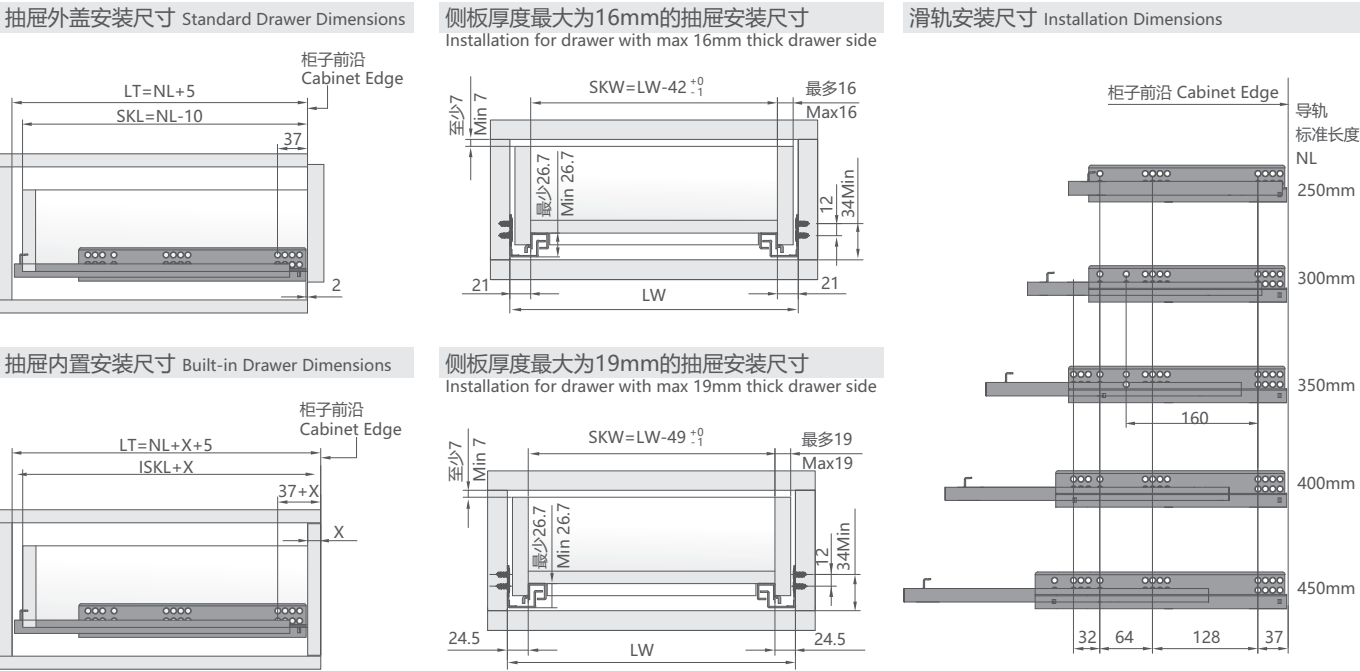

外置抽屉滑轨安装步骤示意图 (内置抽屉滑轨安装步骤及方法相同，安装尺寸以上方法计算即可)

木抽屉背板打孔

抽屉背板打孔示意及尺寸要求

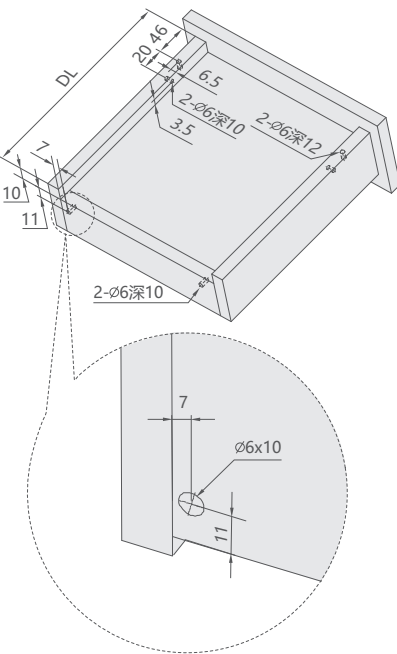


木抽屉滑轨安装

打孔位置	外置抽屉	内置抽屉
D	37	37+X


外置最小柜体内净深=滑轨标称长度NL+30mm
内置最小柜体内净深=滑轨标称长度NL+X+30mm

NL	250	300	350	400	450	500
DL	240	290	340	390	440	490
C	193	246	296	346	396	446

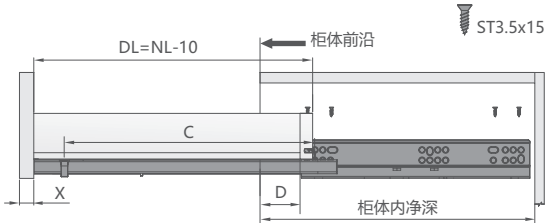

抽屉安装

- 将抽屉放在滑轨上，再将其推入柜体，使活动轨与卡件连接；
- 再在两滑轨内则插入插销，固定抽屉，调试抽屉推拉至顺畅后完成安装。

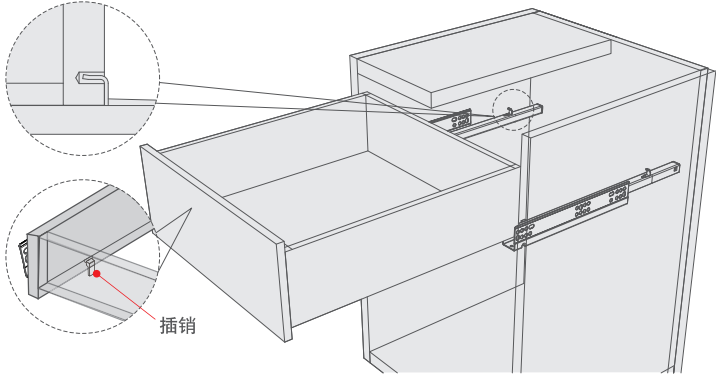

相关信息 Relevant Information

NL=导轨标准长度 NL=Nominnal slide length	X=抽屉面板厚度 X=Drawer paner thickness	SKL=抽屉深度 SKL=Drawer length	SKW=抽屉宽度 SKW=Drawer width
LT=柜体最小内部深度 LT=Cabinet inner depth (min.)	LW=柜体内部净宽 LW=Cabinet inner width	ISKL=内抽屉长度 ISKL=Drawer inner length	最小尺寸 Min 最大尺寸 Max

螺丝 Screw
130页 PAGE

产品型号 Item No.(max 16mm)	产品型号 Item No.(max 19mm)	滑轨长度L Length	套/箱 Set/Ctn
HH22316-300	HH22319-300	300mm	10
HH22316-350	HH22319-350	350mm	10
HH22316-400	HH22319-400	400mm	10
HH22316-450	HH22319-450	450mm	10



天斯 TINCÉE

DOUBLE WALL DRAWER SERIES

骑马抽系列

骑马抽、内抽使用场景主要体现在厨房、衣柜、抽屉等地方。超薄设计与抽屉相结合，方方正正使空间能够最大利用，更大的伸展空间存放物品更方便，自动缓冲的设计让您便利的同时拥有完美的体验。

The use scene of horse riding and inner pumping is mainly reflected in the kitchen, wardrobe, drawer and other places. Ultra-thin design combined with drawers, square to maximize the use of space, stretch space to store items more convenient, automatic cushioning design allows you to have a perfect experience at the same time.



DELUXE ULTRA-SLIM SOFT CLOSE DOUBLE WALL DRAWER

豪华超薄阻尼骑马抽屉

Ultra-slim double wall slide system, stereoscopic vision
超薄骑马抽滑屉，立体视觉

超薄骑马抽屉让您的抽屉体感十足，完美整体设计实现最大空间，抽帮超薄设计使抽屉一体成型，方方正正最大空间利用，存放物品更方便，让您便利的同时拥有完美的体验。The ultra-slim double wall slide system makes your drawer full of three-dimensional sense. The perfect overall design achieves the maximum space, and the ultra-slim design of the drawer makes the drawer integrally formed. The maximum space is used to store items, making it more convenient for you and have a perfect experience at the same time.



超薄骑马抽屉 Ultra-slim double wall drawer




T66

产品介绍 Product Introduction


- 超薄骑马抽滑屉，立体视觉。
- 超薄骑马抽滑屉让您的抽屉体感十足，完美整体设计实现最大空间，抽帮超薄设计使抽屉一体成型，方方正正最大空间利用，存放物品更方便，让您便利的同时拥有完美的体验。
- Ultra-slim double wall slide system, stereoscopic vision.
- The ultra-slim double wall slide system makes your drawer full of three-dimensional sense. The perfect overall design achieves the maximum space, and the ultra-slim design of the drawer makes the drawer integrally formed. The maximum space is used to store items, making it more convenient for you and have a perfect experience at the same time.

超薄骑马抽屉 Ultra-slim double wall drawer


柜体所需空间 Space Required For Cabinet

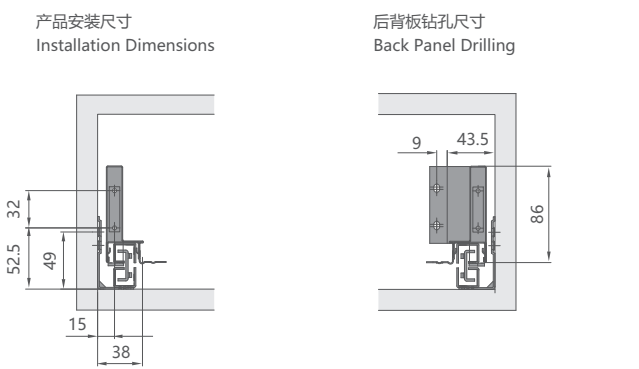


前面板钻孔尺寸 Dimensions of Front Panel Drilling

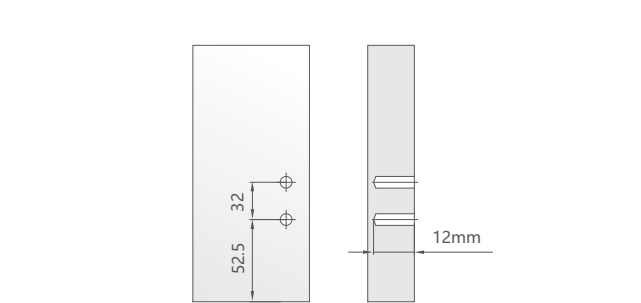


阻尼滑轨孔位图 Damping Slide Hole Position

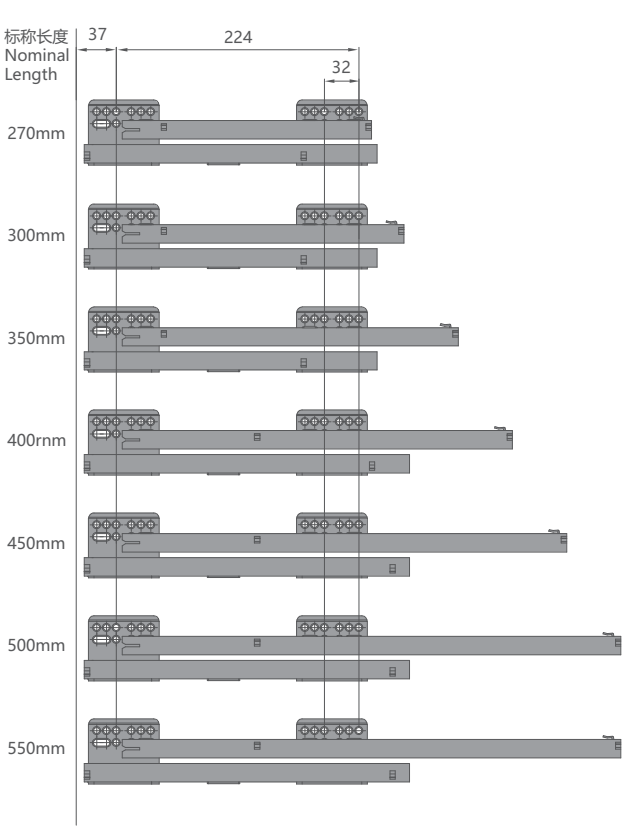

底板开板尺寸 Base Plate Size

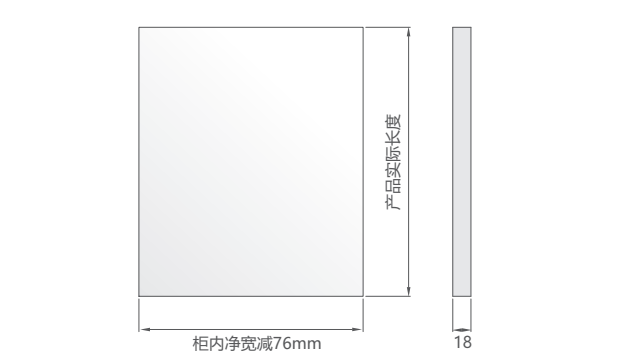

背板开板尺寸 Dimension of The Back Panel

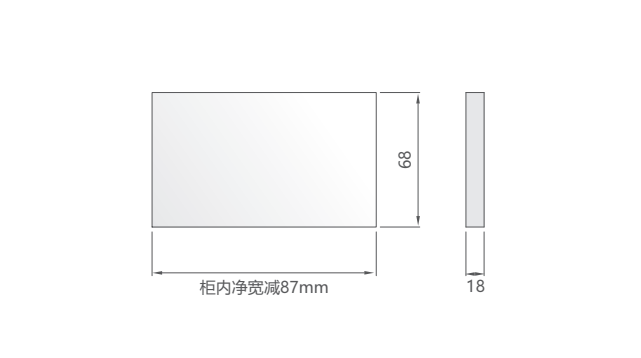

订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
T66-300D	300mm	320mm	115mm	15.3kg	6	325x345x225mm
T66-350D	350mm	370mm	115mm	16kg	6	375x345x225mm
T66-400D	400mm	420mm	115mm	18kg	6	425x345x225mm
T66-450D	450mm	470mm	115mm	19kg	6	475x345x225mm
T66-500D	500mm	520mm	115mm	20.2kg	6	525x345x225mm

超薄骑马抽屉 Ultra-slim double wall drawer




T149

产品介绍 Product Introduction


- 超薄骑马抽滑屉，立体视觉。
- 超薄骑马抽滑屉让您的抽屉体感十足，完美整体设计实现最大空间，抽帮超薄设计使抽屉一体成型，方方正正最大空间利用，存放物品更方便，让您便利的同时拥有完美的体验。
- Ultra-slim double wall slide system, stereoscopic vision.
- The ultra-slim double wall slide system makes your drawer full of three-dimensional sense. The perfect overall design achieves the maximum space, and the ultra-slim design of the drawer makes the drawer integrally formed. The maximum space is used to store items, making it more convenient for you and have a perfect experience at the same time.

超薄骑马抽屉 Ultra-slim double wall drawer


柜体所需空间 Space Required For Cabinet

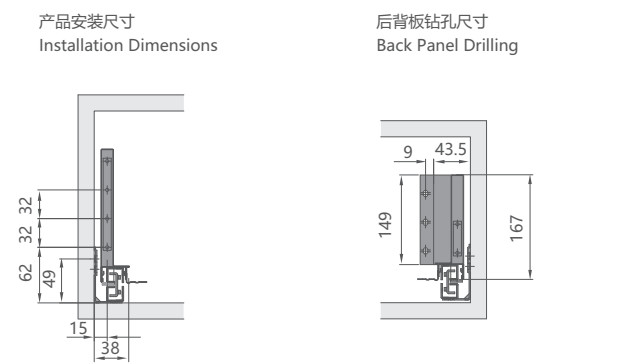


前面板钻孔尺寸 Dimensions of Front Panel Drilling

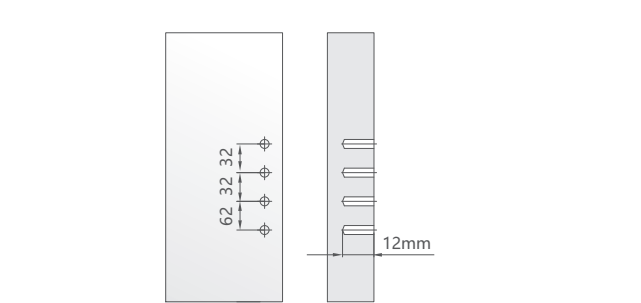


阻尼滑轨孔位图 Damping Slide Hole Position

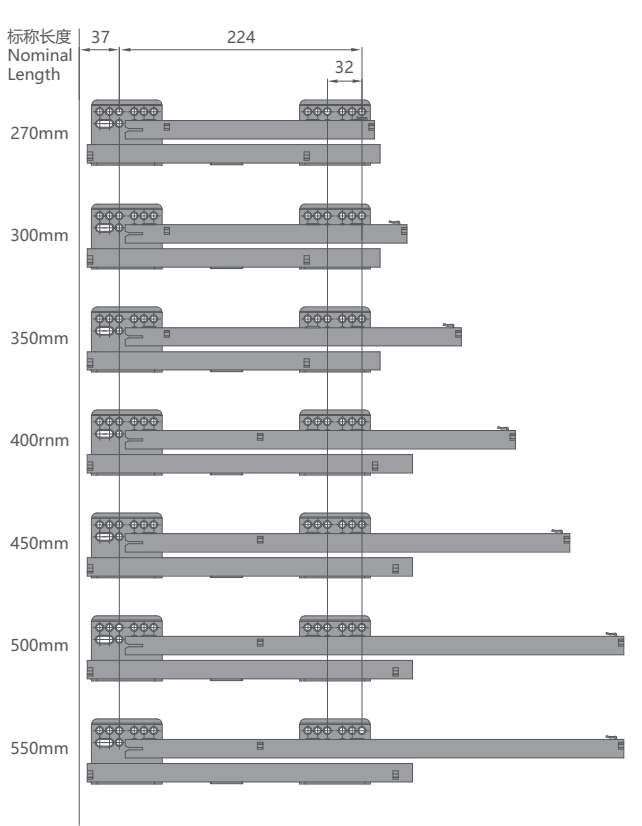

底板开板尺寸 Base Plate Size

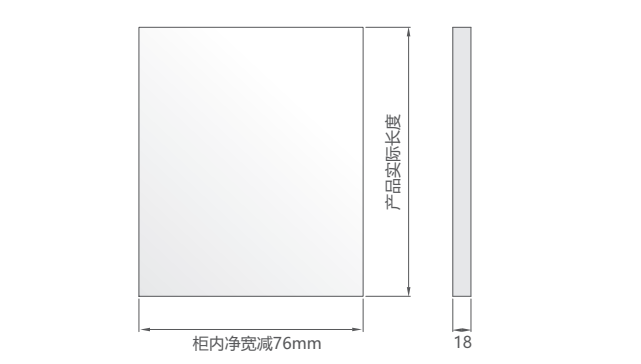

背板开板尺寸 Dimension of The Back Panel

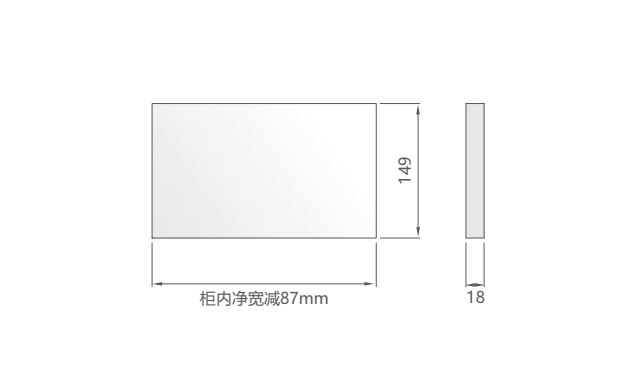

订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
T149-300Z	300mm	320mm	200mm	14.2kg	4	325x270x295mm
T149-350Z	350mm	370mm	200mm	15kg	4	375x270x295mm
T149-400Z	400mm	420mm	200mm	16.5kg	4	425x270x295mm
T149-450Z	450mm	470mm	200mm	17.9kg	4	475x270x295mm
T149-500Z	500mm	520mm	200mm	19kg	4	525x270x295mm

超薄骑马抽屉 Ultra-slim double wall drawer




T181

产品介绍 Product Introduction


- 超薄骑马抽屉，立体视觉。
- 超薄骑马抽屉让您的抽屉体感十足，完美整体设计实现最大空间，抽帮超薄设计使抽屉一体成型，方方正正最大空间利用，存放物品更方便，让您便利的同时拥有完美的体验。
- Ultra-slim double wall slide system, stereoscopic vision.
- The ultra-slim double wall slide system makes your drawer full of three-dimensional sense. The perfect overall design achieves the maximum space, and the ultra-slim design of the drawer makes the drawer integrally formed. The maximum space is used to store items, making it more convenient for you and have a perfect experience at the same time.

超薄骑马抽屉 Ultra-slim double wall drawer


柜体所需空间 Space Required For Cabinet

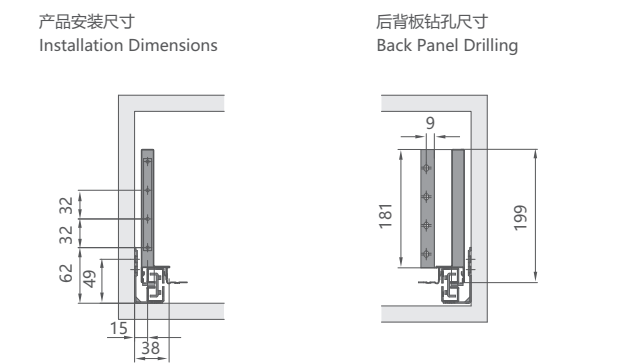


前面板钻孔尺寸 Dimensions of Front Panel Drilling

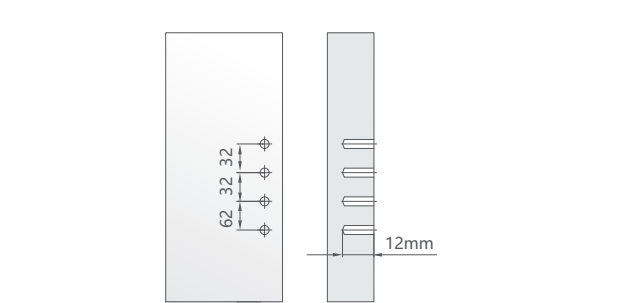


阻尼滑轨孔位图 Damping Slide Hole Position

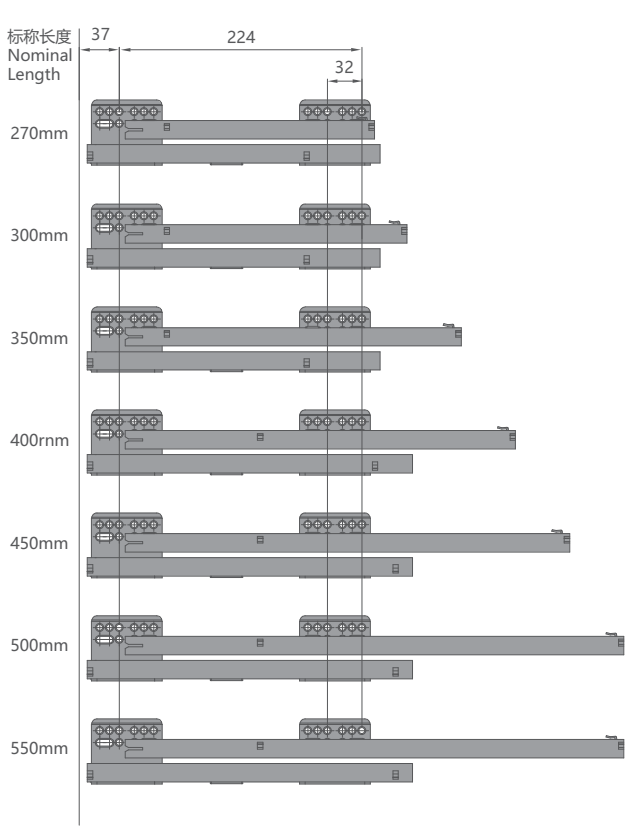

底板开板尺寸 Base Plate Size

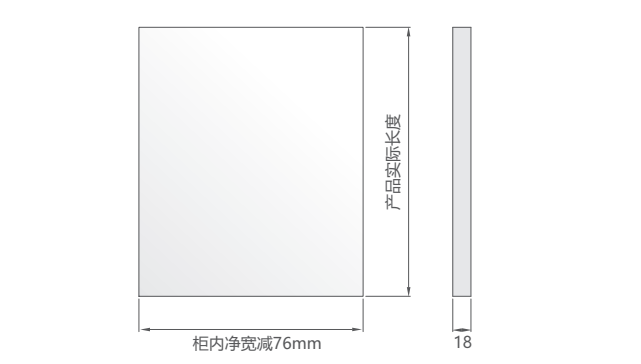

背板开板尺寸 Dimension of The Back Panel

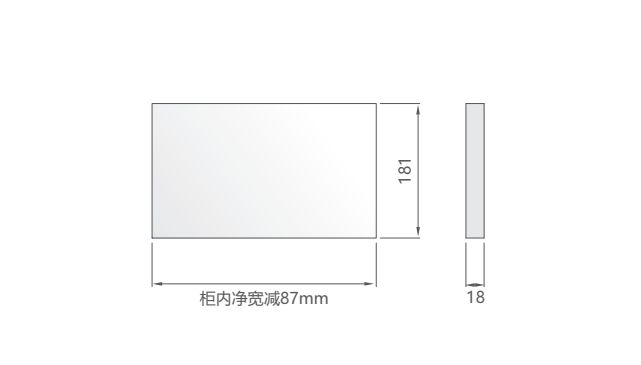

订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
T181-300G	300mm	320mm	225mm	14.8kg	4	325x290x295mm
T181-350G	350mm	370mm	225mm	15.9kg	4	375x290x295mm
T181-400G	400mm	420mm	225mm	17.5kg	4	425x290x295mm
T181-450G	450mm	470mm	225mm	18.8kg	4	475x290x295mm
T181-500G	500mm	520mm	225mm	20kg	4	525x290x295mm



DELUXE MAGIC LIGHT DOUBLE WALL DRAWER

豪华魔力灯光阻尼骑马抽屉

Magic lighting, full of science and technology

魔力灯光，科技感十足

魔力抽屉的抽帮让您的抽屉科技感十足，灯光颜色多种多样，黑夜拿取物品更方便，可增加紫外线杀菌，迎合现代家庭的需求，让您的橱柜和卫浴柜拥有不一样的抽屉。

The magic double wall makes your drawer full of science and technology. The variety of light colors make it more convenient to take items at night, increase ultraviolet sterilization, cater to the needs of modern families, and bring different drawers for your wardrobe and bathroom cabinet.



魔力灯光低帮骑马抽屉 Magic Light Low side double wall drawer




D63

产品介绍 Product Introduction


- 魔力灯光，科技感十足。
- 魔力抽屉的抽帮让您的抽屉科技感十足，灯光颜色多种多样，黑夜拿取物品更方便，可增加紫外线杀菌，迎合现代家庭的需求，让您的衣柜和卫浴柜拥有不一样的抽屉。
- Magic lighting, full of science and technology.
- The magic double wall makes your drawer full of science and technology. The variety of light colors make it more convenient to take items at night, increase ultraviolet sterilization, cater to the needs of modern families, and bring different drawers for your wardrobe and bathroom cabinet.

魔力灯光低帮骑马抽屉 Magic Light Low side double wall drawer



抽屉裁剪尺寸 Drawer cut size

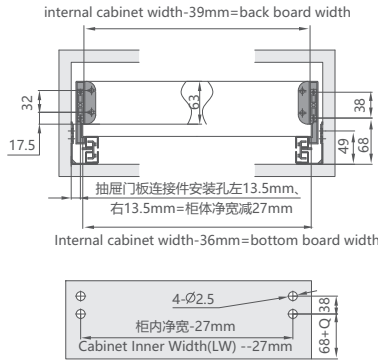

前面板钻孔尺寸 Drawer panel drilling dimensions

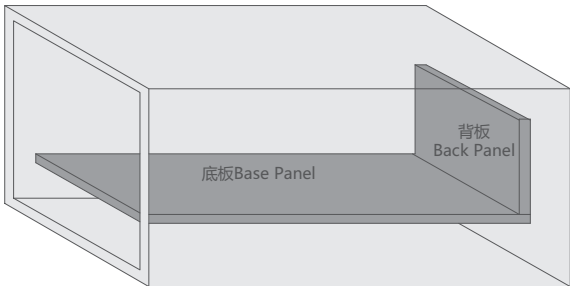

柜体轨道安装尺寸 Cabinet rail mounting dimensions

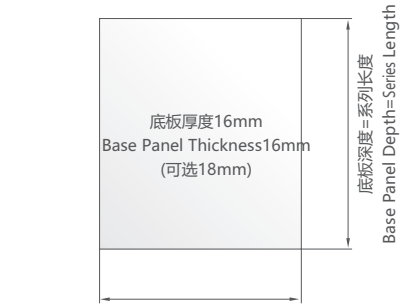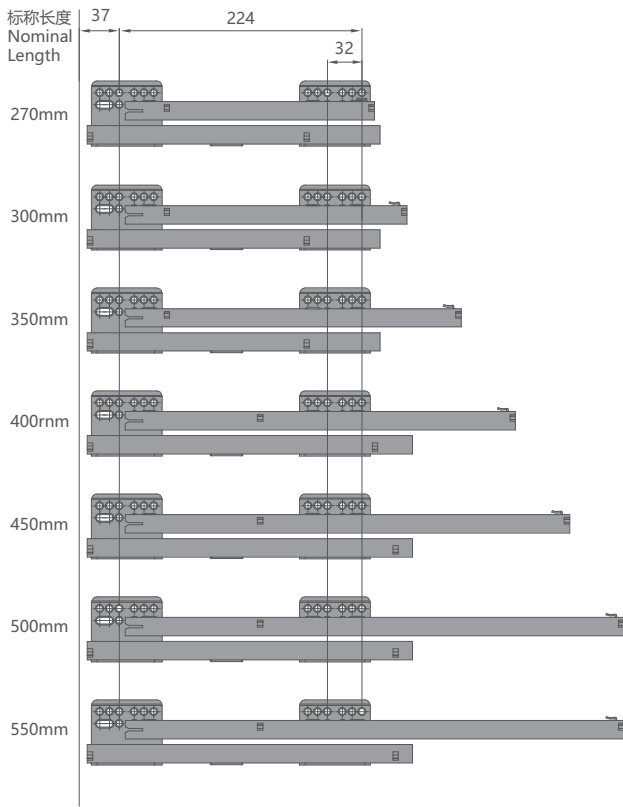

抽屉背板宽度=柜内净宽减39mm
Drawer Back Panel Width=Cabinet Inner Width(LW) -39mm
抽屉底板宽度=柜内净宽减36mm
Drawer Base Panel Width=Cabinet Inner Width(LW) -36mm
抽屉底板深度=系列长度(270、300、350、400、450、500、550)
Drawer Base Panel Depth=Series Length(270、300、350、400、450、500、550)

类别 category	背板高度 Backplane height	柜内最小安装高度 Minimum installation height in cabinet
D63	63mm	125mm
D101	101mm	165mm
D148	148mm	210mm

订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
D63-300	300mm	320mm	125mm	9.5kg	4	335x260x190mm
D63-350	350mm	370mm	125mm	11kg	4	385x260x190mm
D63-400	400mm	420mm	125mm	12.1kg	4	435x260x190mm
D63-450	450mm	470mm	125mm	13kg	4	485x260x190mm
D63-500	500mm	520mm	125mm	14.35kg	4	535x260x190mm

魔力灯光中帮骑马抽屉 Magic light side double wall drawer




D101

产品介绍 Product Introduction


- 魔力灯光,科技感十足。
- 魔力抽屉的抽帮让您的抽屉科技感十足, 灯光颜色多种多样, 黑夜拿取物品更方便, 可增加紫外线杀菌, 迎合现代家庭的需求, 让您的衣柜和卫浴柜拥有不一样的抽屉。
- Magic lighting, full of science and technology.
- The magic double wall makes your drawer full of science and technology. The variety of light colors make it more convenient to take items at night, increase ultraviolet sterilization, cater to the needs of modern families.and bring different drawers for your wardrobe and bathroom cabinet.

魔力灯光中帮骑马抽屉 Magic light side double wall drawer



抽屉裁剪尺寸 Drawercut size

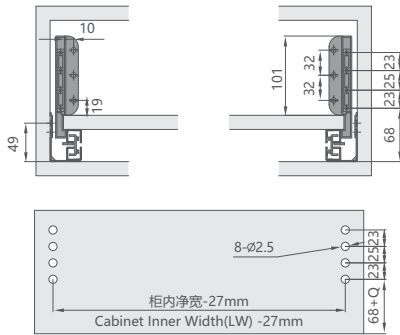

前面板钻孔尺寸 Drawer panel drilling dimensions

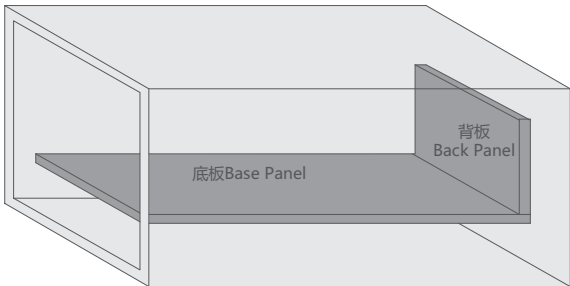

柜体轨道安装尺寸 Cabinet rail mounting dimensions

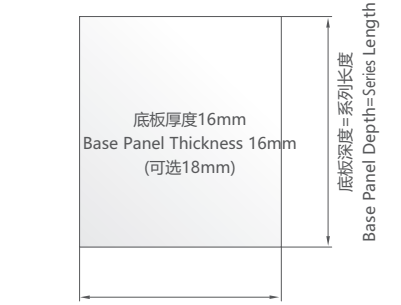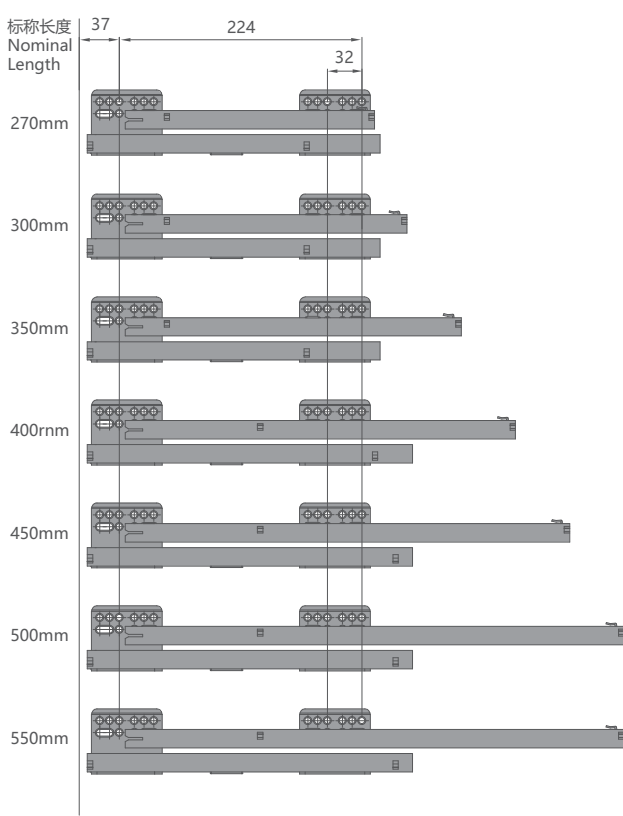

抽屉背板宽度=柜内净宽减39mm
Drawer Back Panel Width=Cabinet Inner Width(LW) -39mm
抽屉底板宽度=柜内净宽减36mm
Drawer Base Panel Width=Cabinet Inner Width(LW) -36mm
抽屉底板深度=系列长度(270、300、350、400、450、500、550)
Drawer Base Panel Depth=Series Length(270、300、350、400、450、500、550)

类别 category	背板高度 Backplane height	柜内最小安装高度 Minimum installation height in cabinet
D63	63mm	125mm
D101	101mm	165mm
D148	148mm	210mm

订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Norminal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
D101-300	300mm	320mm	165mm	11.3kg	4	335x260x220mm
D101-350	350mm	370mm	165mm	13kg	4	385x260x220mm
D101-400	400mm	420mm	165mm	14.5kg	4	435x260x220mm
D101-450	450mm	470mm	165mm	15.9kg	4	485x260x220mm
D101-500	500mm	520mm	165mm	17.3kg	4	535x260x220mm

魔力灯光高帮骑马抽屉 Magic light medium side soft close double wall drawer




D148

产品介绍 Product Introduction


- 魔力灯光科技感十足。
- 魔力抽屉的抽帮让您的抽屉科技感十足，灯光颜色多种多样，黑夜拿取物品更方便，可增加紫外线杀菌，迎合现代家庭的需求，让您的衣柜和卫浴柜拥有不一样的抽屉。
- Magic lighting, full of science and technology.
- The magic double wall makes your drawer full of science and technology. The variety of light colors make it more convenient to take items at night, increase ultraviolet sterilization, cater to the needs of modern families.and bring different drawers for your wardrobe and bathroom cabinet.

魔力灯光高帮骑马抽屉 Magic light medium side soft close double wall drawer



抽屉裁剪尺寸 Drawercut size

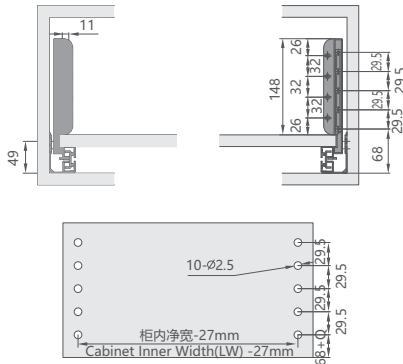

前面板钻孔尺寸 Drawer panel drilling dimensions

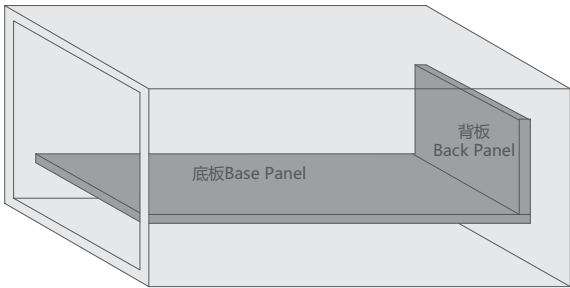

柜体轨道安装尺寸 Cabinet rail mounting dimensions

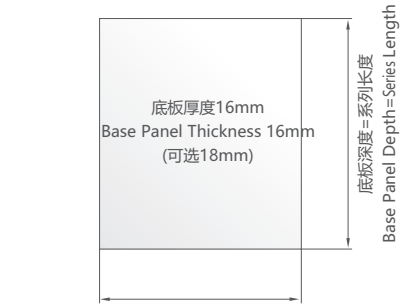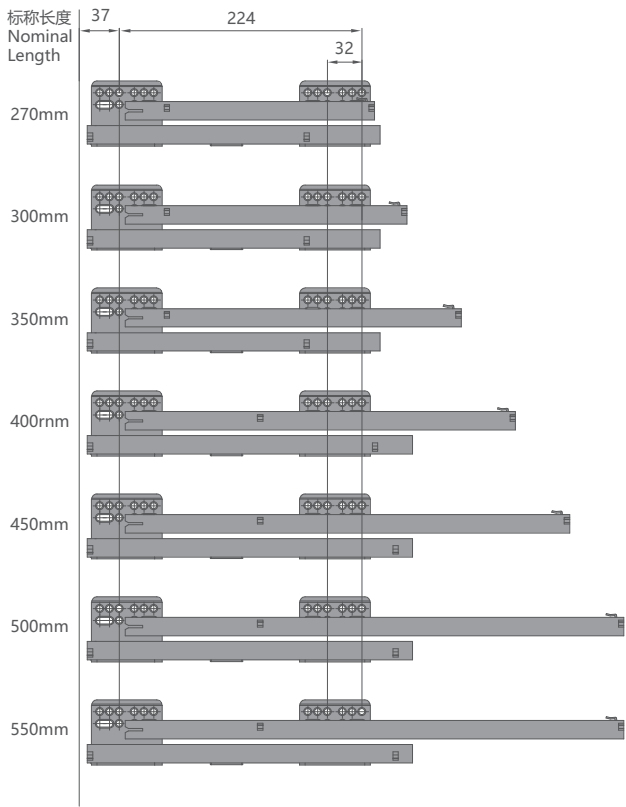

底板厚度16mm
Base Panel Thickness 16mm
(可选18mm)



背板厚度18mm
Back Thickness 18mm


抽展背板宽度=柜内净宽减39mm
Drawer Back Panel Width=Cabinet Inner Width(LW) -39mm
抽展底板宽度=柜内净宽减36mm
Drawer Base Panel Width=Cabinet Inner Width(LW) -36mm
抽展底板深度=系列长度(270、300、350、400、450、500、550)
Drawer Base Panel Depth=Series Length(270、300、350、400、450、500、550)

类别 category	背板高度 Backplane height	柜内最小安装高度 Minimum installation height in cabinet
D63	63mm	125mm
D101	101mm	165mm
D148	148mm	210mm


订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Norminal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
D148-300	300mm	320mm	210mm	13.5kg	4	335x260x260mm
D148-350	350mm	370mm	210mm	15.3kg	4	385x260x260mm
D148-400	400mm	420mm	210mm	16.9kg	4	435x260x260mm
D148-450	450mm	470mm	210mm	18.8kg	4	485x260x260mm
D148-500	500mm	520mm	210mm	20.65kg	4	535x260x260mm

魔力灯光骑马抽安装说明 Magic light double wall drawer installation

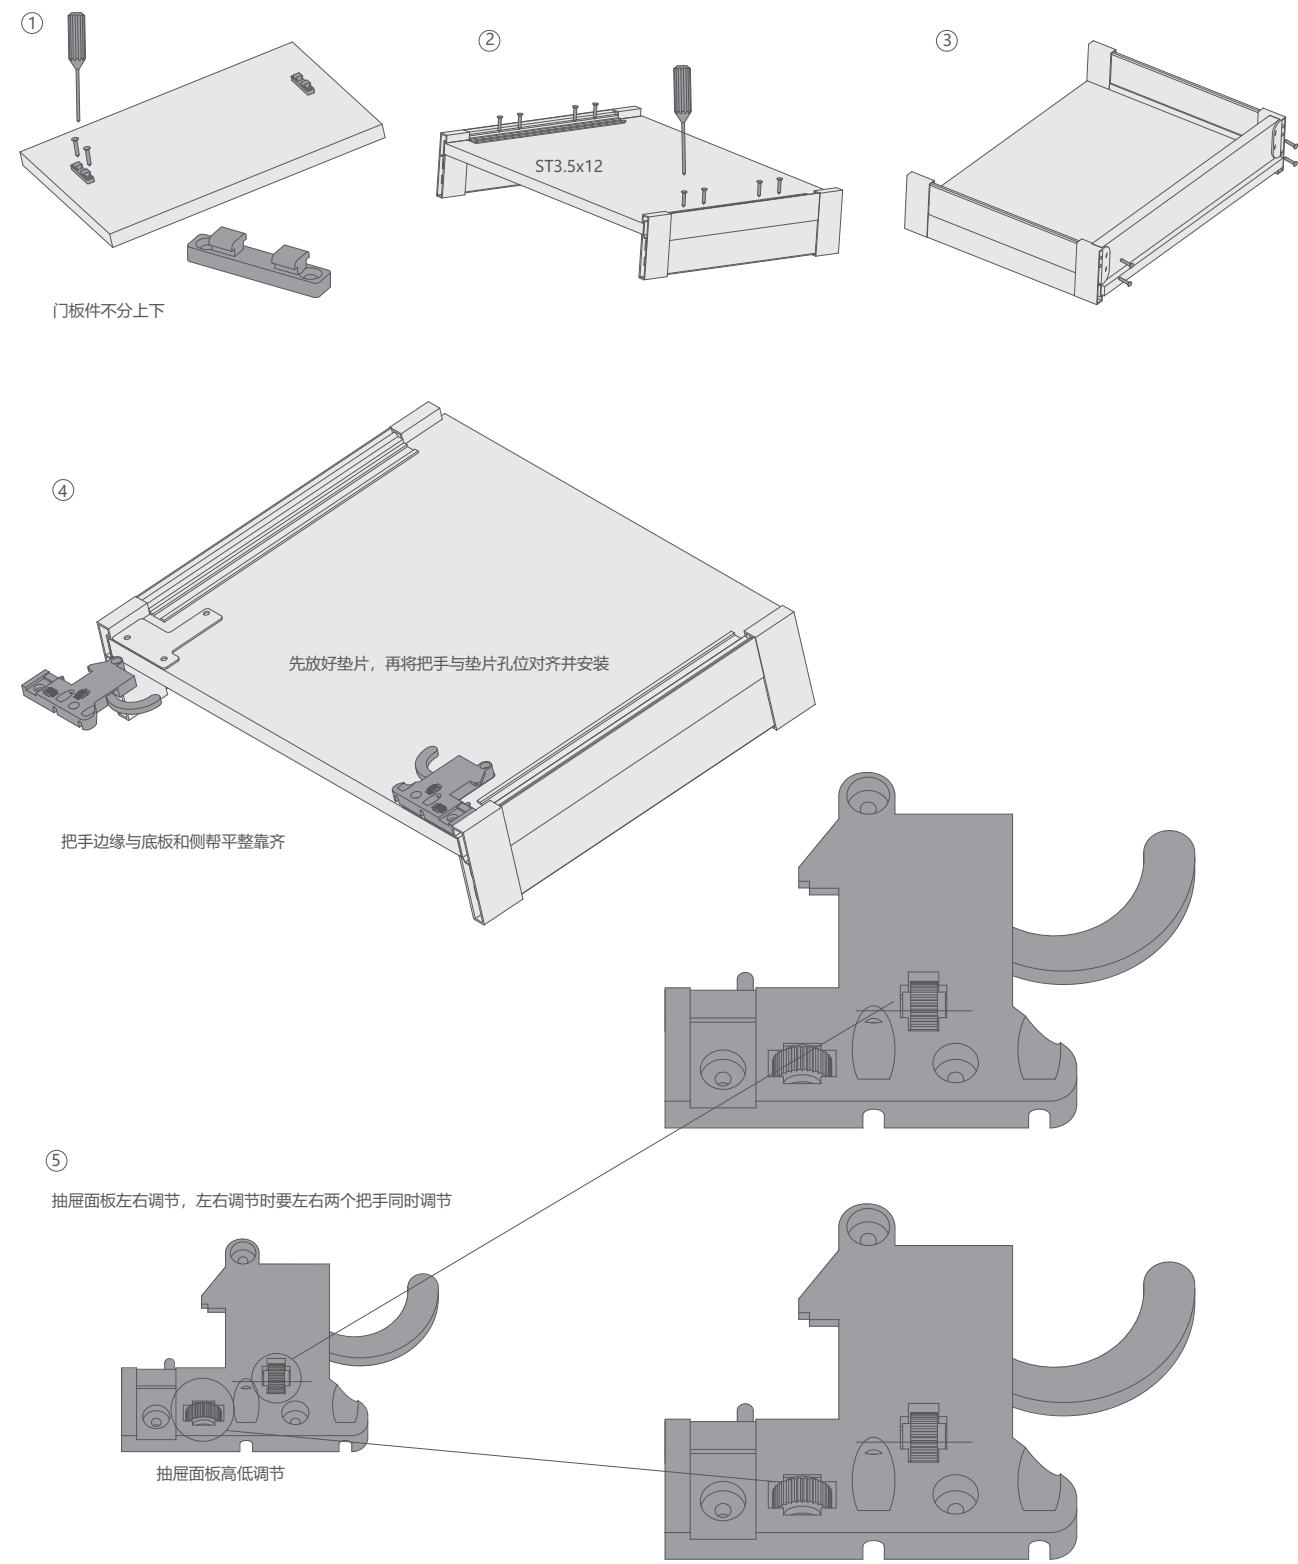

魔力灯光骑马抽安装说明 Magic light double wall drawer installation

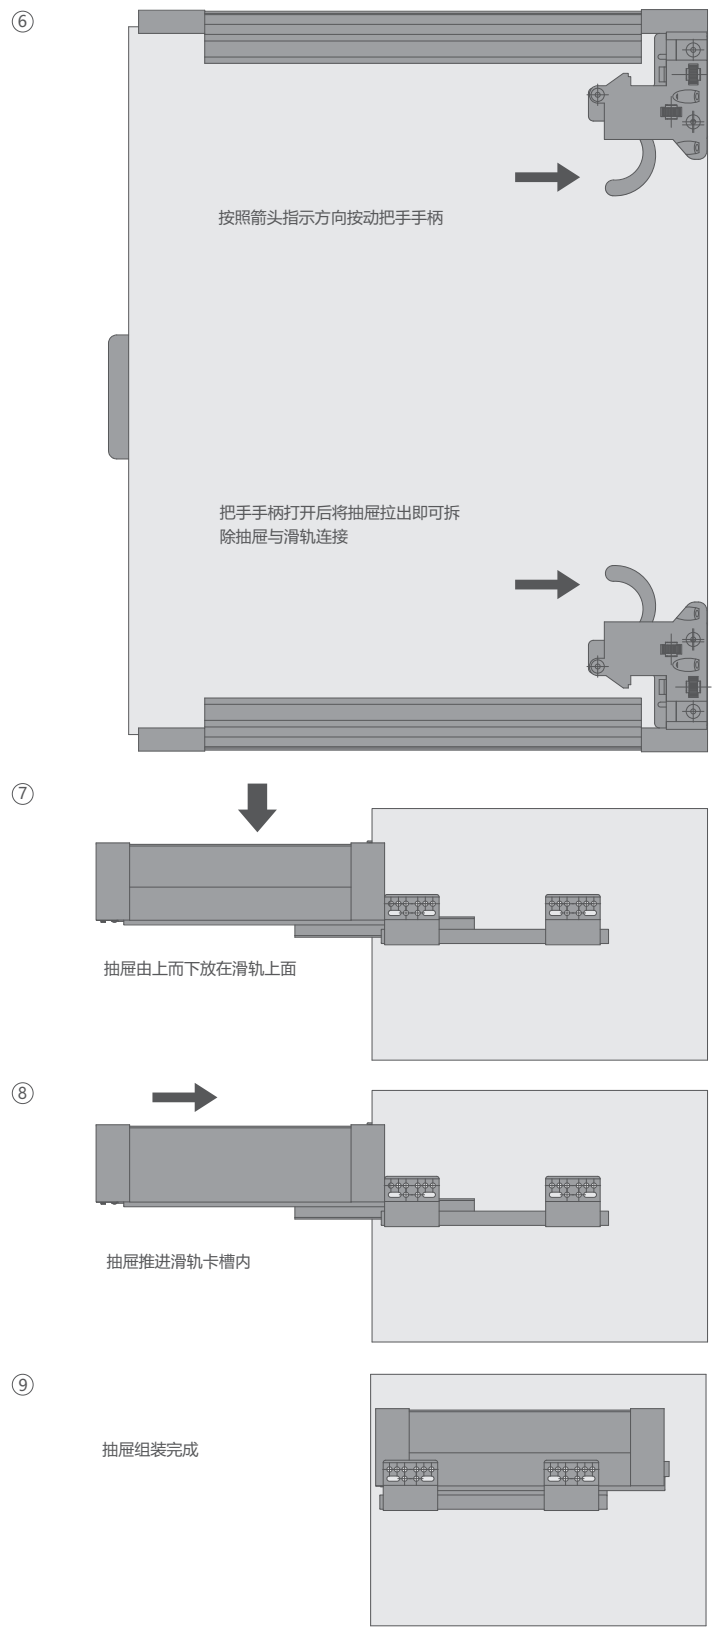



DELUXE RECTANGULAR DOUBLE WALL DRAWER

豪华方形骑马抽屉

Square rod design, high quality steel
方杆设计, 优质钢材

内置精密阻尼系统, 保证抽屉滑动轻松、静音、顺滑。
骑马抽系统抽屉呈现全拉出, 开启美好生活!

The built-in precision soft closing system ensures that the drawer moves easily, silently and smoothly.
The drawer of double wall slide system is fully pulled out to start a better life.



方形骑马抽屉 Rectangular double wall drawer




S66

产品介绍 Product Introduction


- 经久耐用，方杆设计，优质钢材，缓冲技术。
- 内置精密阻尼系统，保证抽屉滑动轻松、静音、顺滑。骑马抽系统抽屉呈现全拉出，开启美好生活！
- Durable, square rod design, high-quality steel, soft closing technology
- Built-in precision damping system, ensure the drawers slide easily, silently and smoothly, The drawer of the double wall slide system is fully pulled out to open a better life

方形骑马抽屉 Rectangular double wall drawer

柜体所需空间 Space Required For Cabinet

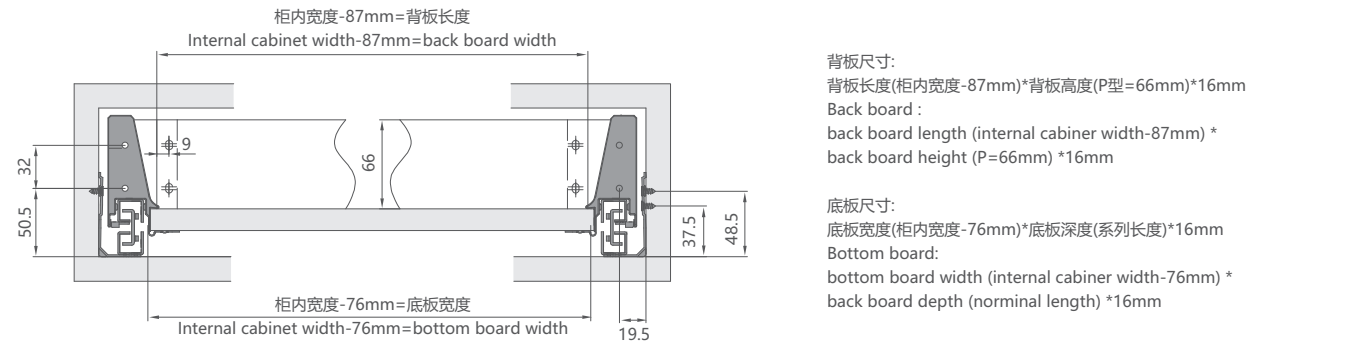

阻尼滑轨孔位图 Damping Slide Hole Position

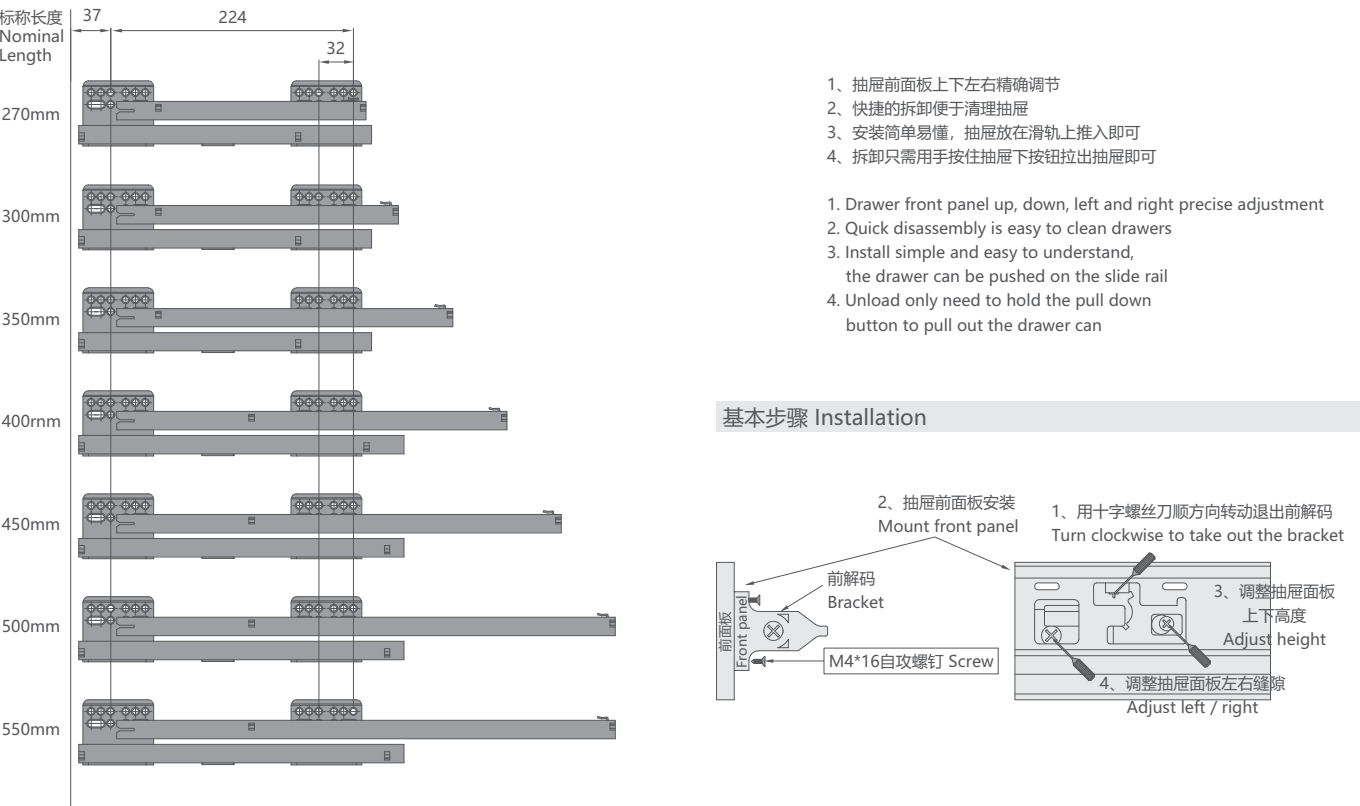

订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Norminal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
S66-300D	300mm	320mm	105mm	15.3kg	6	325x365x200mm
S66-350D	350mm	370mm	105mm	16.3kg	6	375x365x200mm
S66-400D	400mm	420mm	105mm	18kg	6	425x365x200mm
S66-450D	450mm	470mm	105mm	19.5kg	6	475x365x200mm
S66-500D	500mm	520mm	105mm	20.5kg	6	525x365x200mm

方形骑马抽屉 Rectangular double wall drawer




S140

产品介绍 Product Introduction

- 经久耐用，方杆设计，优质钢材，缓冲技术。
- 内置精密阻尼系统，保证抽屉滑动轻松、静音、顺滑。骑马抽系统抽屉呈现全拉出，开启美好生活！
- Durable, square rod design, high-quality steel, soft closing technology
- Built-in precision damping system, ensure the drawers slide easily, silently and smoothly, The drawer of the double wall slide system is fully pulled out to open a better life


方形骑马抽屉 Rectangular double wall drawer

柜体所需空间 Space Required For Cabinet

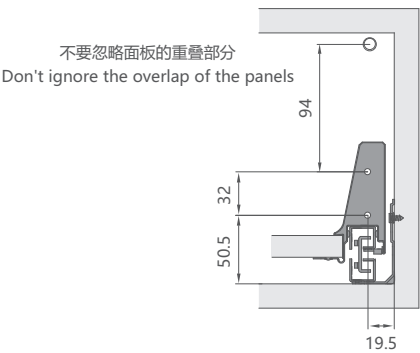


- 背板尺寸:
背板长度(柜内宽度-87mm)*背板高度(G型=142mm)*16mm
Back board :
back board length (internal cabiner width-87mm) *
back board height (G=142mm) *16mm
- 底板尺寸:
底板宽度(柜内宽度-76mm)*底板深度(系列长度)*16mm
Bottom board :
bottom board width (internal cabiner width-76mm) *
back board depth (nominal length)*16mm

阻尼滑轨孔位图 Damping Slide Hole Position

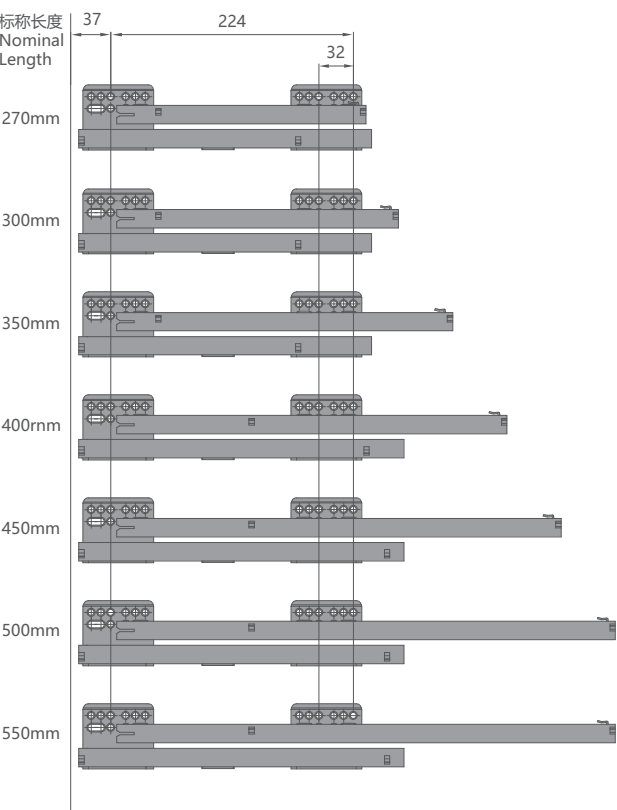

- 1、抽屉前面板上下左右精确调节
 - 2、快捷的拆卸便于清理抽屉
 - 3、安装简单易懂，抽屉放在滑轨上推入即可
 - 4、拆卸只需用手按住抽屉下按钮拉出抽屉即可
1. Drawer front panel up, down, left and right precise adjustment
 2. Quick disassembly is easy to clean drawers
 3. Install simple and easy to understand, the drawer can be pushed on the slide rail
 4. Unload only need to hold the pull down button to pull out the drawer can

基本步骤 Installation

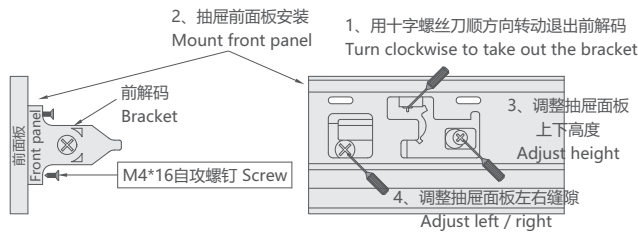

订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
S140-300Z	300mm	320mm	185mm	16kg	6	325x365x200mm
S140-350Z	350mm	370mm	185mm	17kg	6	375x365x200mm
S140-400Z	400mm	420mm	185mm	18.5kg	6	425x365x200mm
S140-450Z	450mm	470mm	185mm	20kg	6	475x365x200mm
S140-500Z	500mm	520mm	185mm	21kg	6	525x365x200mm

方形骑马抽屉 Rectangular double wall drawer



S180

产品介绍 Product Introduction


- 经久耐用，方杆设计，优质钢材，缓冲技术。
- 内置精密阻尼系统，保证抽屉滑动轻松、静音、顺滑。骑马抽系统抽屉呈现全拉出，开启美好生活！
- Durable, square rod design, high-quality steel, soft closing technology
- Built-in precision damping system, ensure the drawers slide easily, silently and smoothly, The drawer of the double wall slide system is fully pulled out to open a better life

方形骑马抽屉 Rectangular double wall drawer

柜体所需空间 Space Required For Cabinet




阻尼滑轨孔位图 Damping Slide Hole Position

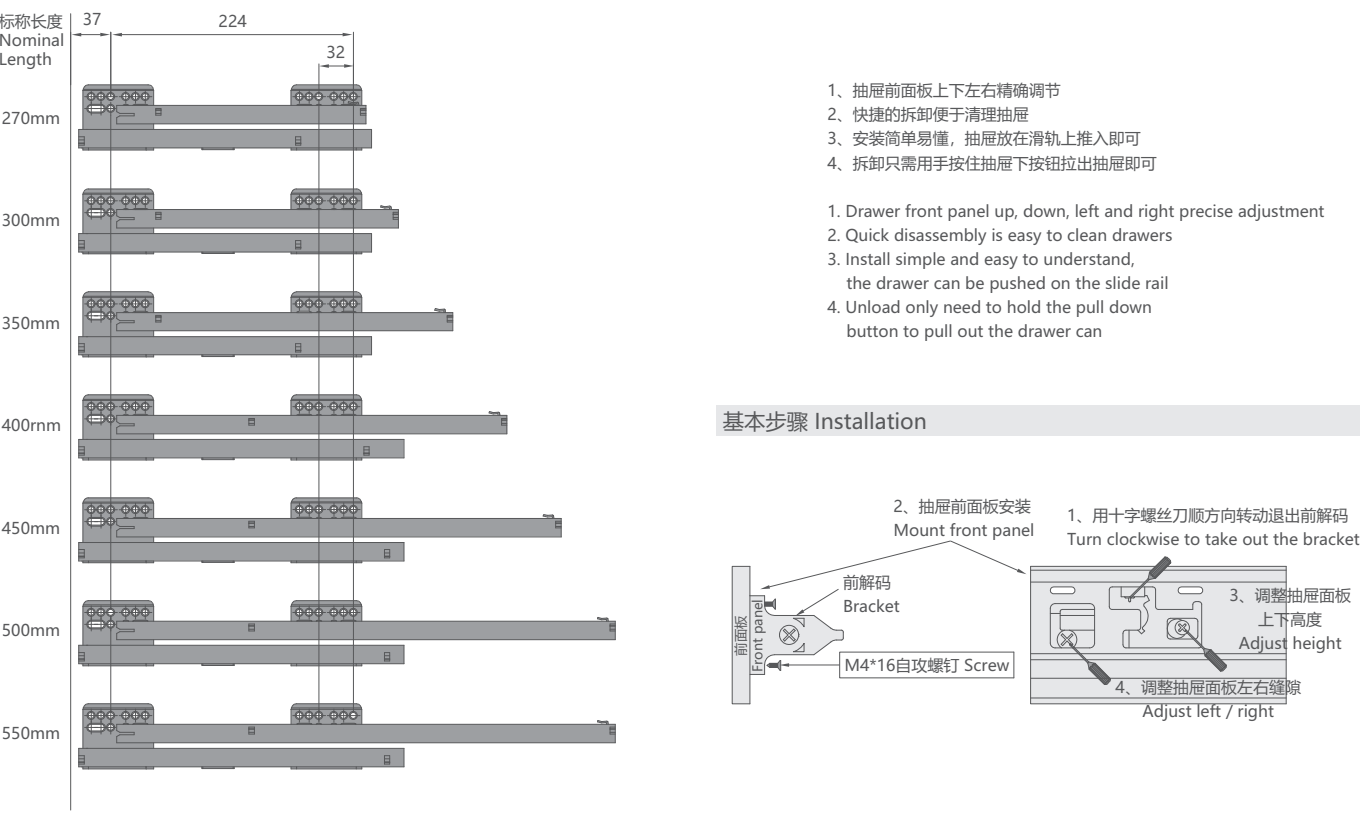


订购信息 Ordering Information

产品型号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(Kg) G.W.(kg)	每箱装数 Sets / Ctn	体积 Measurements
S180-300G	300mm	320mm	225mm	17kg	6	325x365x200mm
S180-350G	350mm	370mm	225mm	18.2kg	6	375x365x200mm
S180-400G	400mm	420mm	225mm	20.1kg	6	425x365x200mm
S180-450G	450mm	470mm	225mm	21.6kg	6	475x365x200mm
S180-500G	500mm	520mm	225mm	22.5kg	6	525x365x200mm

方形骑马抽屉安装步骤 Rectangular double wall drawer installation

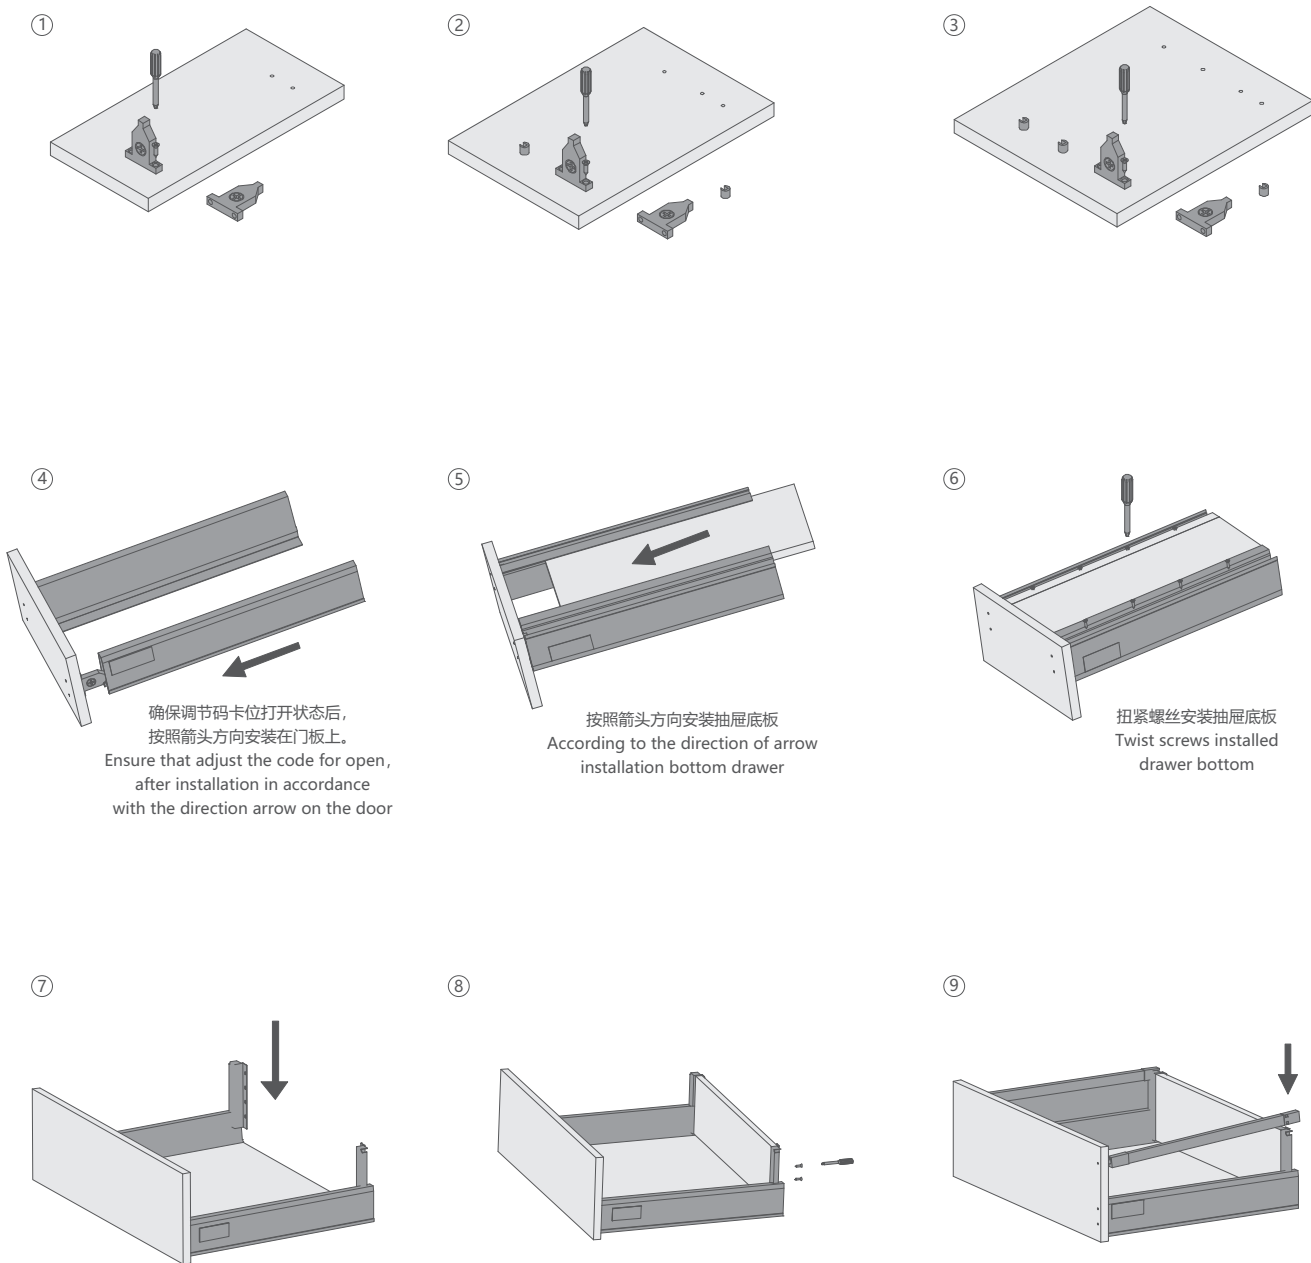

方形骑马抽屉安装步骤 Rectangular double wall drawer installation

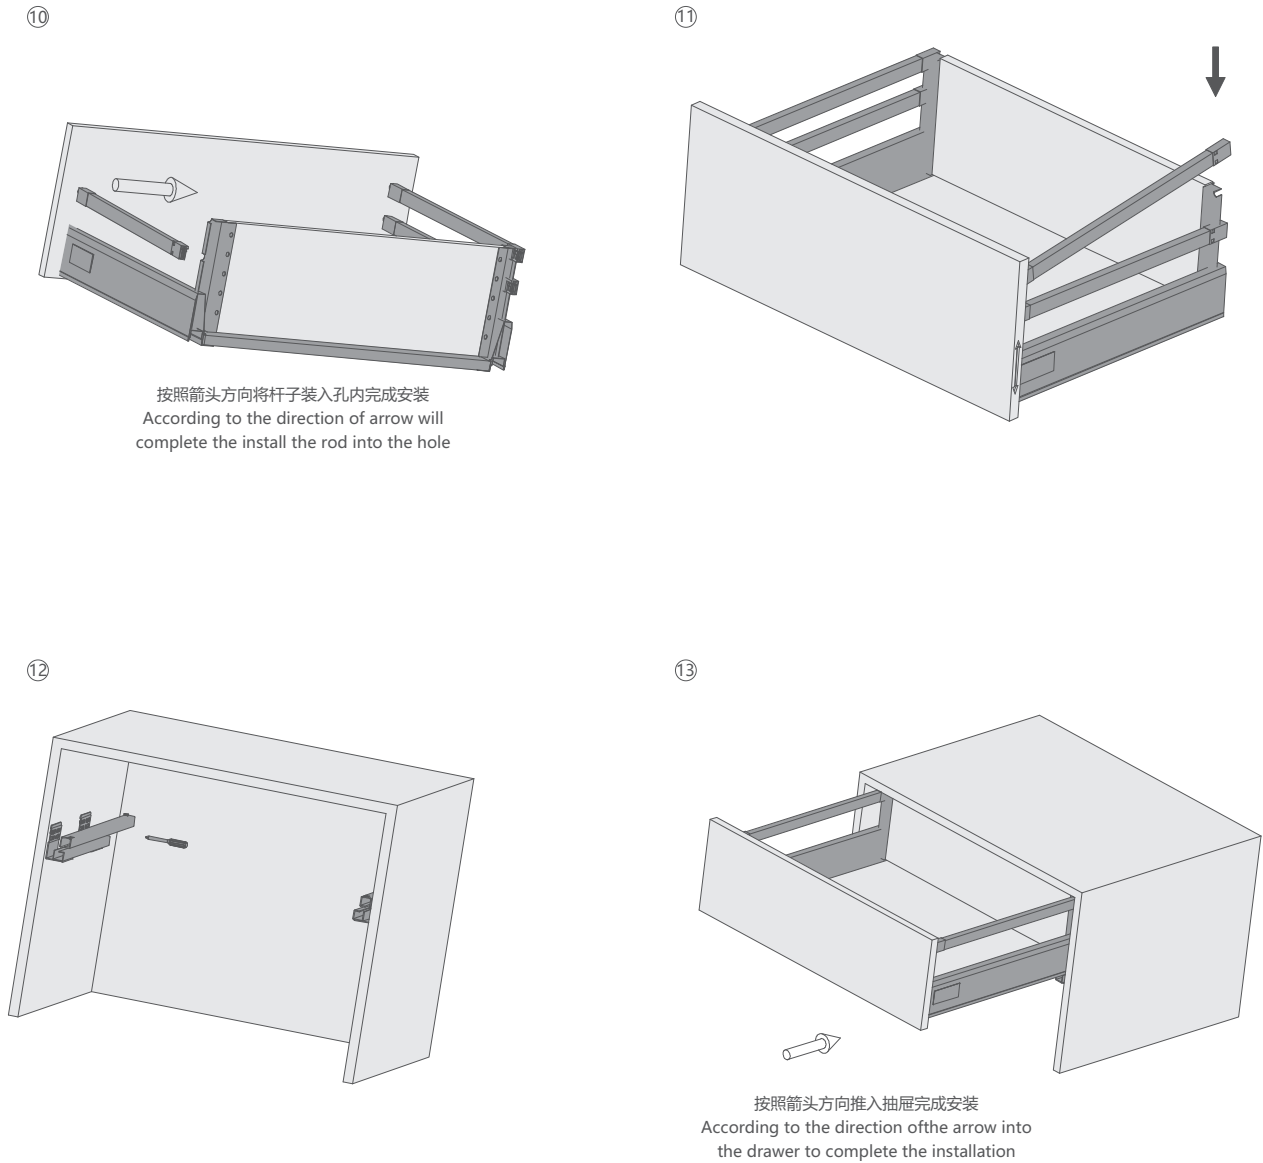




DELUXE ULTRA-SLIM SIDE INNER DRAWER BOX 薄侧帮内抽

Smoother running effect 更顺滑的运行效果

抽帮和导轨内部的细节升级之后，实现了更为顺滑的运行效果。
The details inside the drawing and guide rail have been, upgraded to achieve a smoother running effect.



薄侧帮低内抽 Slim low side panel inner drawer

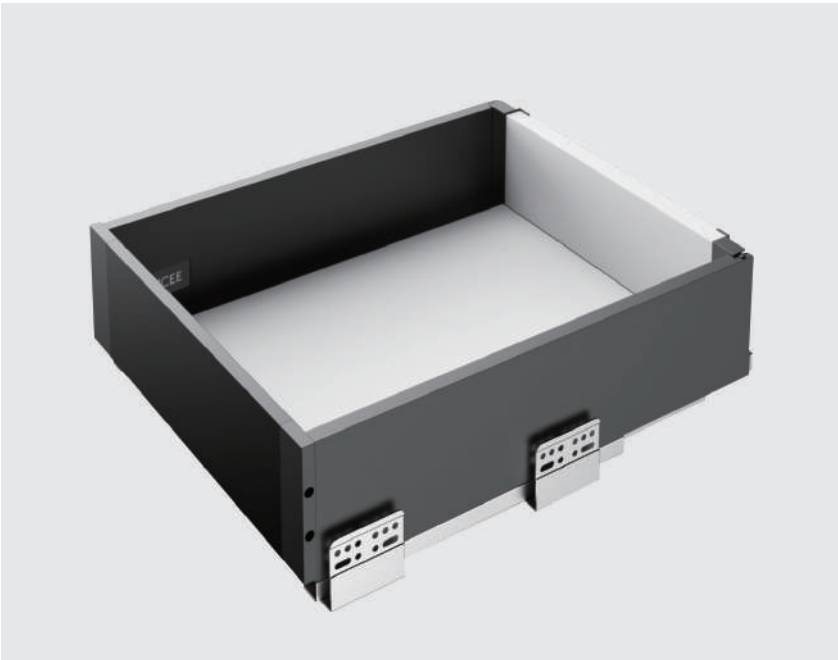


TN86

产品介绍 Product Introduction

- 厨房收纳好帮手。
- 简约外形，流线设计，高端材质，浑然天成将厨房家具优雅的感觉提升到新的高度。
- Kitchen organizer is a good helper.
- Simple shape, streamlined design, high-end materials, natural and natural to elevate the elegant sense of kitchen furniture to a new level.

薄侧帮低内抽 Slim low side panel inner drawer


柜体所需空间 Space Required For Cabinet

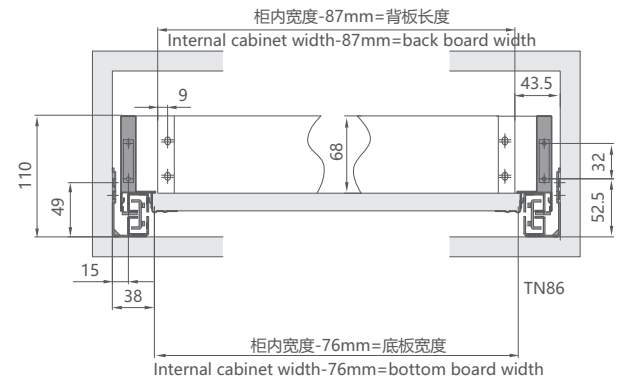


背板尺寸:
背板长度(柜内宽度-87mm)*背板高度(TN86=86mm)*16mm(选配18mm)
Back board :
back board length (internal cabiner width-87mm) *
back board height (TN86=86mm) *16mm (Optional 18mm)

底板尺寸:
底板宽度(柜内宽度-76mm)*底板深度(系列长度)*16mm(选配18mm)
Bottom board:
bottom board width (internal cabiner width-76mm) *
back board depth (norminal length) *16mm (Optional 18mm)

阻尼滑轨孔位图 Damping Slide Hole Position

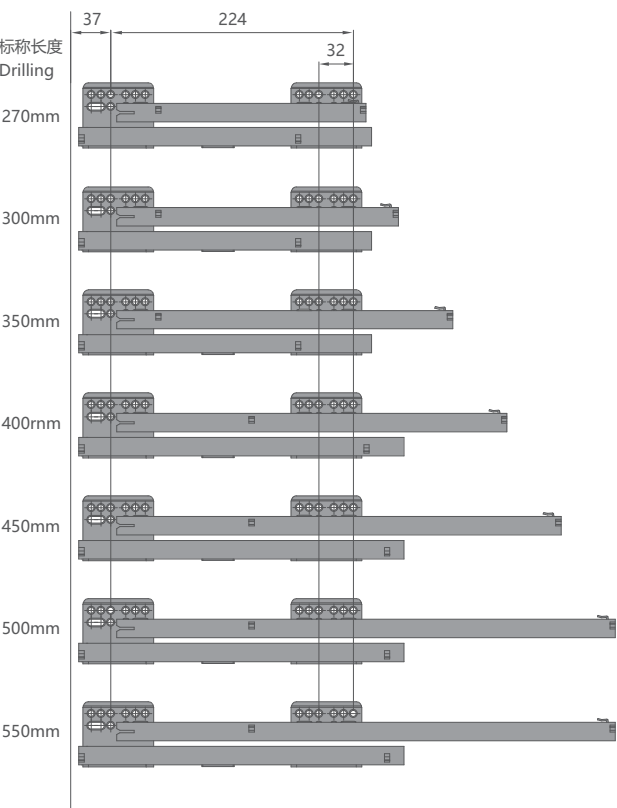






基本步骤 Installation

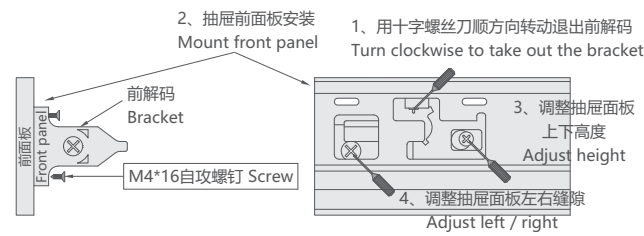





订购信息 Ordering Information

产品型号 Item No.	滑轨长度 Norminal Length	抽屉最小安装长度 Min. internal Cabinet Depth	侧板高度 Side panel Height
TN86-270	270mm	290mm	86mm
TN86-300	300mm	320mm	86mm
TN86-350	350mm	370mm	86mm
TN86-400	400mm	420mm	86mm
TN86-450	450mm	470mm	86mm
TN86-500	500mm	520mm	86mm

薄侧帮低内抽安装步骤 Installation steps

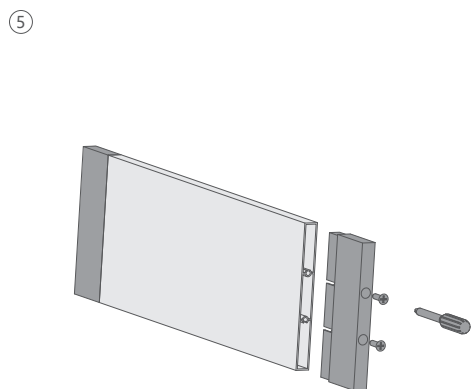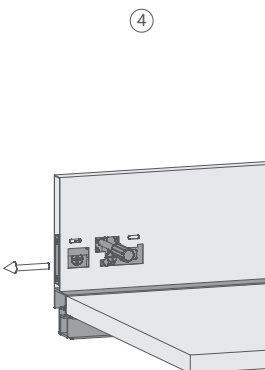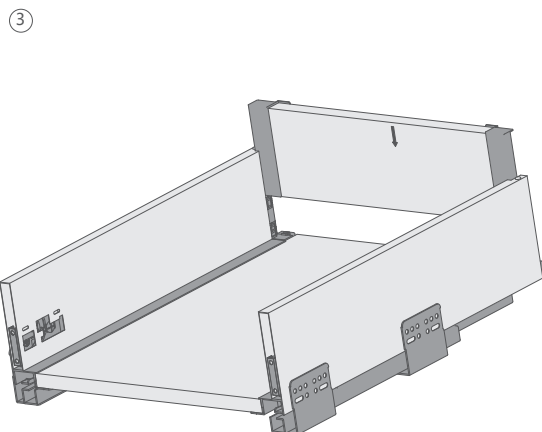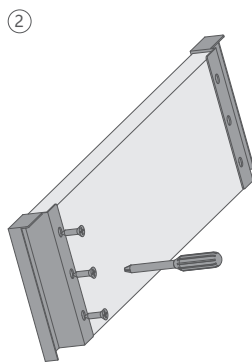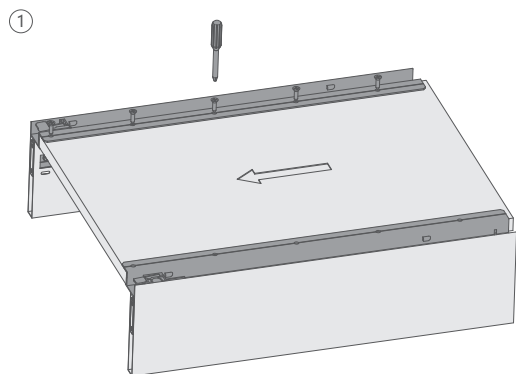


薄侧帮低内抽安装步骤 Installation steps

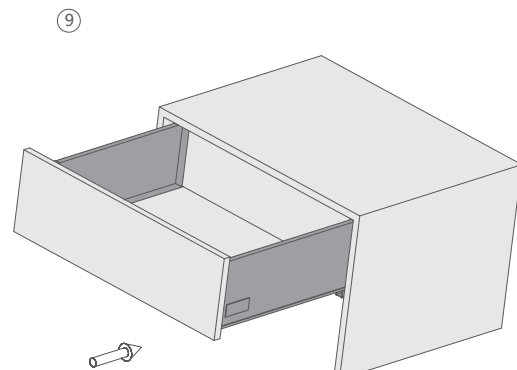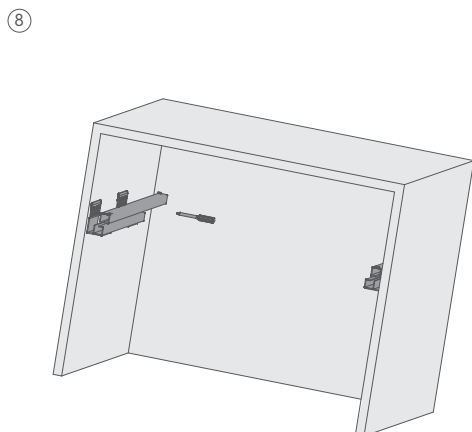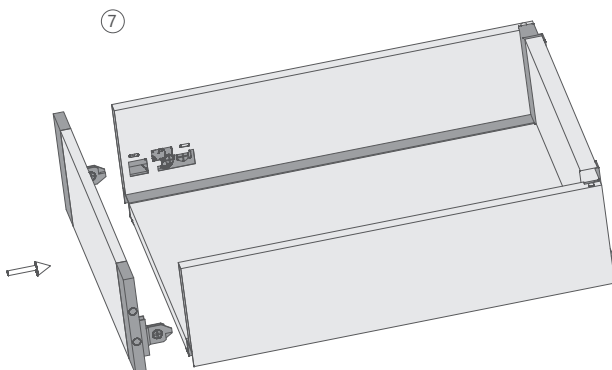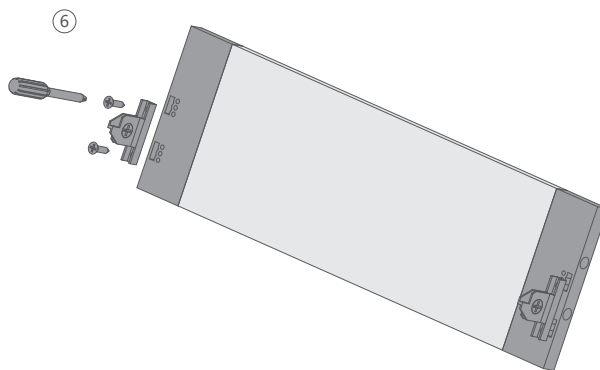

按照箭头方向推入抽屉完成安装
According to the direction of the arrow into
the drawer to complete the installation

薄侧帮高内抽(玻璃) Slim low side panel inner drawer(glass)

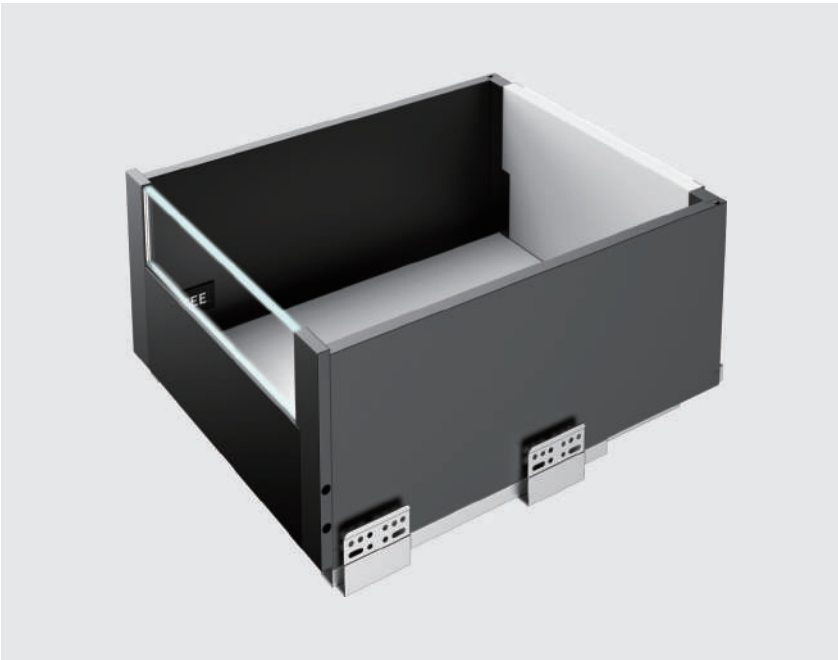


DN150

产品介绍 Product Introduction

- 厨房收纳好帮手。
- 简约外形，流线设计，高端材质，浑然天成将厨房家具优雅的感觉提升到新的高度。
- Kitchen organizer is a good helper.
- Simple shape, streamlined design, high-end materials, natural and natural to elevate the elegant sense of kitchen furniture to a new level.

薄侧帮高内抽(玻璃) Slimlow side panel inner drawer(glass)


柜体所需空间 Space Required For Cabinet

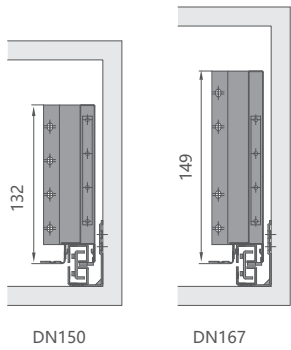


背板尺寸:
当背板长度(柜内宽度-87mm)*背板高度 (DN150=150mm/DN167=167mm)*16mm(选配18mm)
Back board :
back board length (internal cabiner width-87mm) *back board height (DN150=150mm/DN167=167mm)*
16mm (Optional 18mm)

底板尺寸:
底板宽底(柜内宽底-76mm)*底板深度(系列长度) :16mm(选配18mm)
Bottom board:
bottom board width (internal cabiner width-76mm) *back board depth(norminal length) *
16mm (Optional 18mm)

阻尼滑轨孔位图 Damping Slide Hole Position

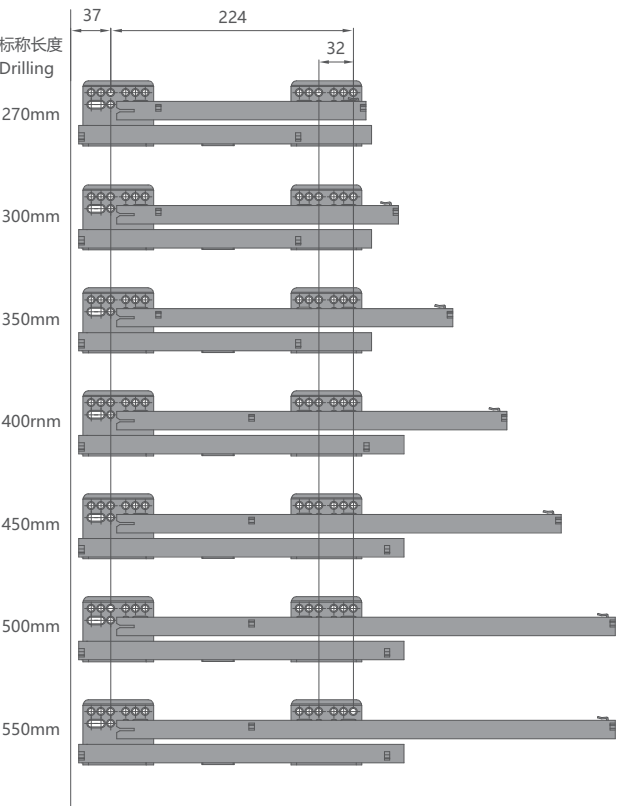


基本步骤 Installation

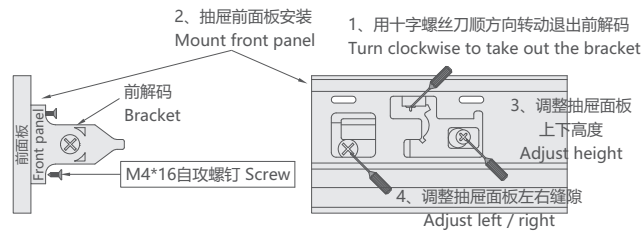


订购信息 Ordering Information

产品型号 Item No.		滑轨长度 Norminal Length	抽屉最小安装长度 Min. internal Cabinet Depth	侧板高度 Side panel Height
DN150-270	DN167-270	270mm	290mm	150、167mm
DN150-300	DN167-300	300mm	320mm	150、167mm
DN150-350	DN167-350	350mm	370mm	150、167mm
DN150-400	DN167-400	400mm	420mm	150、167mm
DN150-450	DN167-450	450mm	470mm	150、167mm
DN150-500	DN167-500	500mm	520mm	150、167mm

薄侧帮高内抽玻璃款安装步骤 Installation steps

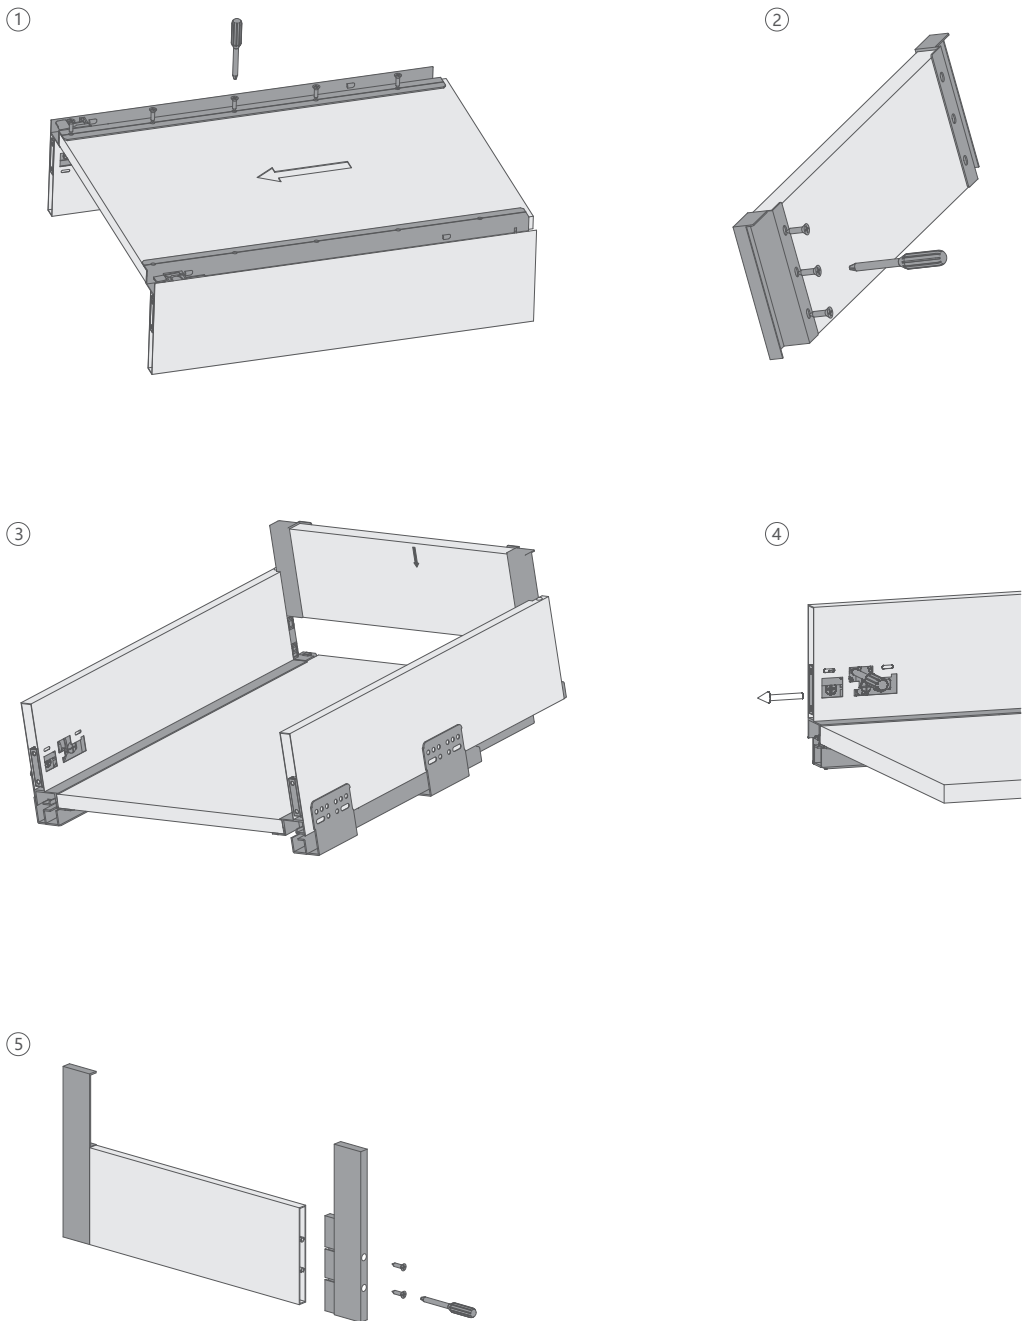


薄侧帮高内抽玻璃款安装步骤 Installation steps

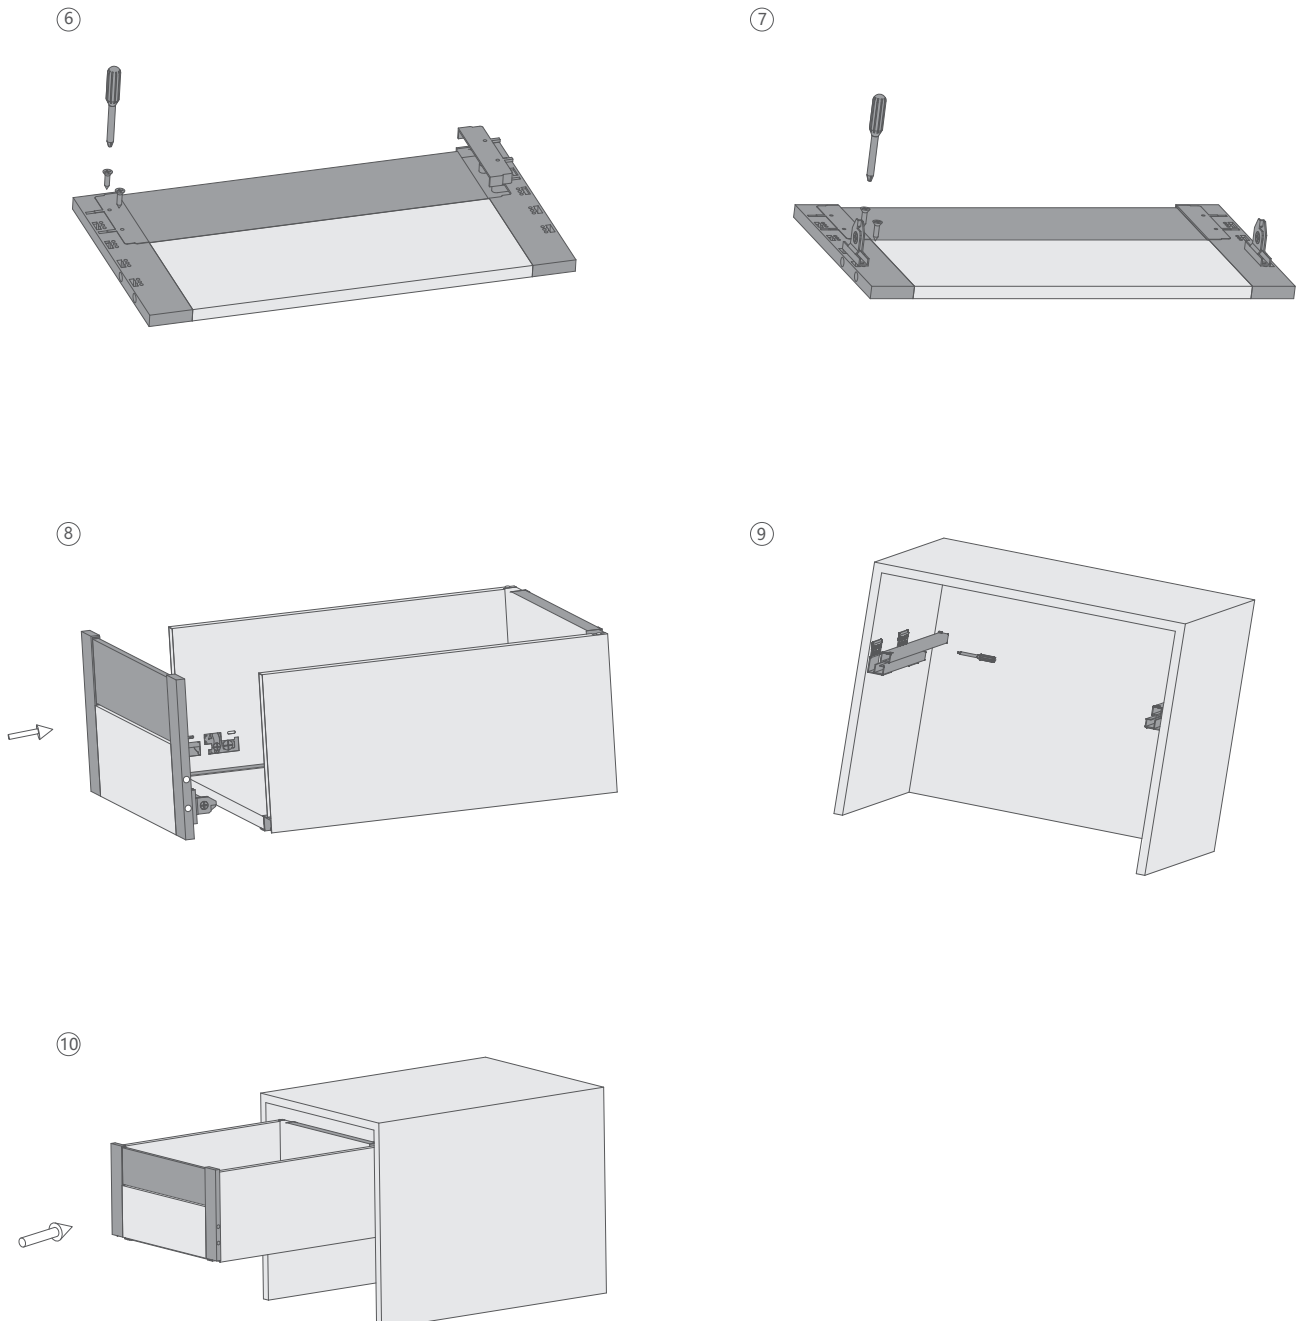

按照箭头方向推入抽屉完成安装
According to the direction of the arrow into
the drawer to complete the installation

薄侧帮高内抽(粗杆)系列 Slim low side panel inner drawer (thick rail)

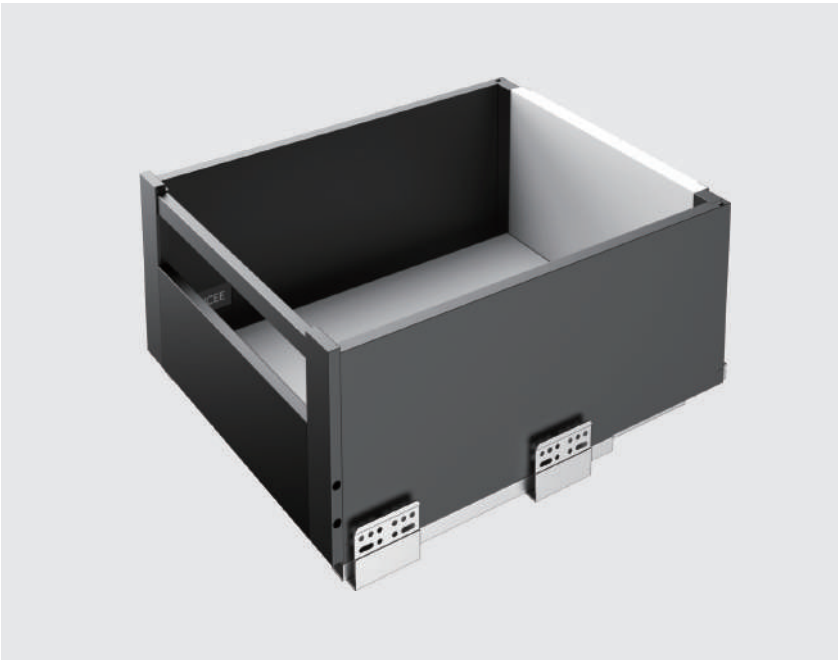

N150

产品介绍 Product Introduction


- 厨房收纳好帮手。
- 简约外形，流线设计，高端材质，浑然天成将厨房家具优雅的感觉提升到新的高度。
- Kitchen organizer is a good helper.
- Simple shape, streamlined design, high-end materials, natural and natural to elevate the elegant sense of kitchen furniture to a new level.

薄侧帮高内抽(粗杆)系列 Slim low side panel inner drawer (thick rail)


柜体所需空间 Space Required For Cabinet



阻尼滑轨孔位图 Damping Slide Hole Position

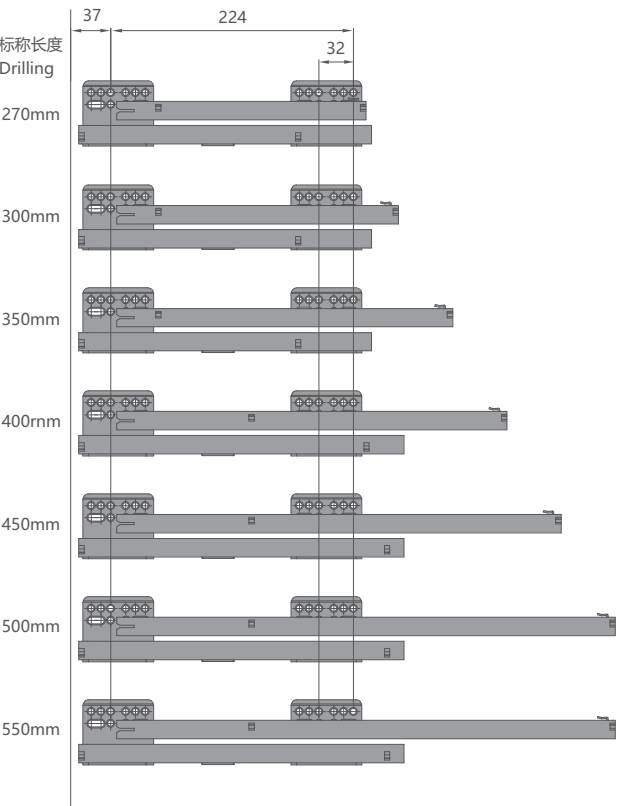


基本步骤 Installation

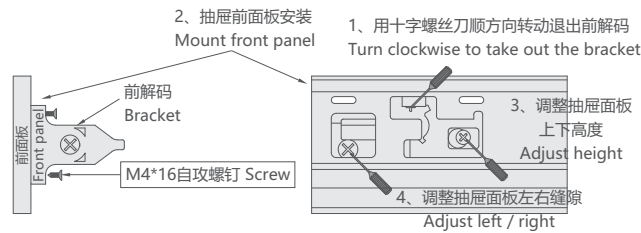


订购信息 Ordering Information

产品型号 Item No.		滑轨长度 Norminal Length	抽屉最小安装长度 Min. internal Cabinet Depth	侧板高度 Side panel Height
N150-270	N167-270	270mm	290mm	150、167mm
N150-300	N167-300	300mm	320mm	150、167mm
N150-350	N167-350	350mm	370mm	150、167mm
N150-400	N167-400	400mm	420mm	150、167mm
N150-450	N167-450	450mm	470mm	150、167mm
N150-500	N167-500	500mm	520mm	150、167mm

薄侧帮高内抽粗杆安装步骤 Installation steps

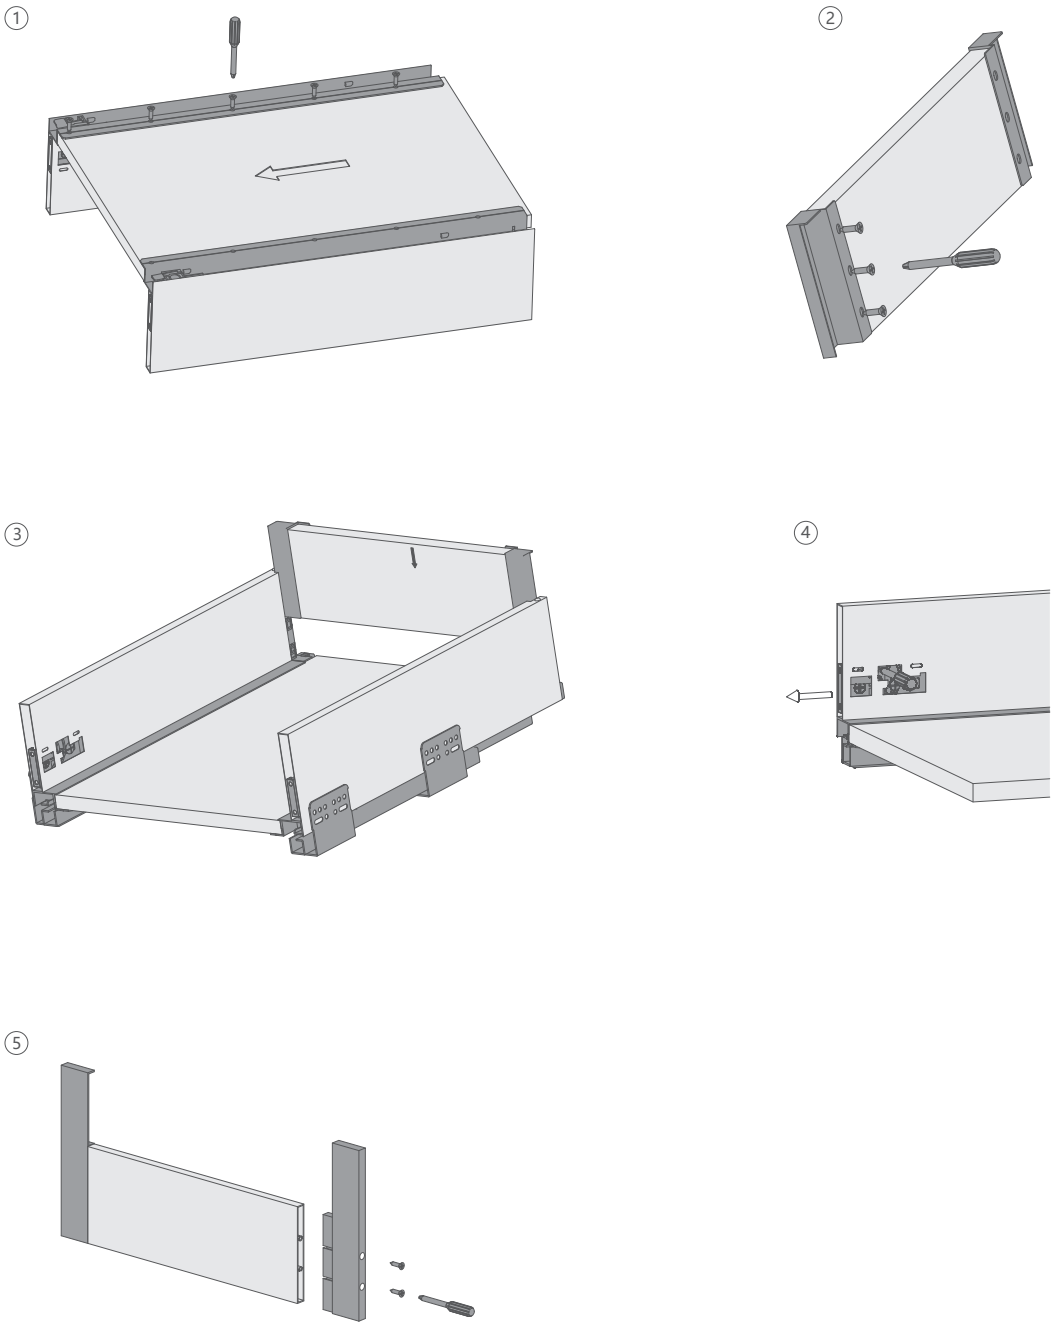

薄侧帮高内抽粗杆安装步骤 Installation steps

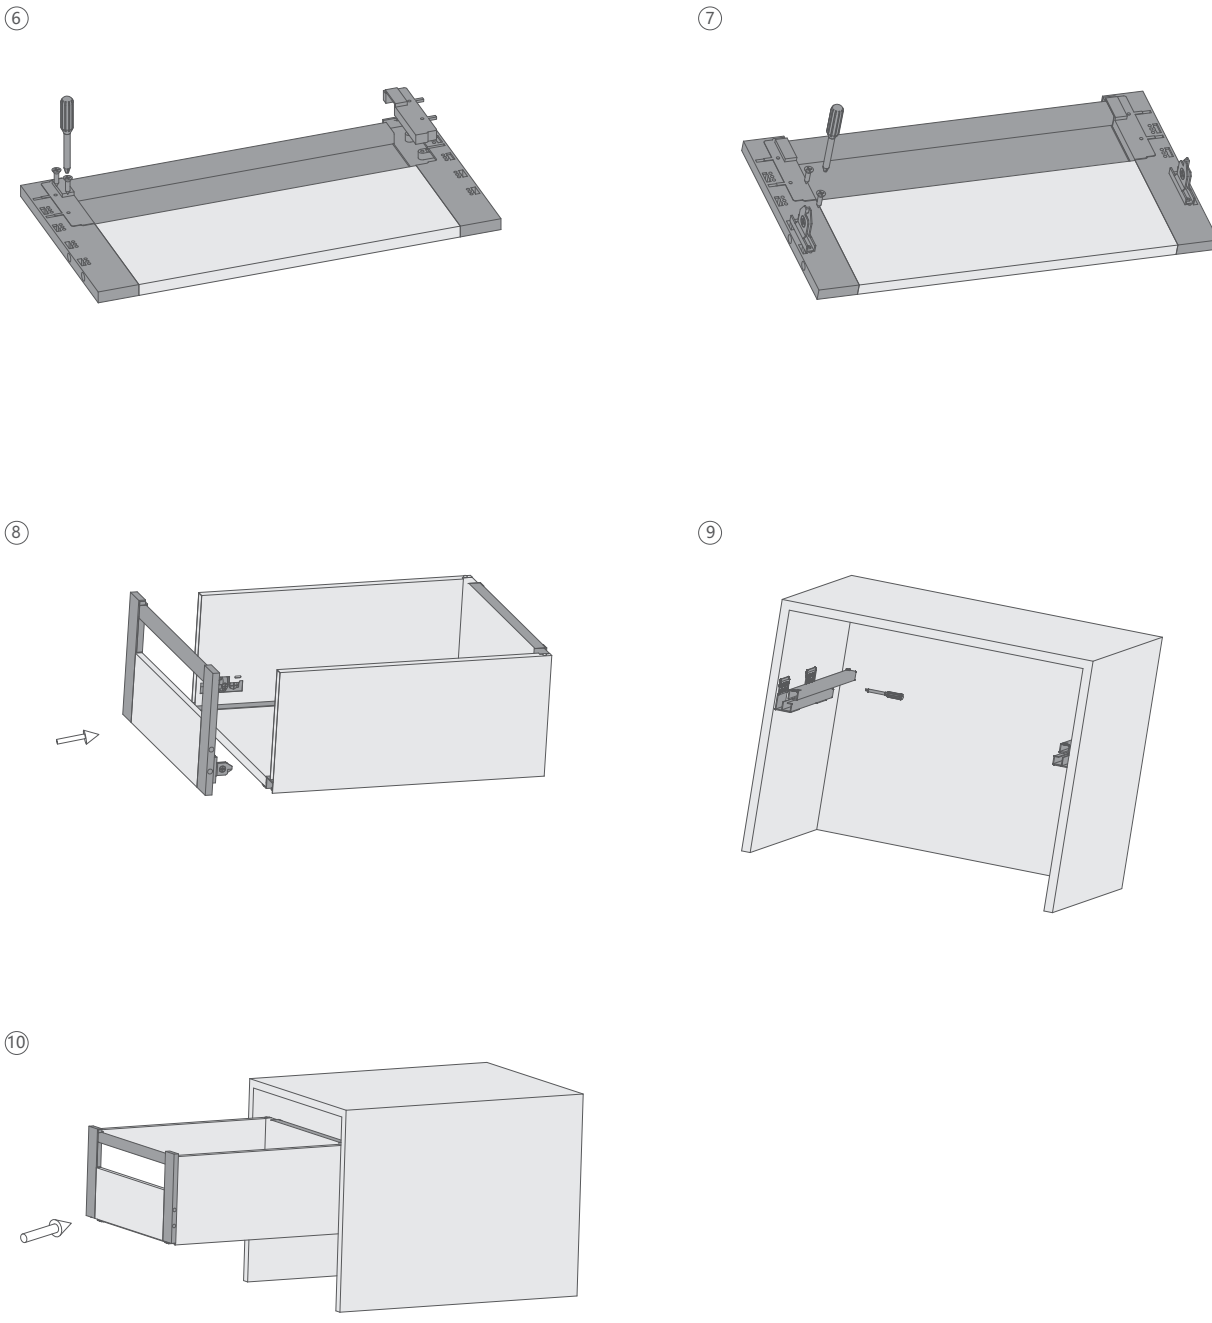

按照箭头方向推入抽屉完成安装
According to the direction of the arrow into the drawer to complete the installation

HEALTHY KITCHEN STORAGE SYSTEM

健康厨房收纳系统

科学分区收纳，食材工具一目了然，防潮防尘厨房更健康！
Smart zoning storage keeps ingredients and tools visible, while moisture-proof and dust-resistant design ensures a healthier kitchen!



经典智能健康铝合金抽-浅抽 THREE-SIDE BASKET

产品详情信息
Product Details



智能模式

拉出-灯光亮起
推回-杀菌灯亮起(30分钟关闭)

安全

杀菌灯是在抽屉关闭的时候亮起
完全封闭状态
不会照射到人体
不会对人体造成伤害
抽屉用的电源也是带有3C国家认证

特色

抽屉带灯
解决抽屉内部照明的问题
无需要柜体单独再装灯条
紫外线杀菌
提供了健康便捷
无需要在单独安装消毒柜

操作

可推拉
可反弹 (提前备注)

内含

铝合金主体配橡木装饰板
海蒂诗450轨道
灯光4500K色温
紫外线杀菌灯

连接

总功率16w
额定电压12V
电流2A
电源线弹簧线带杜邦插头
插头不分正负极
变压器为LED橱柜专用12V

SC-QC

产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌

柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
800	764x471x138mm
900	864x471x138mm
1000	964x471x138mm
1100	1064x471x138mm
1200	1164x471x138mm


清洁

用潮湿抹布擦拭既可
避免与酸、碱接触，酱油、盐等撒在抽屉里，请注意及时清洁
后灯板部位不要有水进入，以防灯板短路

规则注意事项

设计前看好抽屉使用参数
柜子里面要提前预留好220v插座
安装前请仔细阅读安装说明
安装轨道时切记不要让木屑、沙
尘飞入轨道内部，否则轨道会发生异响！
抽屉电压为12V，其他伏数不可用

技术参数 Technical information

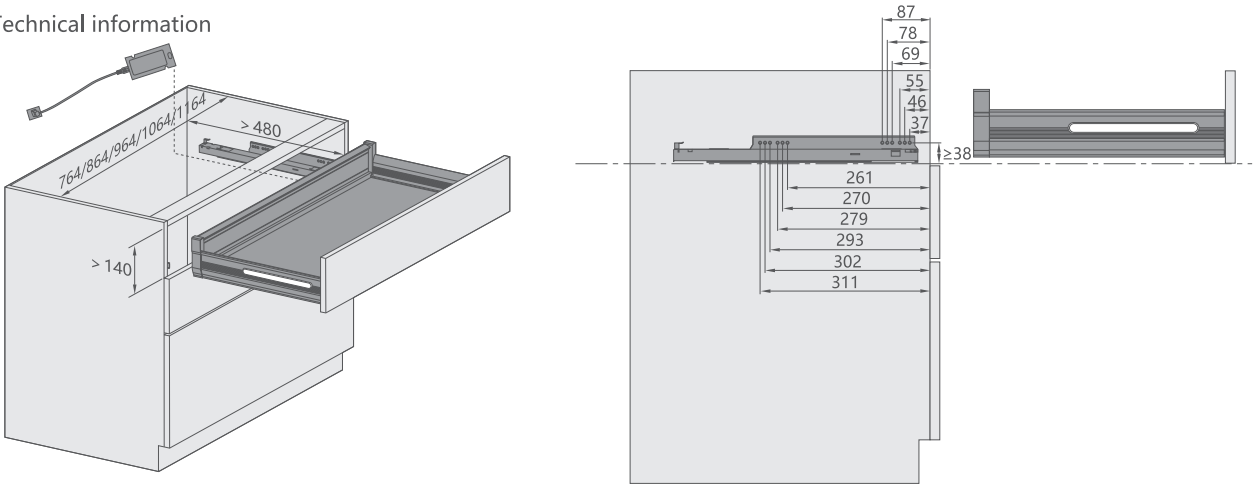

800柜 经典刀叉铝合金收纳抽屉 THREE-SIDE BASKET

■ 标配模块



SC-QC-800A01

产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌



柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
800	764x471x138mm

900柜 经典刀叉铝合金收纳抽屉 THREE-SIDE BASKET

■ 标配模块



SC-QC-900A01

产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌



柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
900	864x471x138mm

经典智能健康铝合金抽-浅抽 THREE-SIDE BASKET

定制选配模块



浅抽组合800	A组	B组	C组

浅抽组合900	A组	B组	C组

经典智能健康铝合金抽-浅抽 THREE-SIDE BASKET


定制选配模块

浅抽组合1000	A组	B组	C组

浅抽组合1100	A组	B组	C组

浅抽组合1200	A组	B组	C组

经典智能健康铝合金抽-高抽 THREE-SIDE BASKET

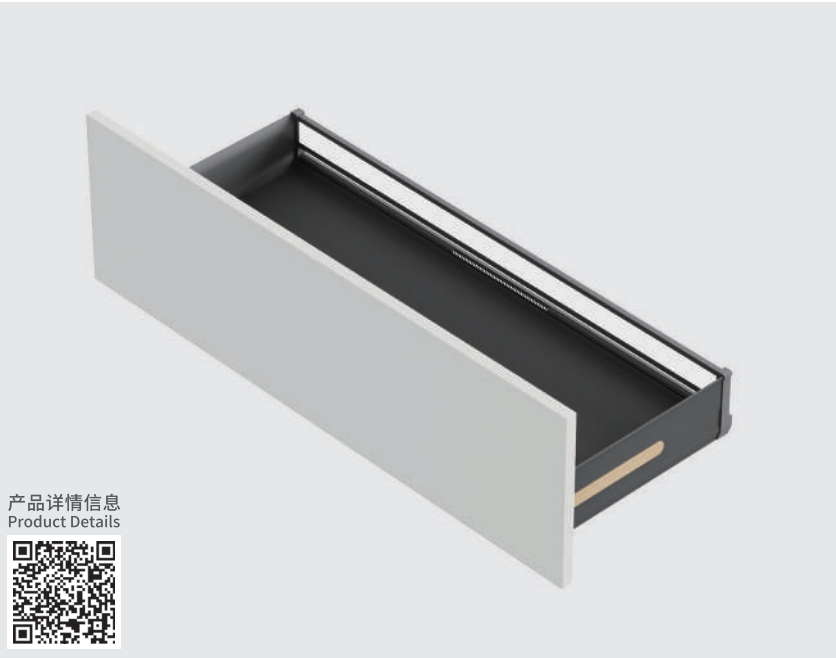

SC-QC

产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌

柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
800	764x475x167mm
900	864x475x167mm
1000	964x475x167mm
1100	1064x475x167mm
1200	1164x475x167mm

智能模式

拉出-灯光亮起
推回-杀菌灯亮起(30分钟关闭)

安全

杀菌灯是在抽屉关闭的时候亮起
完全封闭状态
不会照射到人体
不会对人体造成伤害
抽屉用的电源也是带有3C国家认证

特色

抽屉带灯
解决抽屉内部照明的问题
不需要柜体单独再装灯条
紫外线杀菌
提供了健康便捷
不需要在单独安装消毒柜

操作

可推拉
可反弹 (提前备注)

内含

铝合金主体配橡木装饰板
海蒂诗450轨道
灯光4500K色温
紫外线杀菌灯

连接

总功率16w
额定电压12V
电流2A
电源线弹簧线带杜邦插头
插头不分正负极
变压器为LED橱柜专用12V


清洁

用潮湿抹布擦拭既可
避免与酸、碱接触，酱油、盐等撒在抽屉里，请注意及时清洁
后灯板部位不要有水进入，以防灯板短路

规则注意事项

设计前看好抽屉使用参数
柜子里面要提前预留好220v插座
安装前请仔细阅读安装说明
安装轨道时切记不要让木屑、沙
尘飞入轨道内部，否则轨道会发生异响！
抽屉电压为12V，其他伏数不可用

技术参数 Technical information

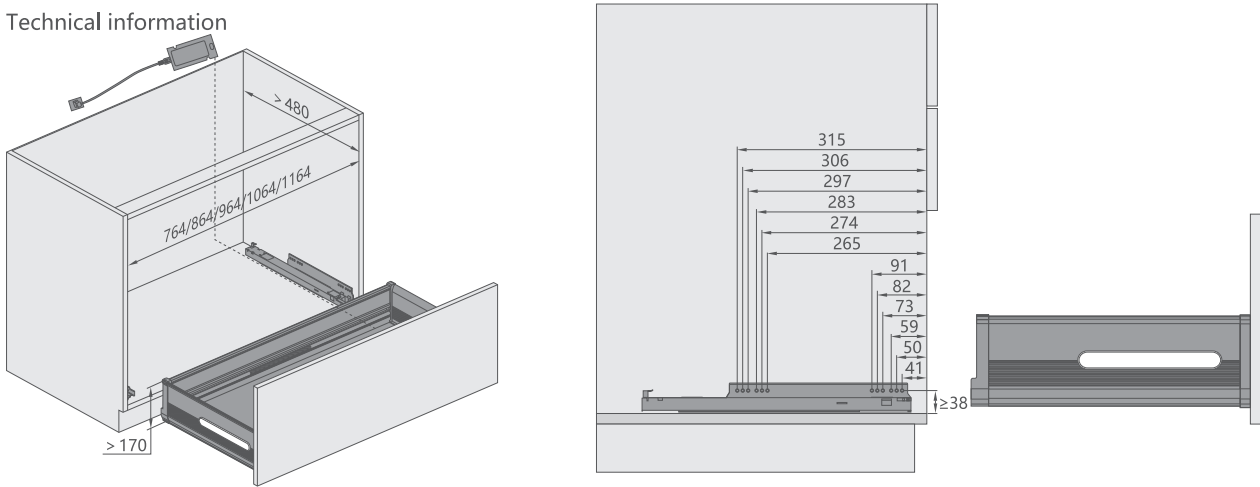

800柜 经典碗碟铝合金收纳抽屉 THREE-SIDE BASKET 标配模块



SC-QC-800B01

产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌

柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
800	764x475x167mm

800柜 经典锅具铝合金收纳抽屉 THREE-SIDE BASKET 标配模块



SC-QC-800C01

产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌

柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
800	764x475x167mm

900柜 经典碗碟铝合金收纳抽屉 THREE-SIDE BASKET 标配模块



SC-QC-900B01

产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌

柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
900	864x475x167mm

900柜 经典锅具铝合金收纳抽屉 THREE-SIDE BASKET 标配模块



SC-QC-900C01


产品特点 Product Features

- 轨道暗藏式，全拉式
- 使用内置式阻尼，确保关闭时柔和安静
- 铝合金抽屉黑色和白色
- 抽屉底板晶石板，防水、防火
- 超宽发光板集中内部照明
- 动态负载，40KG和70KG
- 所有配件均为金属件工艺，更耐用
- 紫外线杀菌，远离细菌

柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
900	864x475x167mm

经典智能健康铝合金抽-高抽 THREE-SIDE BASKET

定制选配模块

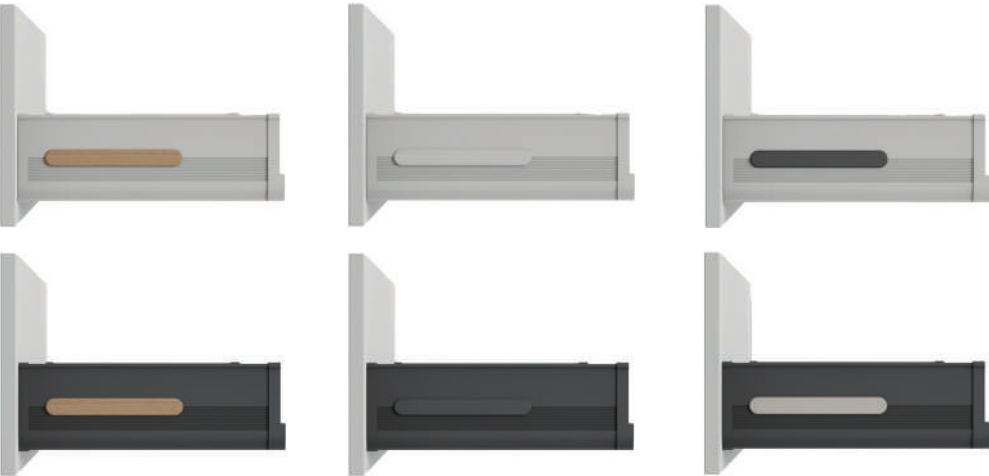

碗底篮组合800	A组	B组	C组

碗底篮组合900	A组	B组	C组

经典智能健康铝合金抽-高抽 THREE-SIDE BASKET

定制选配模块

碗底篮组合1000	A组	B组	C组

碗底篮组合1100	A组	B组	C组

碗底篮组合1200	A组	B组	C组

搭配配件 COMPONENTS

定制选配模块

经典智能健康铝合金抽-高抽 THREE-SIDE BASKET

定制选配模块



产品型号 Item No.	SC-CW-A-100
名称 Name	100储物盒
尺寸 Size	100× 58× 420mm




产品型号 Item No.	SC-CW-J-150
名称 Name	150调料盒
尺寸 Size	150× 58× 420mm



产品型号 Item No.	SC-CW-B-150
名称 Name	150储物盒黑
尺寸 Size	150× 58× 420mm



产品型号 Item No.	SC-CW-C-150
名称 Name	150储物盒白
尺寸 Size	150× 58× 420mm



产品型号 Item No.	SC-CW-D-260
名称 Name	260刀叉盒黑
尺寸 Size	260× 58× 420mm



产品型号 Item No.	SC-CW-E-260
名称 Name	260刀叉盒白
尺寸 Size	260× 58× 420mm



产品型号 Item No.	SC-CW-F-220
名称 Name	220保鲜锡纸盒黑
尺寸 Size	220× 58× 420mm



产品型号 Item No.	SC-CW-G-220
名称 Name	220保鲜锡纸盒白
尺寸 Size	220× 58× 420mm




产品型号 Item No.	SC-CW-H-150
名称 Name	150组合刀具盒黑
尺寸 Size	150× 58× 420mm



产品型号 Item No.	SC-CW-I-150
名称 Name	150组合刀具盒白
尺寸 Size	150× 58× 420mm



产品型号 Item No.	SC-CW-K-324
名称 Name	324刀叉盒
尺寸 Size	324× 58× 420mm



产品型号 Item No.	SC-CW-L-330
名称 Name	330多功能立体方格盘
尺寸 Size	330× 58× 420mm




产品型号 Item No.	SC-CW-M-133
名称 Name	133物品收纳盒黑
尺寸 Size	133× 120× 300mm



产品型号 Item No.	SC-CW-N-133
名称 Name	133物品收纳盒白
尺寸 Size	133× 120× 300mm



产品型号 Item No.	SC-CW-O-260
名称 Name	260插盘架黑
尺寸 Size	260× 62× 400mm



产品型号 Item No.	SC-CW-P-260
名称 Name	260插盘架白
尺寸 Size	260× 62× 400mm



产品型号 Item No.	SC-CW-Q-160
名称 Name	160插碗架黑
尺寸 Size	160× 40× 400mm



产品型号 Item No.	SC-CW-R-160
名称 Name	160插碗架白
尺寸 Size	160× 40× 400mm



产品型号 Item No.	SC-CW-S-200
名称 Name	200置物长方盒黑
尺寸 Size	200× 120× 400mm



产品型号 Item No.	SC-CW-T-200
名称 Name	200置物长方盒白
尺寸 Size	200× 120× 400mm



产品型号 Item No.	SC-CW-M-200
名称 Name	200小盒一组 (4个1组)
尺寸 Size	200× 58× 420mm

天斯 TINCEE



丽斯卡系列

卡地亚玫瑰金+保时捷冰梅粉皮

WARDROBE STORAGE SYSTEM | 衣柜收纳系统



伊格尔系列

法拉利钛灰色+宾利咖啡棕色

抽屉关闭



紫外线杀菌模式

抽屉开启



LED照明模式



天斯 TINCEE

WARDROBE STORAGE SYSTEM



衣柜收纳系统

视觉+嗅觉的双重享受

精心设计一缕喷香，衣物仿佛被赋予了灵魂，让每一次穿戴都成为一场嗅觉的旅行，香气悠长，令人难忘。在视觉呈现上，设计师巧妙融入了英伦复古元素，每一处细节都经过精雕细琢，展现出一种轻奢而高贵的气质。从精致的图案到复古的色调，无不透露出对经典与时尚的深刻理解与致敬，让人一眼便能感受到那份独特的品味与格调。

A Dual Sensory Experience: Visual & Olfactory

The wardrobe storage drawer can be infused with fragrance. The designer ingeniously incorporates British vintage elements, exuding a refined and luxurious charm. From intricate patterns to retro color tones, the design pays homage to both classic and contemporary aesthetics.

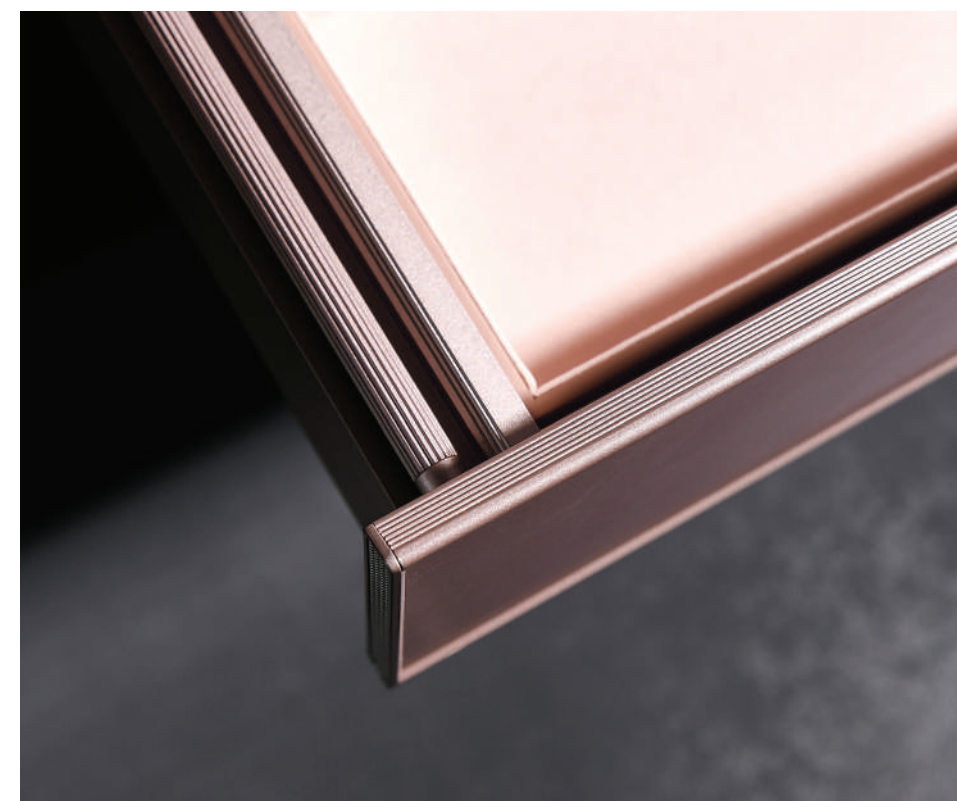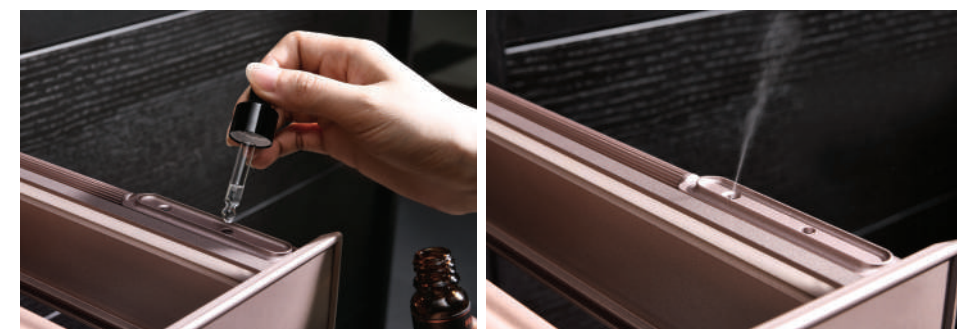

腰带收纳篮 BELT STORAGE BASKET

SC-EYI-06

产品特点 Product Features

- 8x4大容量格子设计，内含4个隐秘式收纳格子，完美拥抱各式杂乱的腰带、领带与丝巾。凭借其卓越的存储空间，分门别类，一目了然，赋予你无限可能。
- Featuring an 8x4 large-capacity grid design, including four hidden compartments, this storage basket is perfect for organizing belts, ties, and scarves.




卡地亚玫瑰金+保时捷冰梅粉皮



法拉利钛灰色+宾利咖啡棕色

技术参数 Technical information

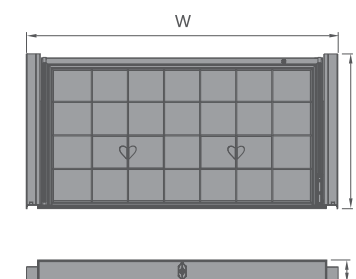

卡地亚玫瑰金+保时捷冰梅粉皮 型号 Item No.	法拉利钛灰色+宾利咖啡棕色 型号 Item No.	柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
SC-EYI-06-800	SC-EYI-06G-800	800	(764-766)x485x70mm
SC-EYI-06-900	SC-EYI-06G-900	900	(864-866)x485x70mm
SC-EYI-06-1000	SC-EYI-06G-1000	1000	(964-966)x485x70mm



产品详情信息
Product Details

裤挂架 TROUSERS RACK



SC-EYI-02

产品特点 Product Features

- 防褶皱裤杆，使用了裤子在悬挂中不留痕迹的材料，使衣物保持垂坠；可根据衣物厚度增加或删减，拿取方便；贴心设计裤杆防脱落磁扣，防止轻薄丝滑的裤子脱落。
- Designed with wrinkle-free hanging rods, made from mark-free materials to keep clothes draping naturally. The structure allows for adjustable rods to accommodate different garment thicknesses and includes magnetic anti-slip locks to prevent trousers from falling.




卡地亚玫瑰金+保时捷冰梅粉皮



法拉利钛灰色+宾利咖啡棕色

技术参数 Technical information

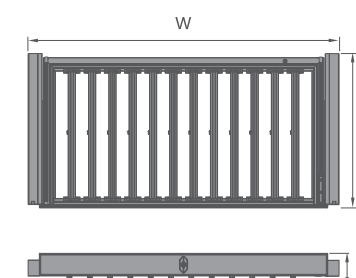

卡地亚玫瑰金+保时捷冰梅粉皮 型号 Item No.	法拉利钛灰色+宾利咖啡棕色 型号 Item No.	柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
SC-EYI-02-800	SC-EYI-02G-800	800	(764-766)x485x100mm
SC-EYI-02-900	SC-EYI-02G-900	900	(864-866)x485x100mm
SC-EYI-02-1000	SC-EYI-02G-1000	1000	(964-966)x485x100mm



衣物篮 CLOTHING BASKET

SC-EYI-04

产品特点 Product Features

- 超大容量设计，承重高达20KG，稳固耐用。防潮防腐材质，持久清新香氛，呵护每一件衣物。科学分区布局，各类衣物有序存放，取用便捷。专为厚重衣物打造，轻松满足大件收纳需求，让您的衣柜井井有条，焕然一新。
- With a high-capacity design supporting up to 20KG, this storage solution is ideal for bulky garments, ensuring a seamless and organized wardrobe experience.




卡地亚玫瑰金+保时捷冰梅粉皮



法拉利钛灰色+宾利咖啡棕色

技术参数 Technical information

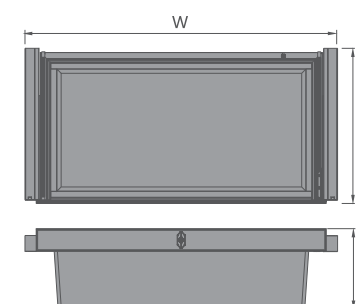

卡地亚玫瑰金+保时捷冰梅粉皮 型号 Item No.	法拉利钛灰色+宾利咖啡棕色 型号 Item No.	柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
SC-EYI-04-800	SC-EYI-04G-800	800	(764-766)x485x249mm
SC-EYI-04-900	SC-EYI-04G-900	900	(864-866)x485x249mm
SC-EYI-04-1000	SC-EYI-04G-1000	1000	(964-966)x485x249mm

产品详情信息
Product Details



多功能首饰盒 MULTI-FUNCTIONAL JEWELRY BOX



SC-EYI-05

产品特点 Product Features

- 当温暖的光线洒落于此，每一寸空间都闪耀着细腻的光泽。精心设计的手表专区、眼镜专区、首饰专区，分区明确，彰显品味。金属与翻毛皮革的巧妙融合，赋予整体奢华质感，尊贵体验触手可及。多格位布局，超大容量，将艺术美学与实用功能完美结合，为您打造一个兼具优雅与实用的精致空间。
- Divided into watch, glasses, and jewelry sections, this luxurious organizer combines metal and suede for a premium feel. Its multi-compartment layout and spacious design create an elegant yet practical storage solution.




卡地亚玫瑰金+保时捷冰梅粉皮



法拉利钛灰色+宾利咖啡棕色

技术参数 Technical information



卡地亚玫瑰金+保时捷冰梅粉皮 型号 Item No.	法拉利钛灰色+宾利咖啡棕色 型号 Item No.	柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
SC-EYI-05-800	SC-EYI-05G-800	800	(764-766)x485x70mm
SC-EYI-05-900	SC-EYI-05G-900	900	(864-866)x485x70mm
SC-EYI-05-1000	SC-EYI-05G-1000	1000	(964-966)x485x70mm



产品详情信息
Product Details

护肤抽屉收纳 SKINCARE DRAWER ORGANIZER

SC-EYI-10

产品特点 Product Features

- 15种规格，23个灵活分区，极致空间利用率，让护肤品收纳井井有条，护肤步骤更高效。为追求品质的女性节省更多时间，轻松拥抱精致生活，焕发自信光彩。
- Optimized for skincare storage, this drawer organizer offers 15 models and 23 compartments, ensuring your beauty products are neatly arranged for an efficient routine.




卡地亚玫瑰金+保时捷冰梅粉皮



法拉利钛灰色+宾利咖啡棕色

技术参数 Technical information

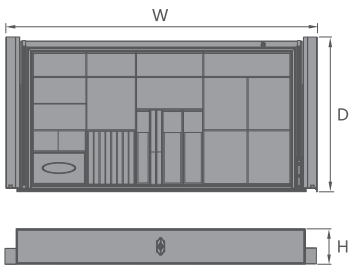

卡地亚玫瑰金+保时捷冰梅粉皮 型号 Item No.	法拉利钛灰色+宾利咖啡棕色 型号 Item No.	柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
SC-EYI-10-800	SC-EYI-10G-800	800	(764-766)x485x110mm
SC-EYI-10-900	SC-EYI-10G-900	900	(864-866)x485x110mm
SC-EYI-10-1000	SC-EYI-10G-1000	1000	(964-966)x485x110mm



产品详情信息
Product Details

内衣抽屉收纳篮 UNDERWEAR STORAGE BASKET

SC-EYI-08

产品特点 Product Features

- 专为内衣设计，分区清晰，浅层收纳一目了然。3种规格，11个灵活格子，最大化利用每一寸空间，告别杂乱无章，轻松实现井井有条。让收纳更高效，生活更精致。
- Exclusively designed for underwear, this storage basket features clearly defined compartments to keep your collection orderly. Available in 3 sizes with 11 adjustable sections, it maximizes every inch of space for optimal storage.




卡地亚玫瑰金+保时捷冰梅粉皮



法拉利钛灰色+宾利咖啡棕色

技术参数 Technical information



卡地亚玫瑰金+保时捷冰梅粉皮 型号 Item No.	法拉利钛灰色+宾利咖啡棕色 型号 Item No.	柜体 Cabinet	产品尺寸(宽x深x高) Product Size (WxDxH)
SC-EYI-08-800	SC-EYI-08G-800	800	(764-766)x485x110mm
SC-EYI-08-900	SC-EYI-08G-900	900	(864-866)x485x110mm
SC-EYI-08-1000	SC-EYI-08G-1000	1000	(964-966)x485x110mm



产品详情信息
Product Details

天斯 TINCEE